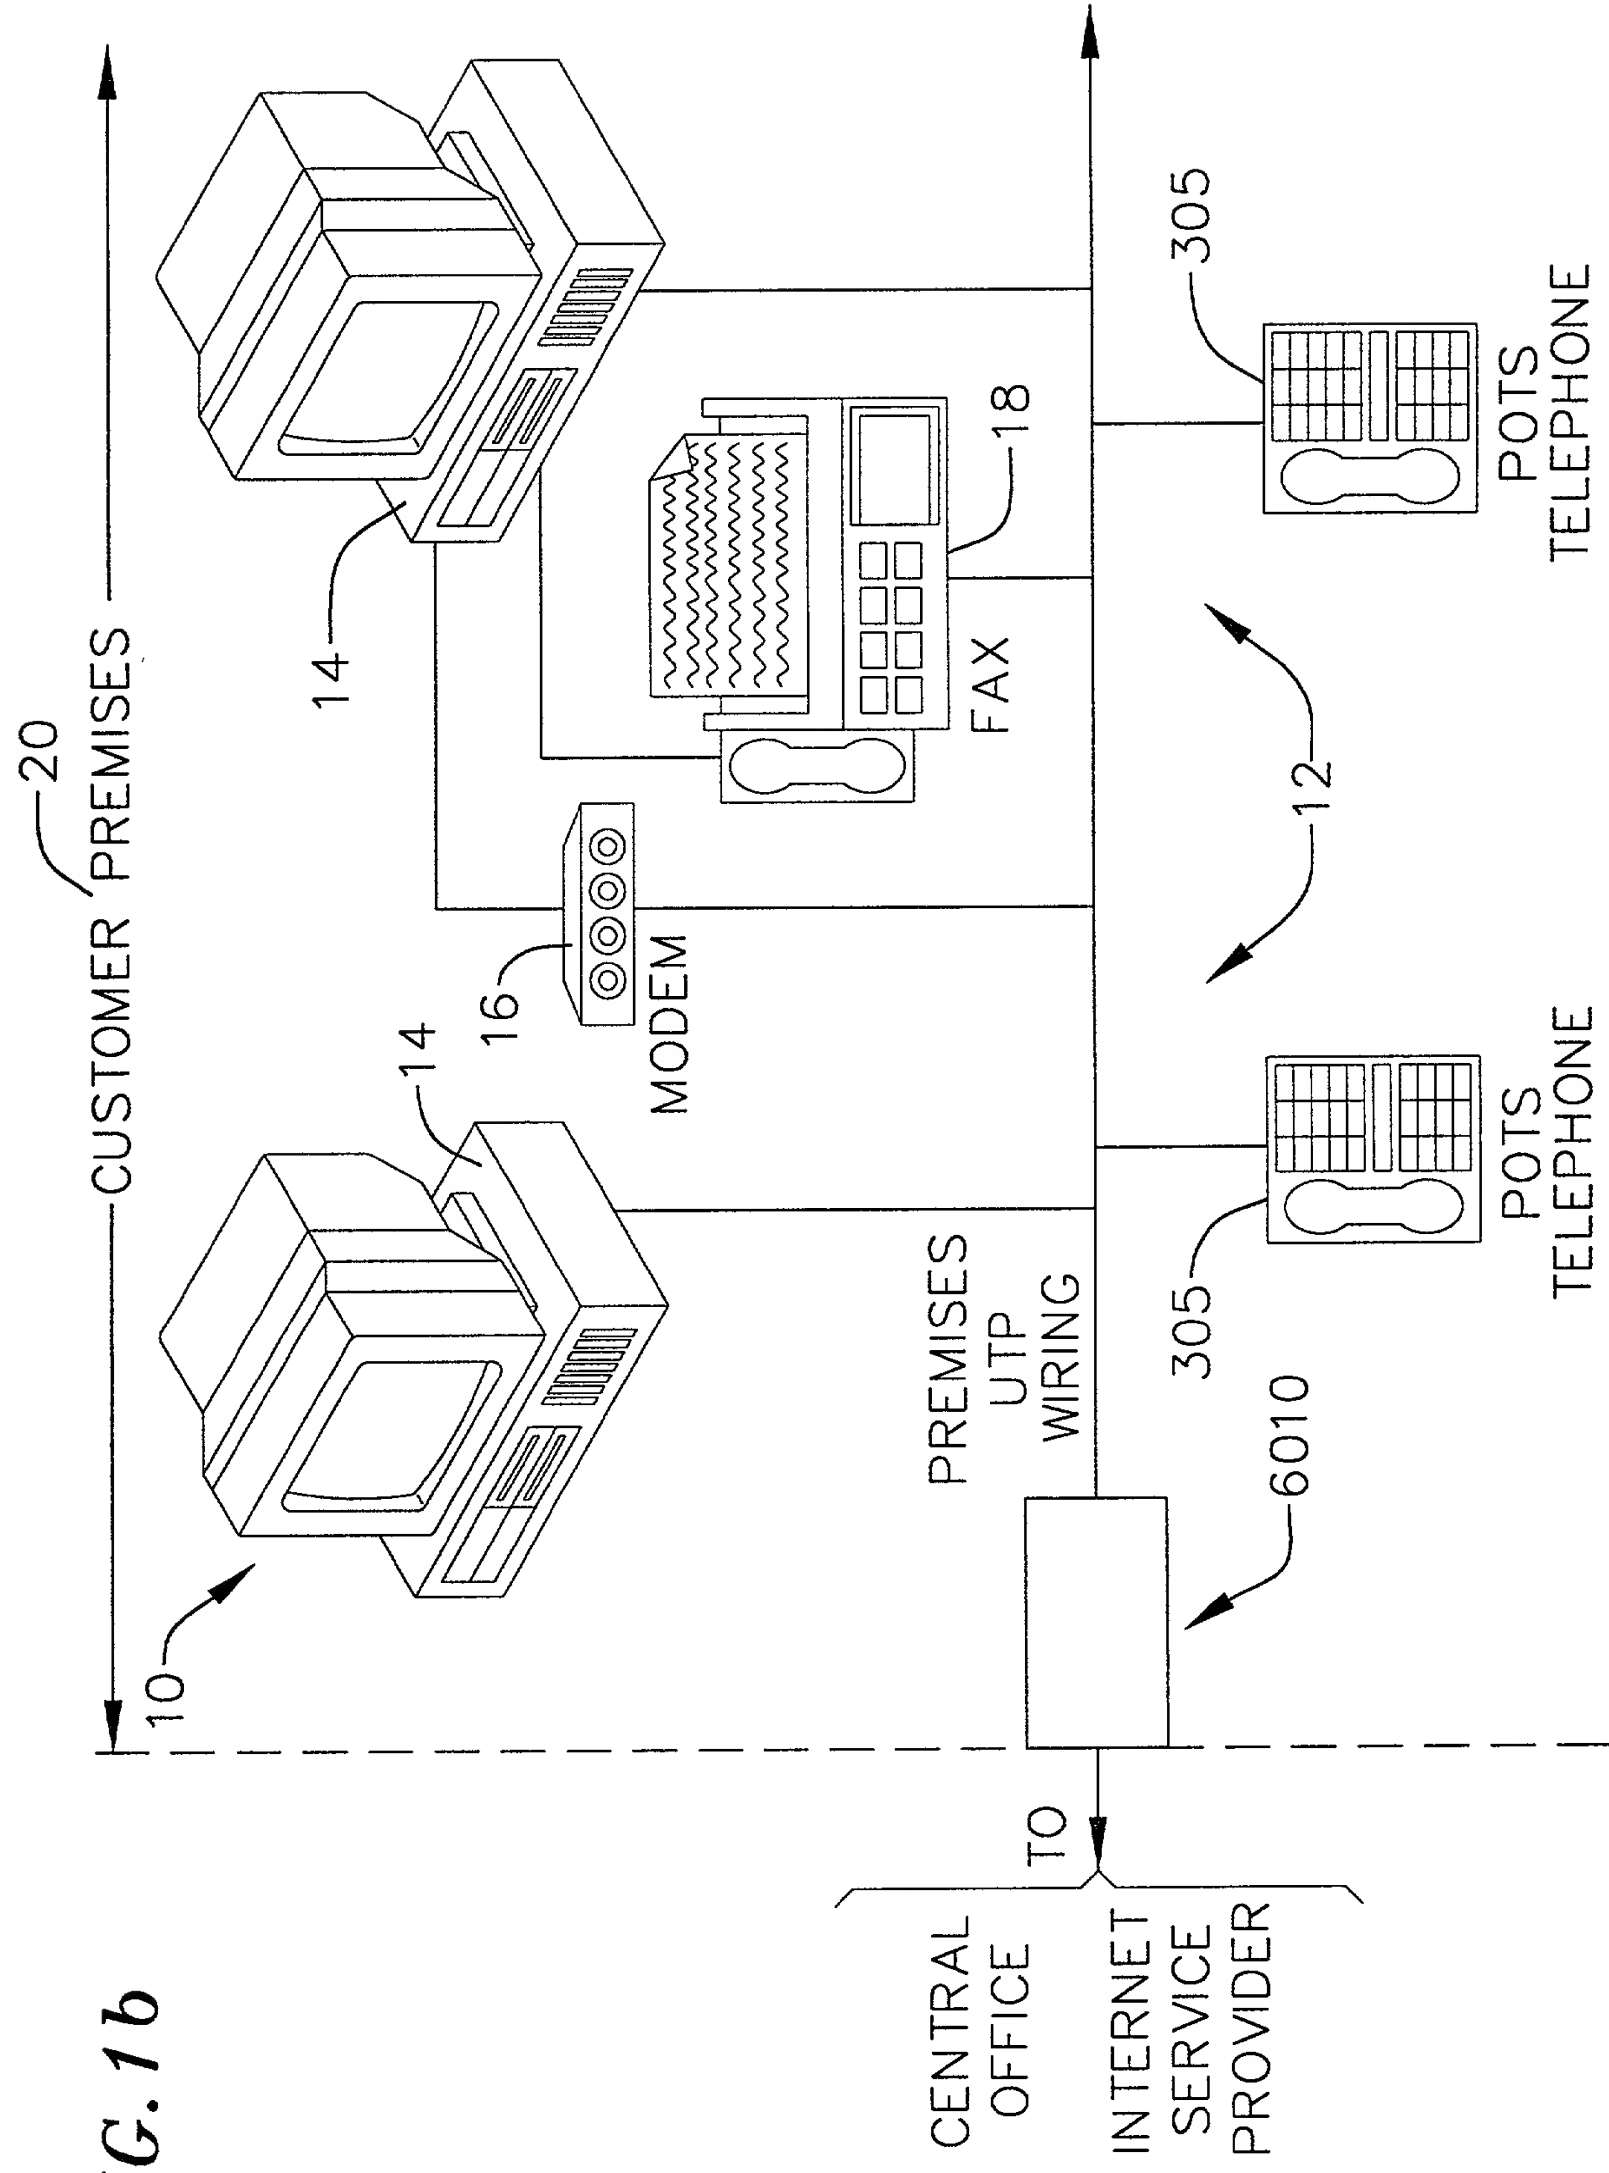
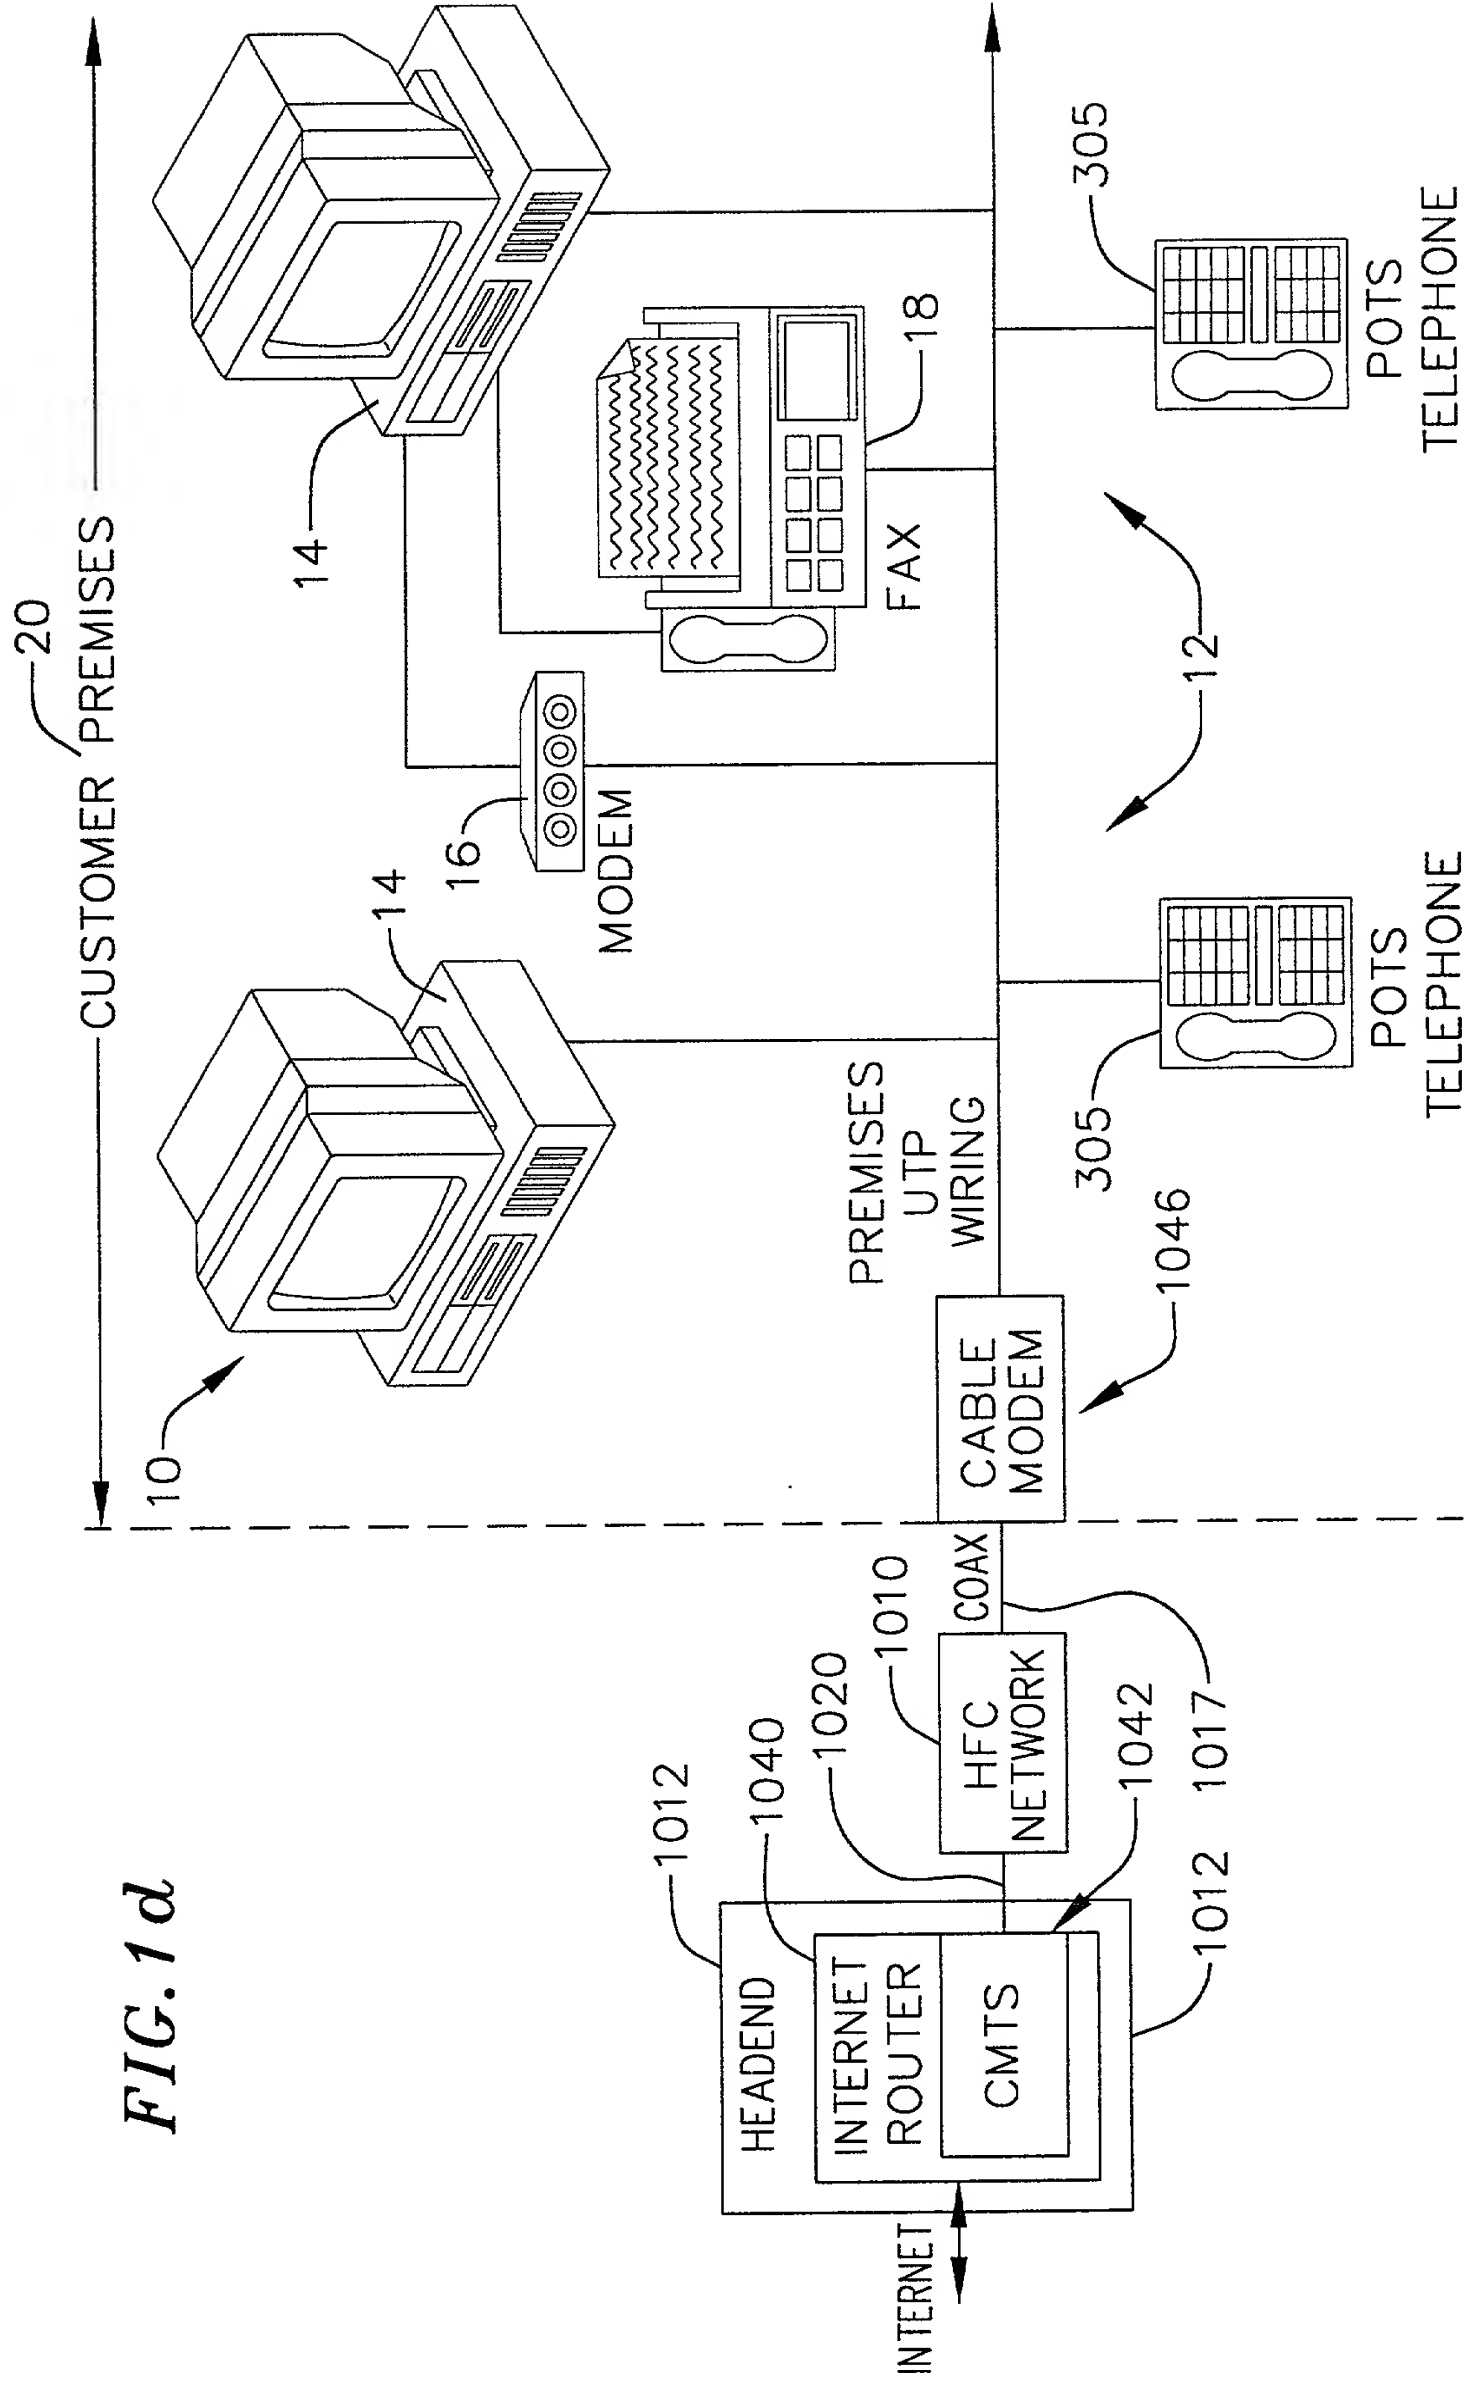


FIG. 1b





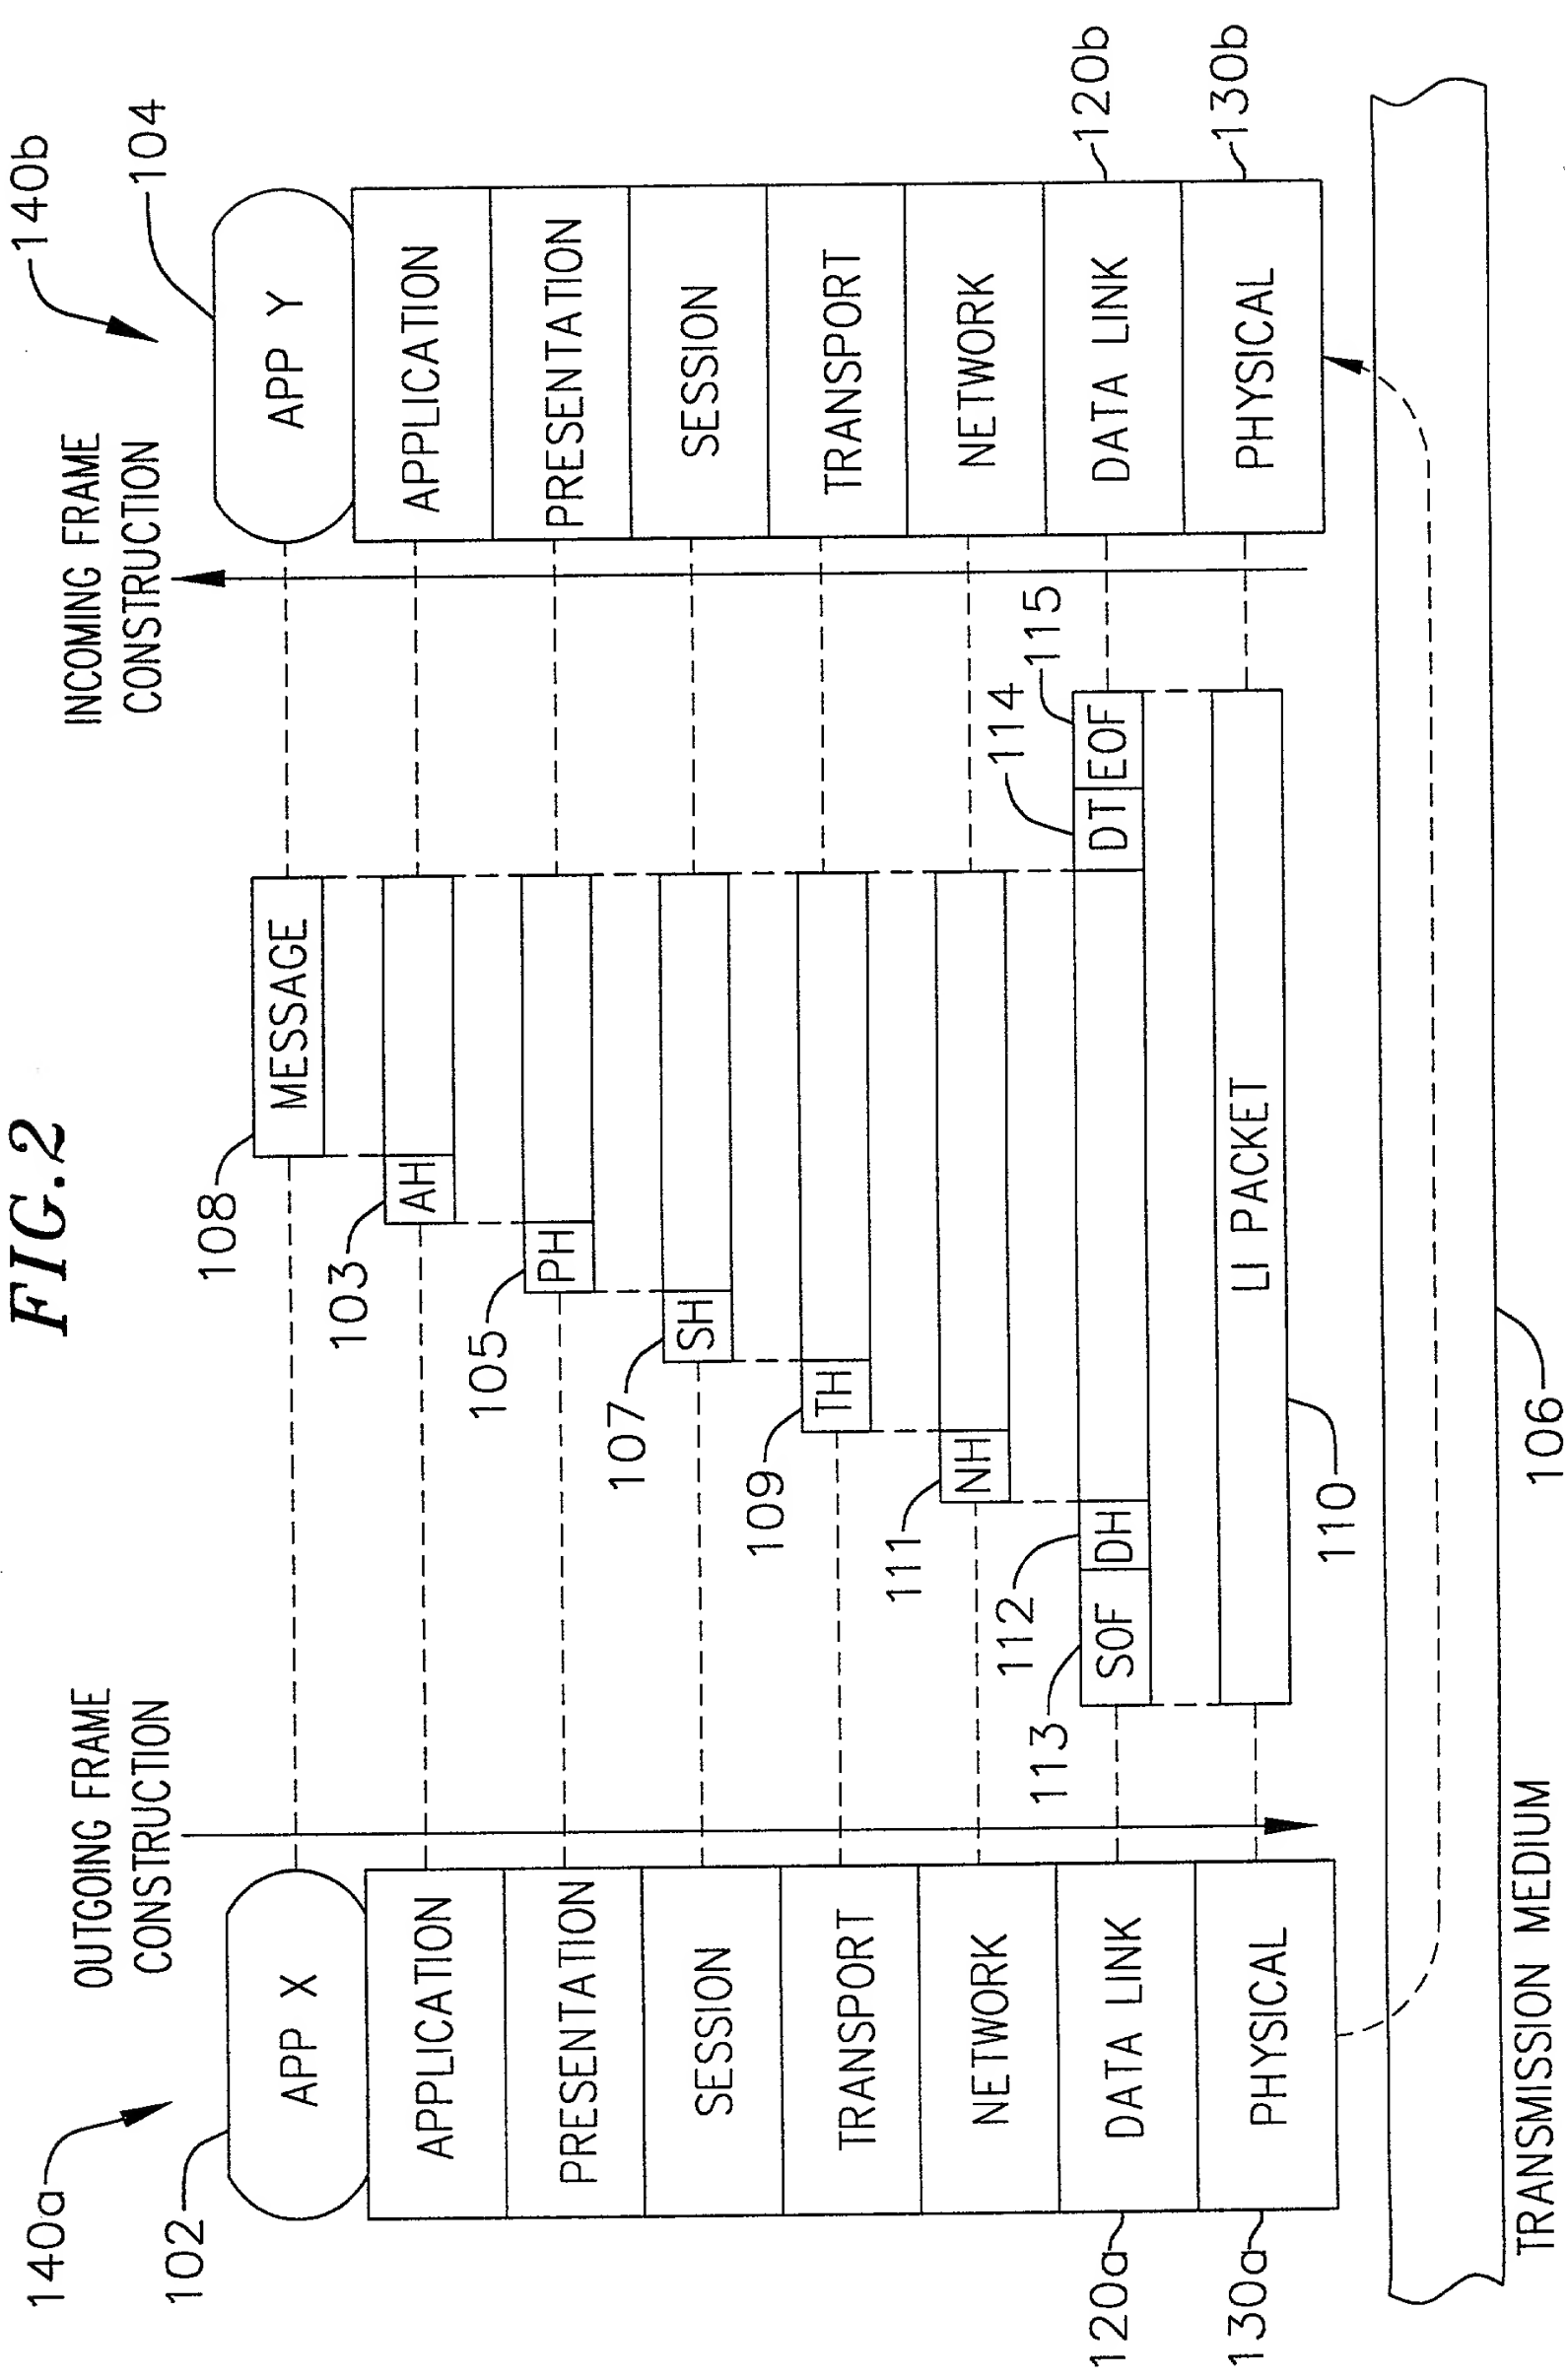


FIG. 3a

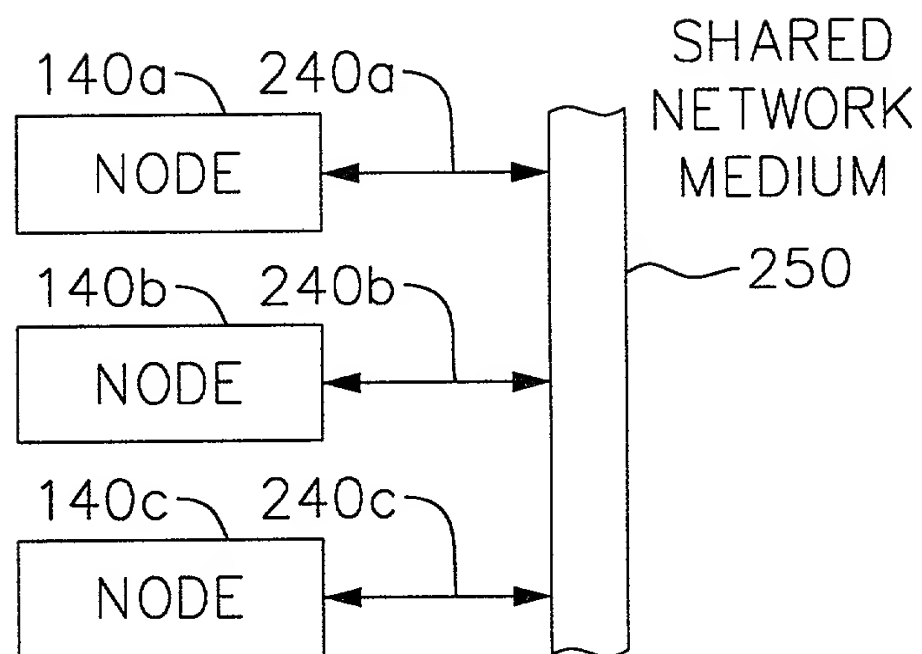


FIG. 3b

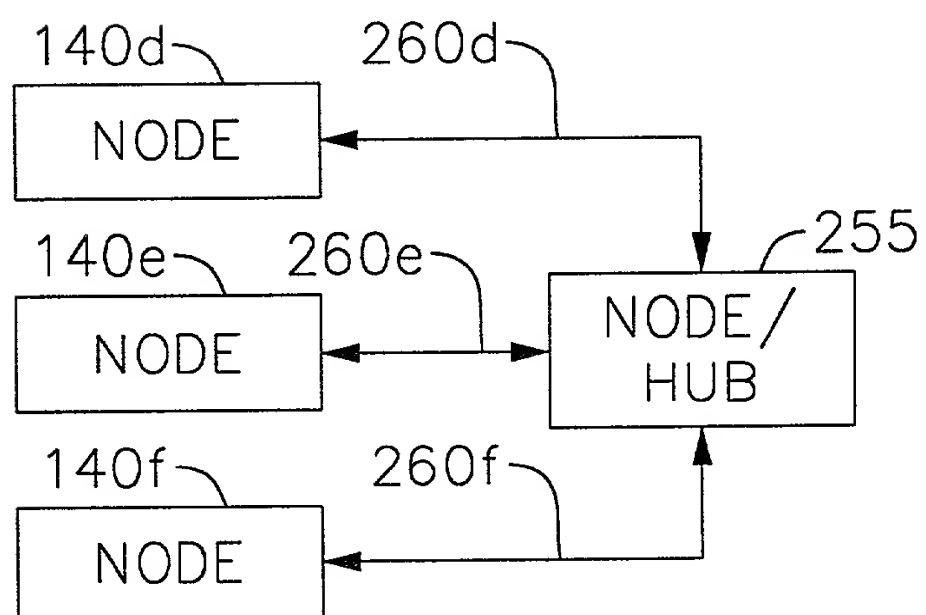
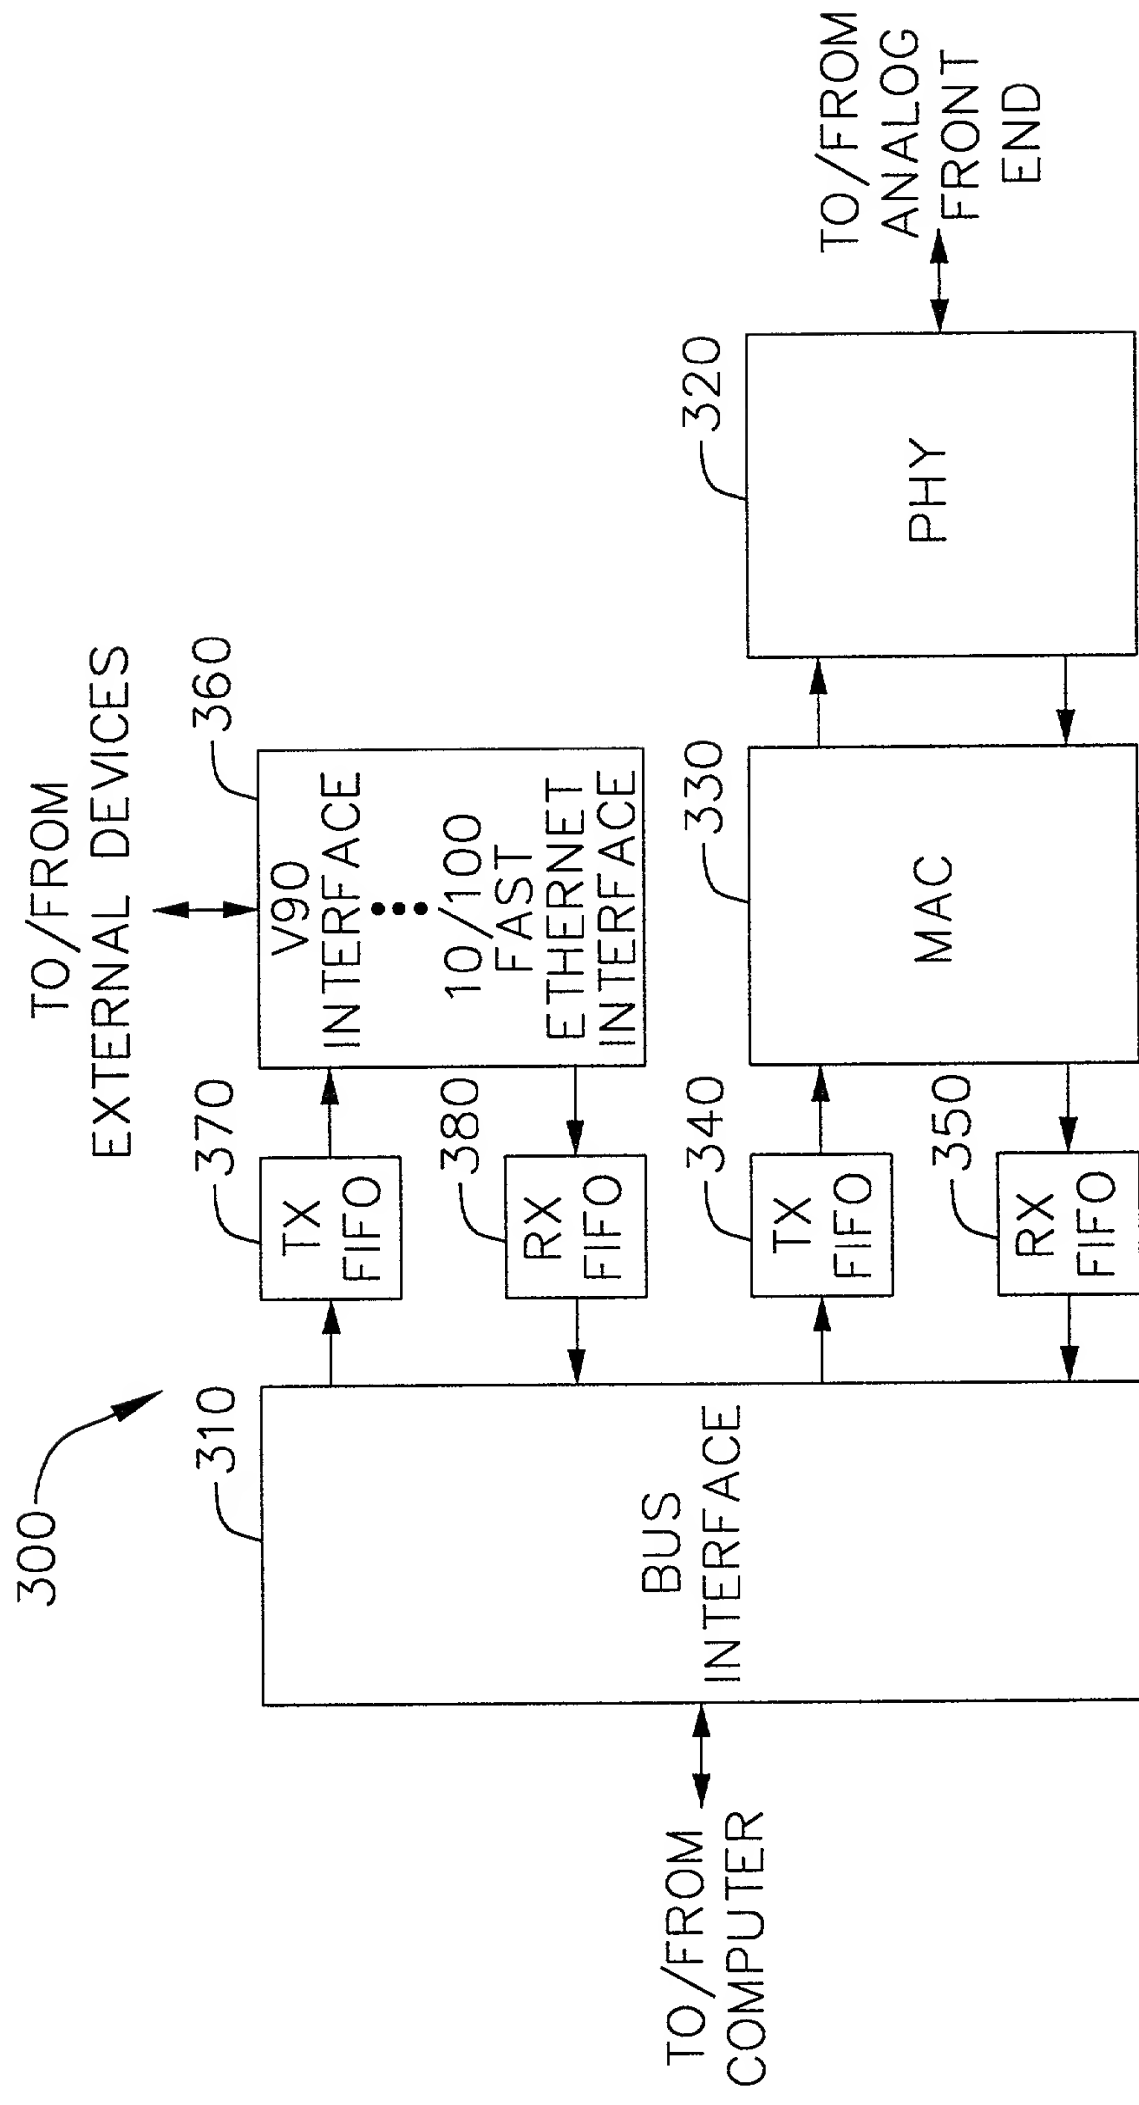


FIG. 4a



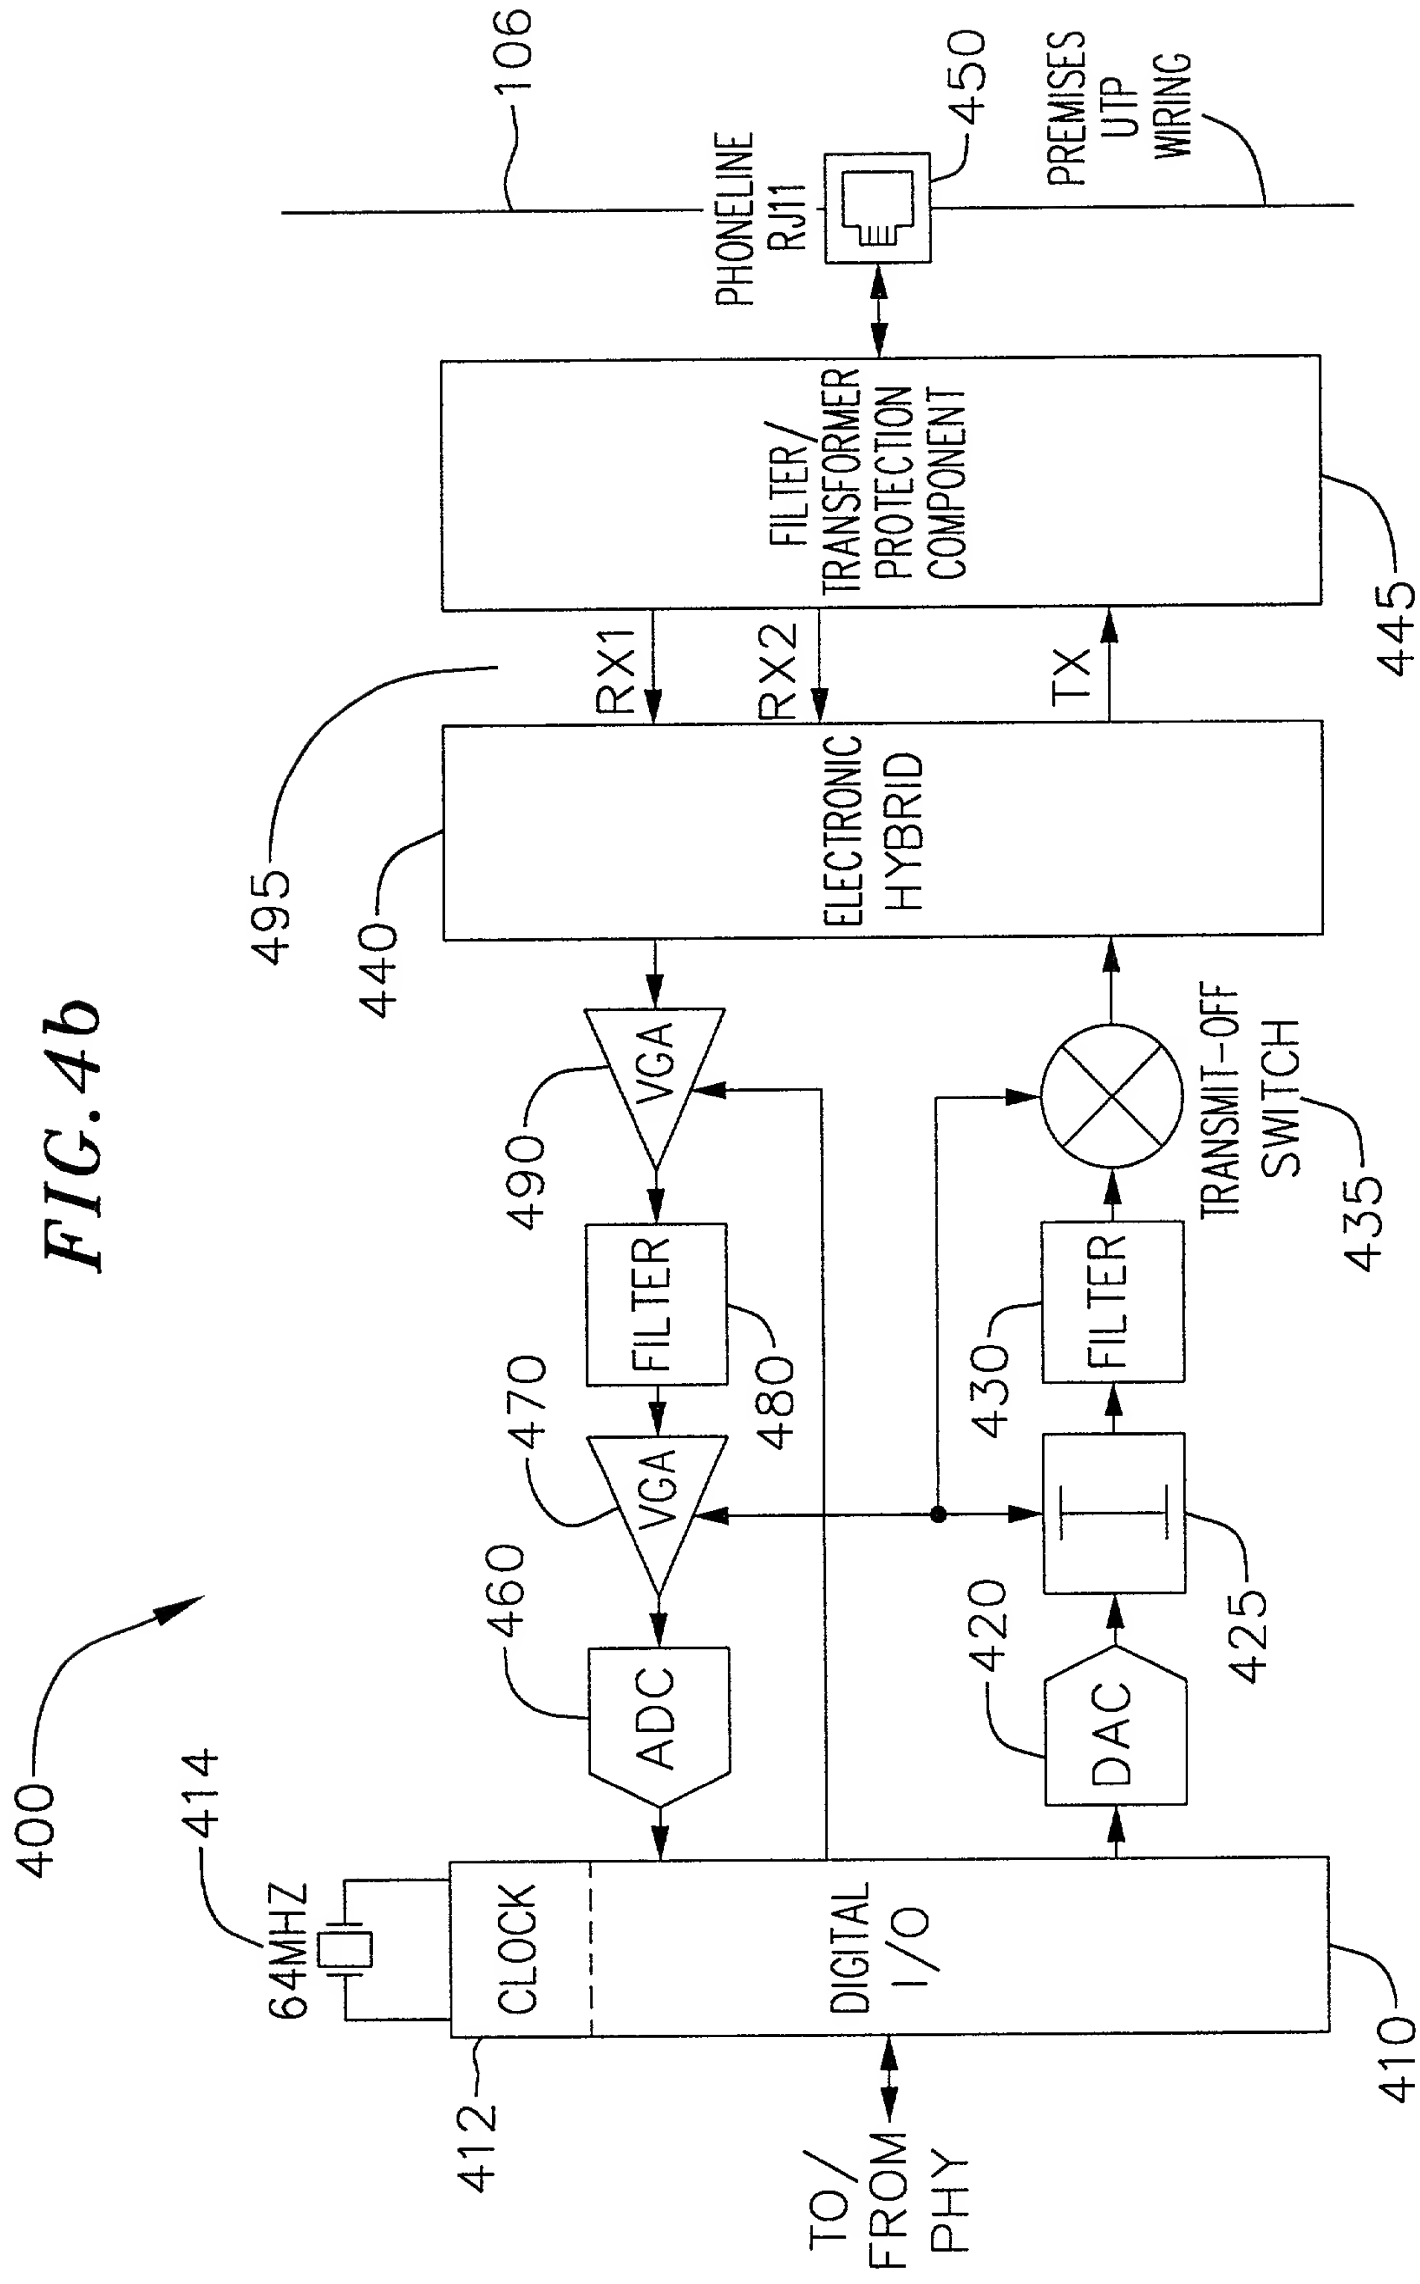


FIG. 5

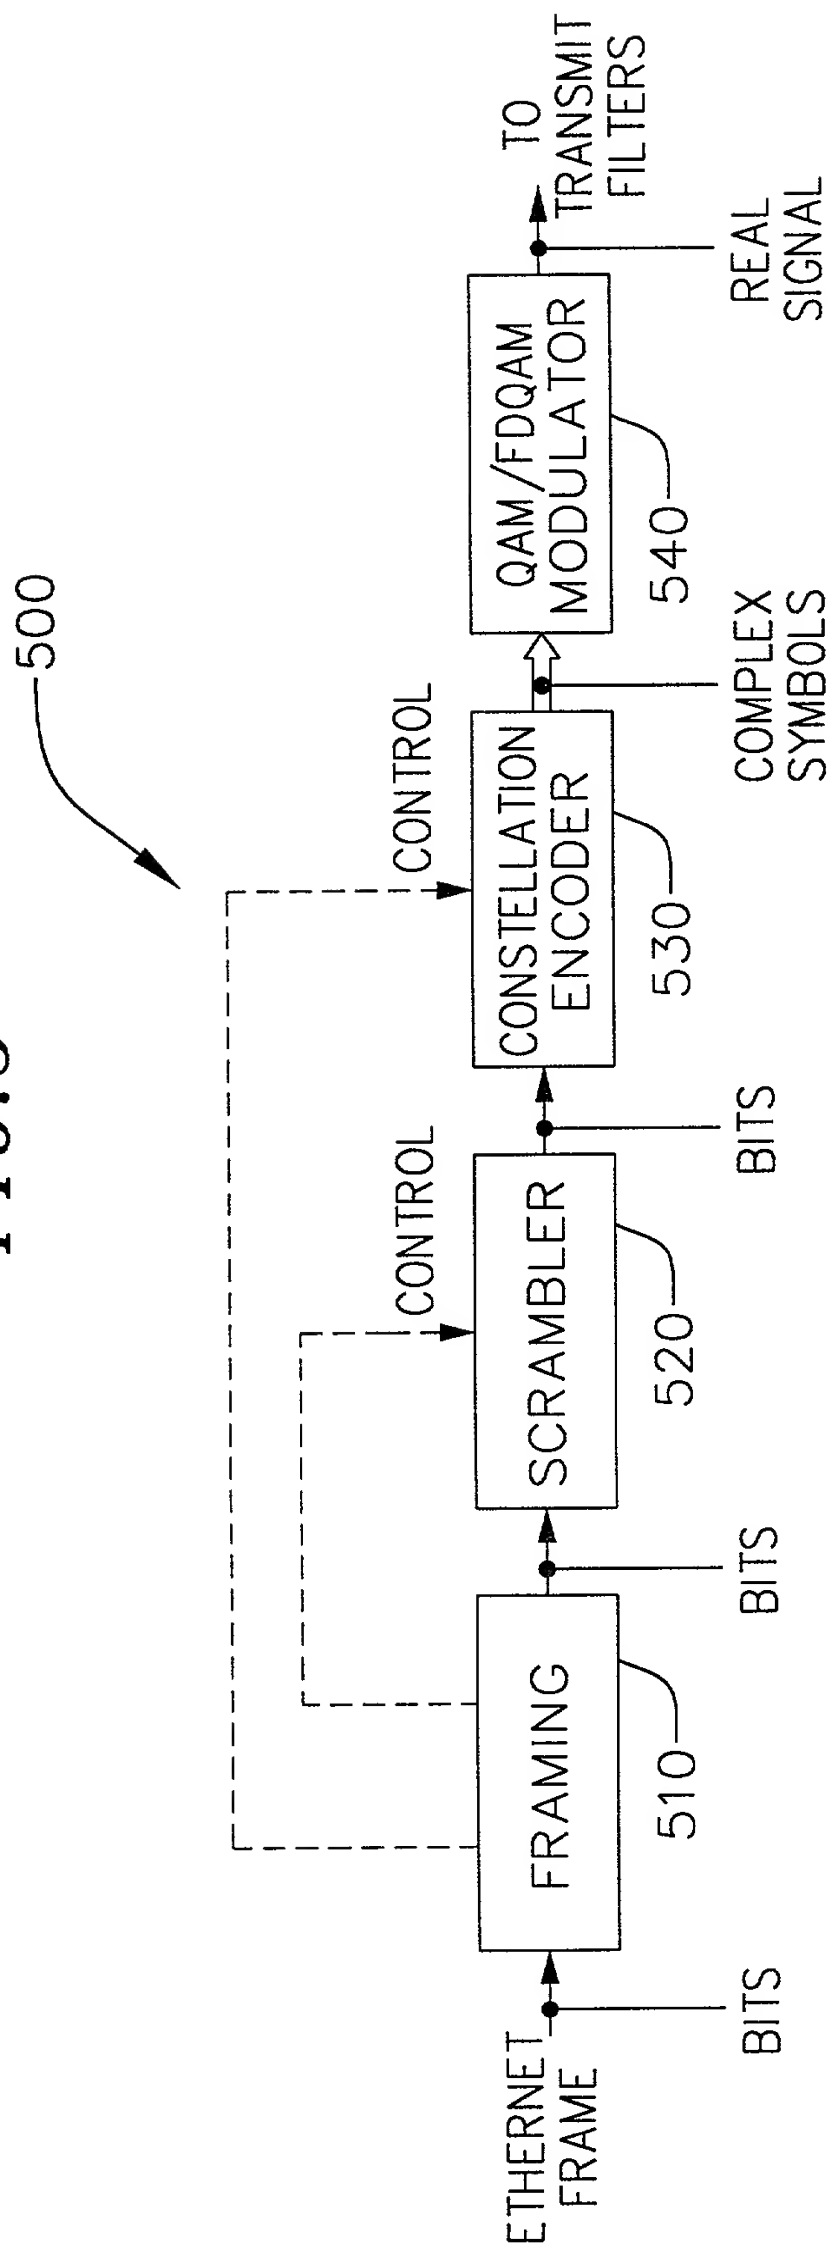


FIG. 6

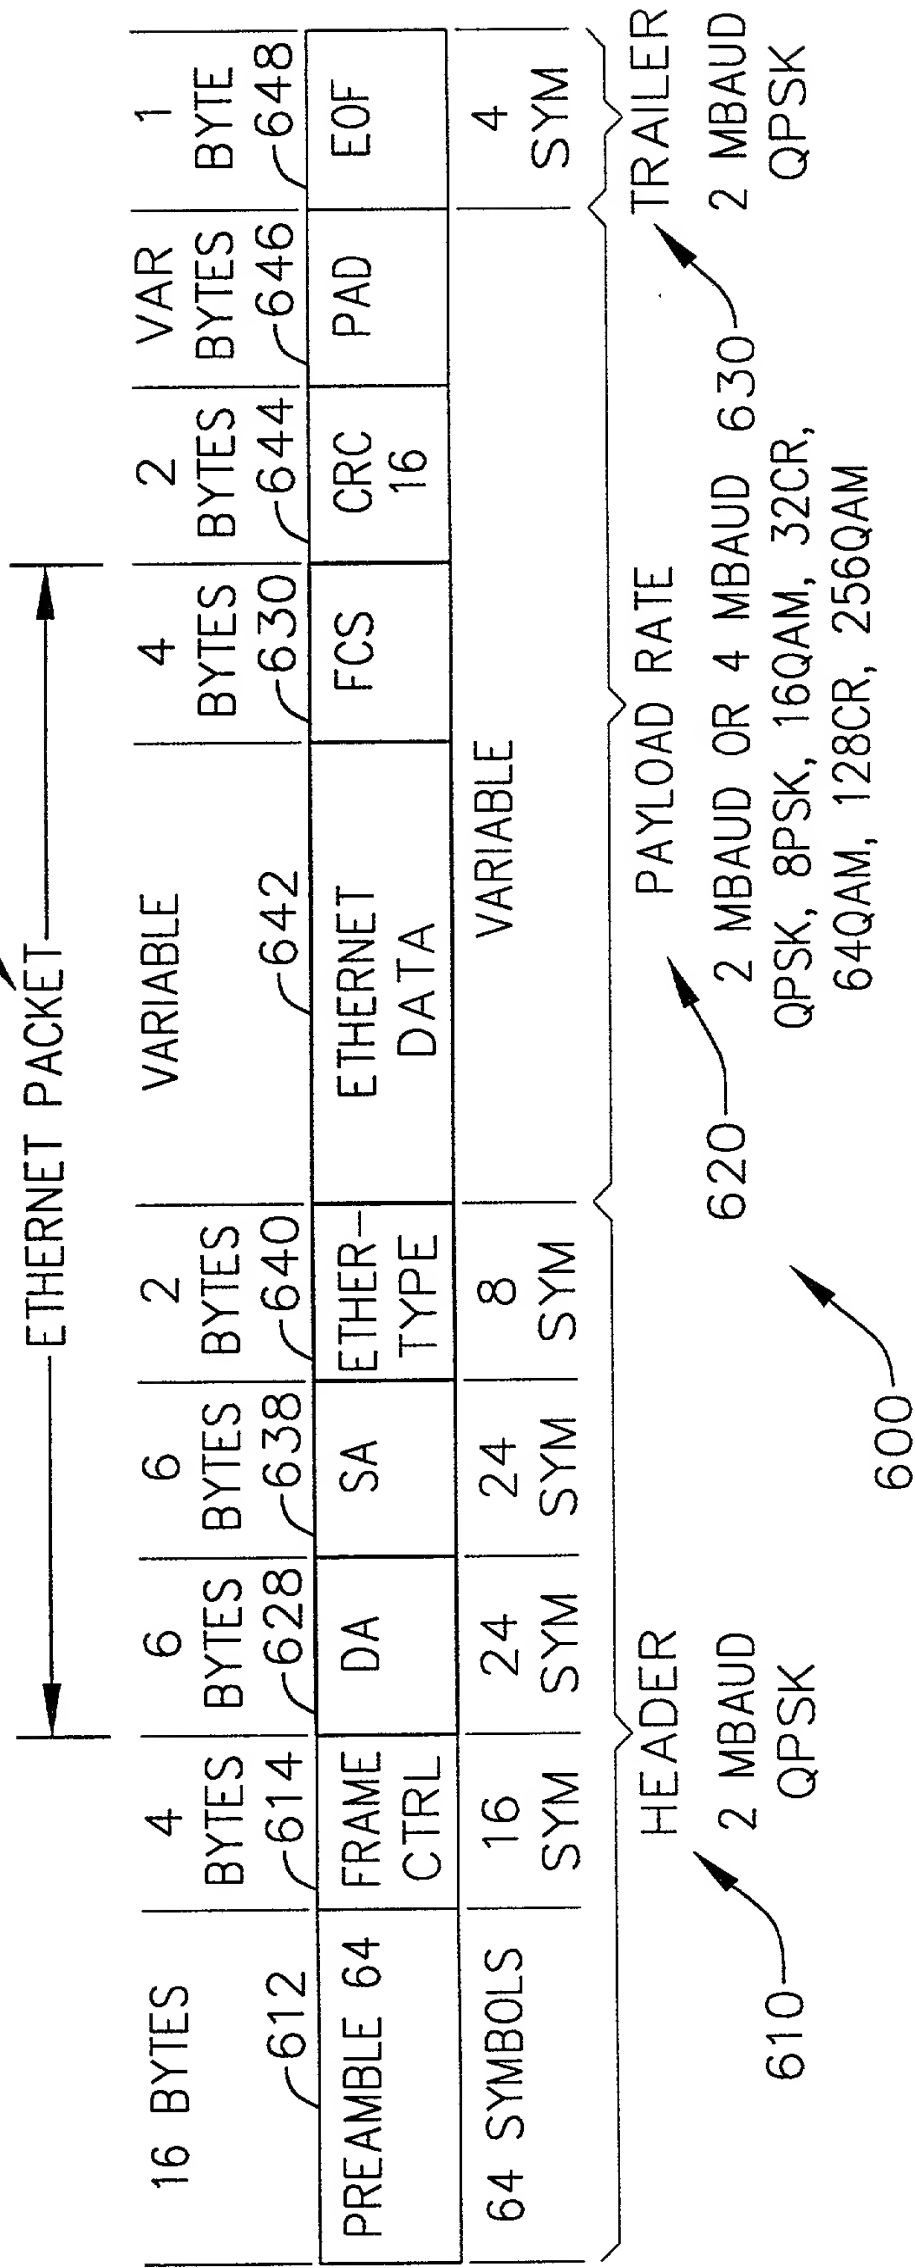


FIG. 8

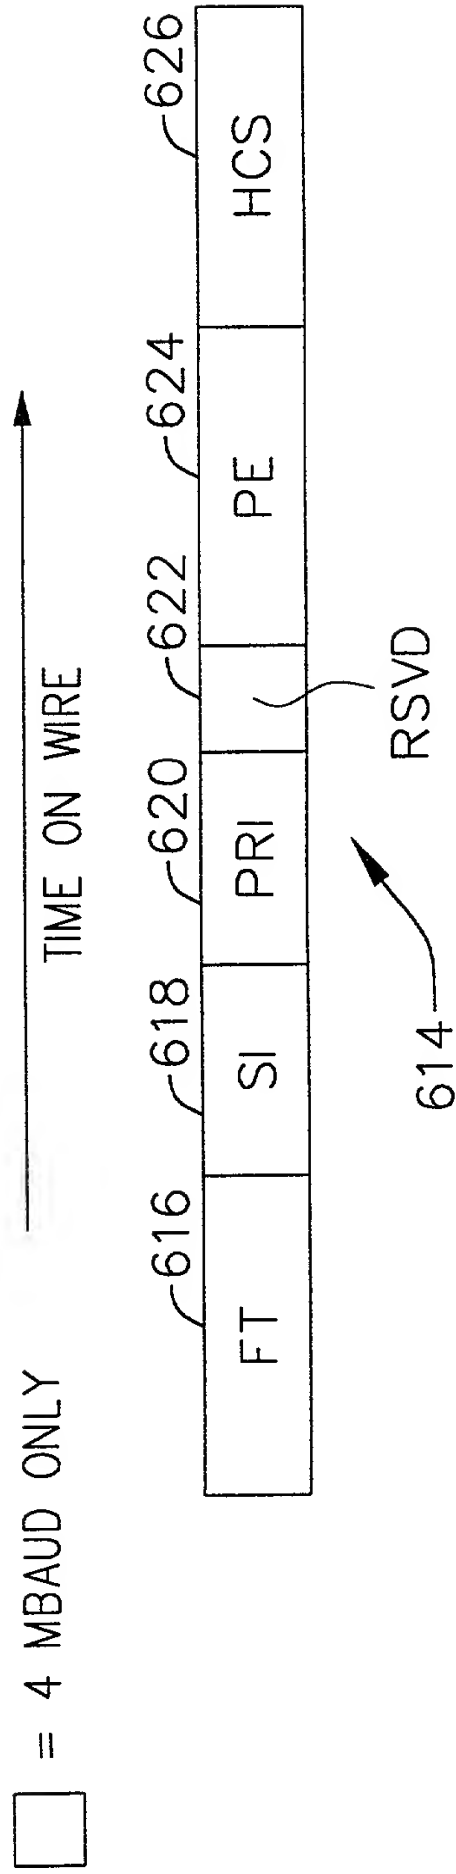


FIG. 7

FIELD	BIT NUMBER	BITS	DESCRIPTION
FT	31:24	8	FRAME TYPE. THIS FIELD SHALL BE SET TO ZERO BY THE TRANSMITTER. THE RECEIVER SHALL DECODE THIS FIELD AND DISCARD THE FRAME IF IT'S ANYTHING OTHER THAN ZERO.
RSVD	23	1	RESERVED. THIS FIELD SHALL BE SET TO ZERO BY THE TRANSMITTER, AND THE RECEIVER SHALL IGNORE IT.
PRI	22:20	3	PRIORITY (0-7)
SI	19:16	4	SCRAMBLER INITIALIZATION
PE	15:8	8	PAYLOAD ENCODING
HCS	7:0	8	HEADER CHECK SEQUENCE

FIG. 9

VALUE	INTERPRETATION
0	RESERVED ON TRANSMIT, DISCARD FRAME ON RECEIVE
1	BAUD RATE=2 MHZ, 2 BITS PER BAUD
2	BAUD RATE=2 MHZ, 3 BITS PER BAUD
3	BAUD RATE=2 MHZ, 4 BITS PER BAUD
4	BAUD RATE=2 MHZ, 5 BITS PER BAUD
5	BAUD RATE=2 MHZ, 6 BITS PER BAUD
6	BAUD RATE=2 MHZ, 7 BITS PER BAUD
7	BAUD RATE=2 MHZ, 8 BITS PER BAUD
8	RESERVED ON TRANSMIT, DISCARD FRAME ON RECEIVE
9	BAUD RATE=4 MHZ, 2 BITS PER BAUD
10	BAUD RATE=4 MHZ, 3 BITS PER BAUD
11	BAUD RATE=4 MHZ, 4 BITS PER BAUD
12	BAUD RATE=4 MHZ, 5 BITS PER BAUD
13	BAUD RATE=4 MHZ, 6 BITS PER BAUD
14	BAUD RATE=4 MHZ, 7 BITS PER BAUD
15	BAUD RATE=4 MHZ, 8 BITS PER BAUD
16-256	RESERVED ON TRANSMIT, DISCARD FRAME ON RECEIVE

FIG. 10

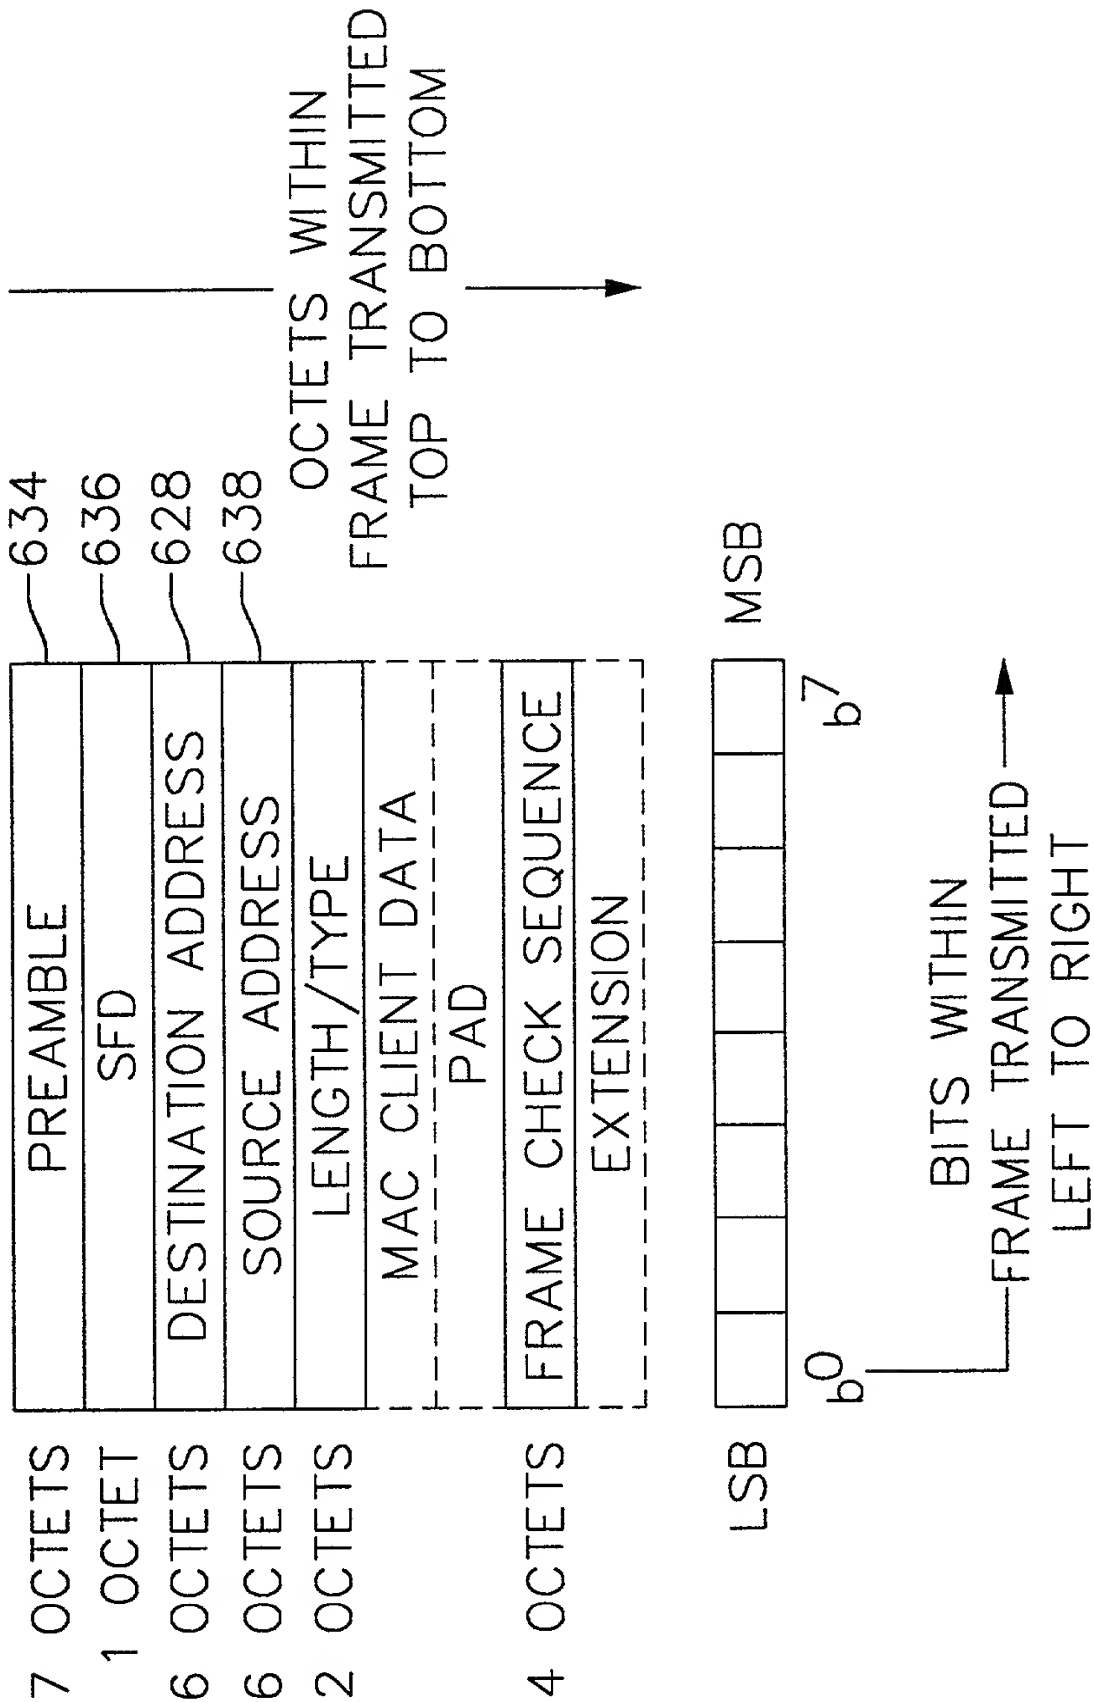


FIG. 11

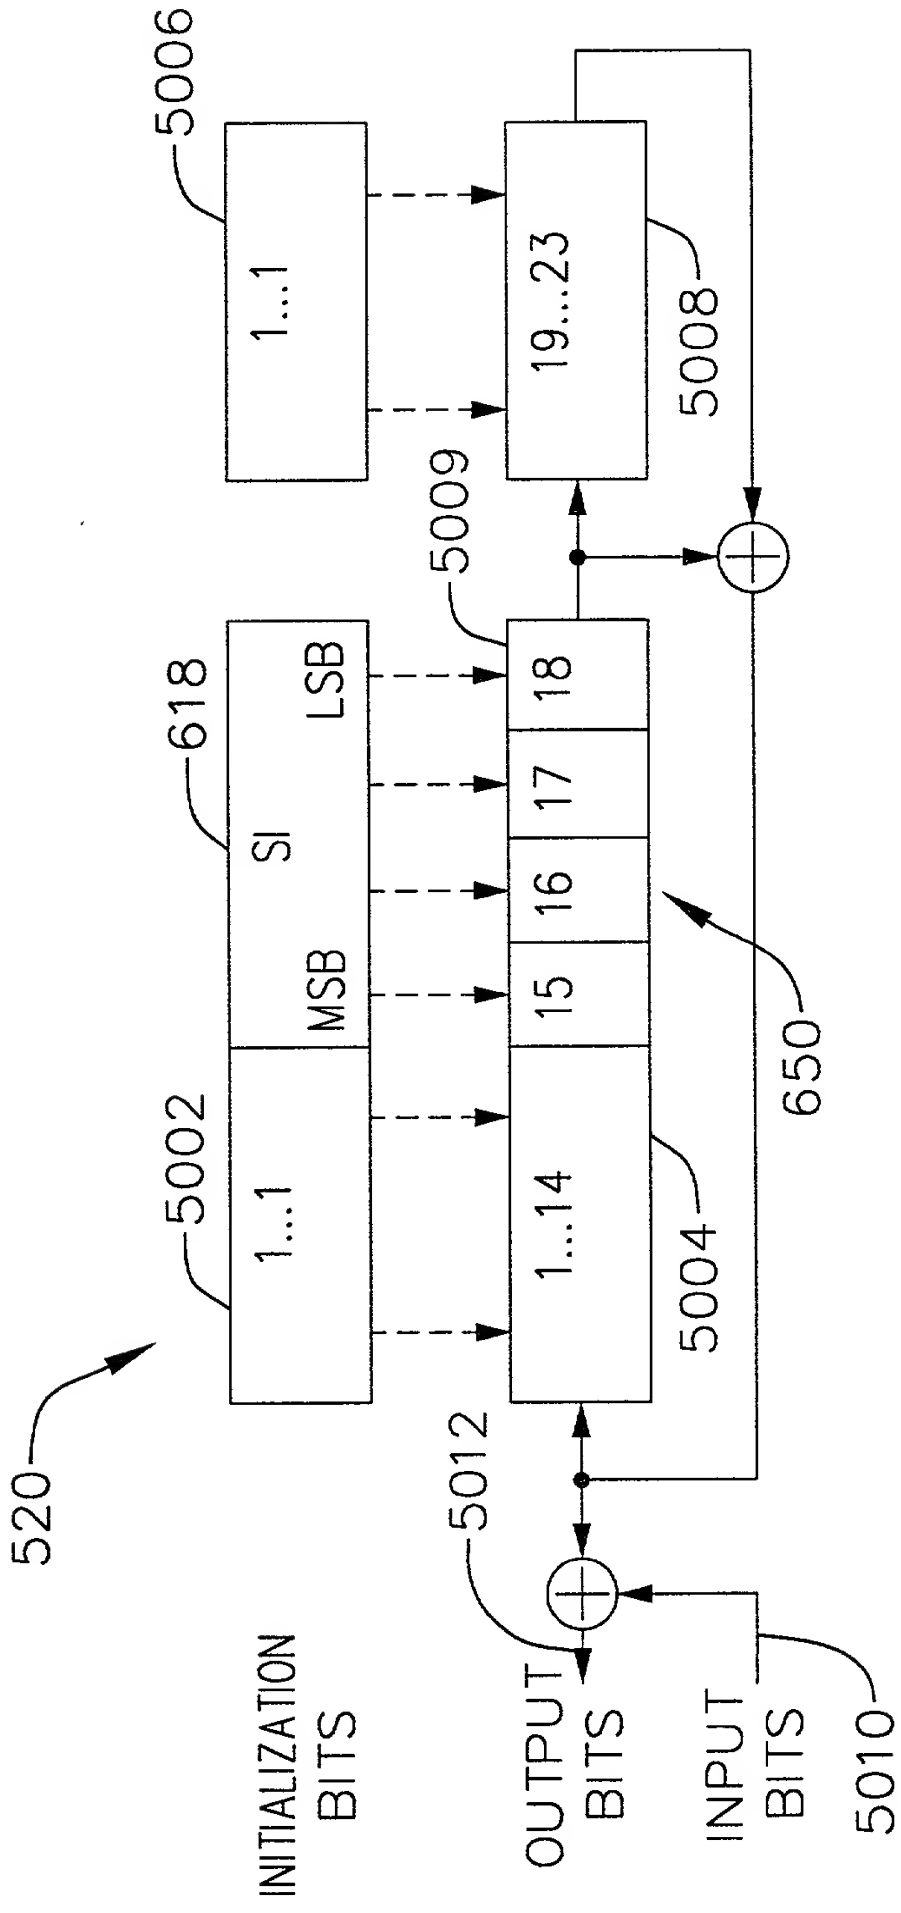


FIG. 12a
2 BITS PER BAUD




FIG. 12b
3 BITS PER BAUD

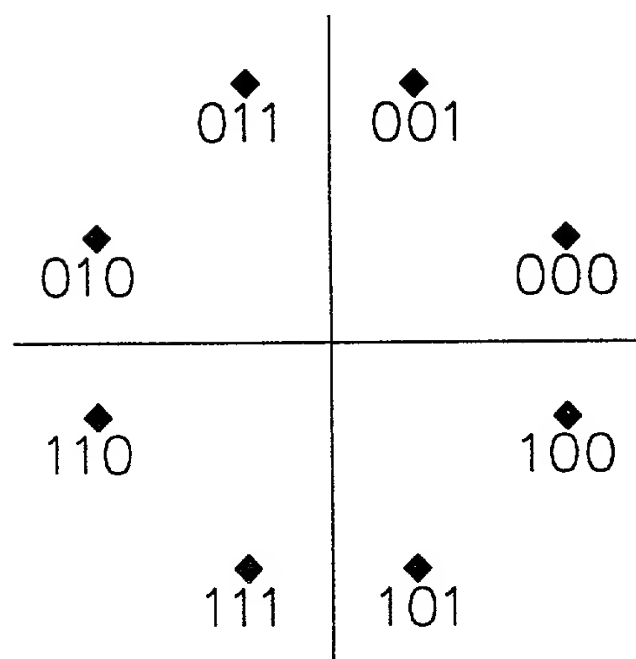


FIG. 12c
4 BITS PER BAUD

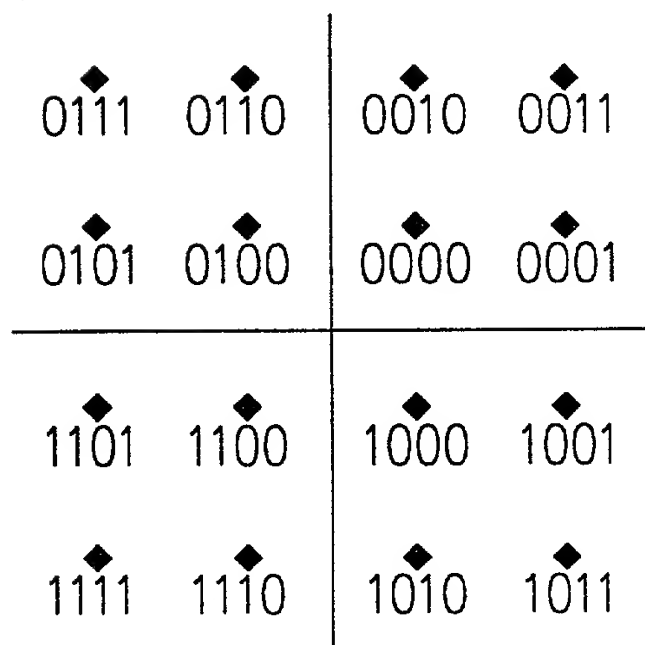


FIG. 12d
5 BITS PER BAUD

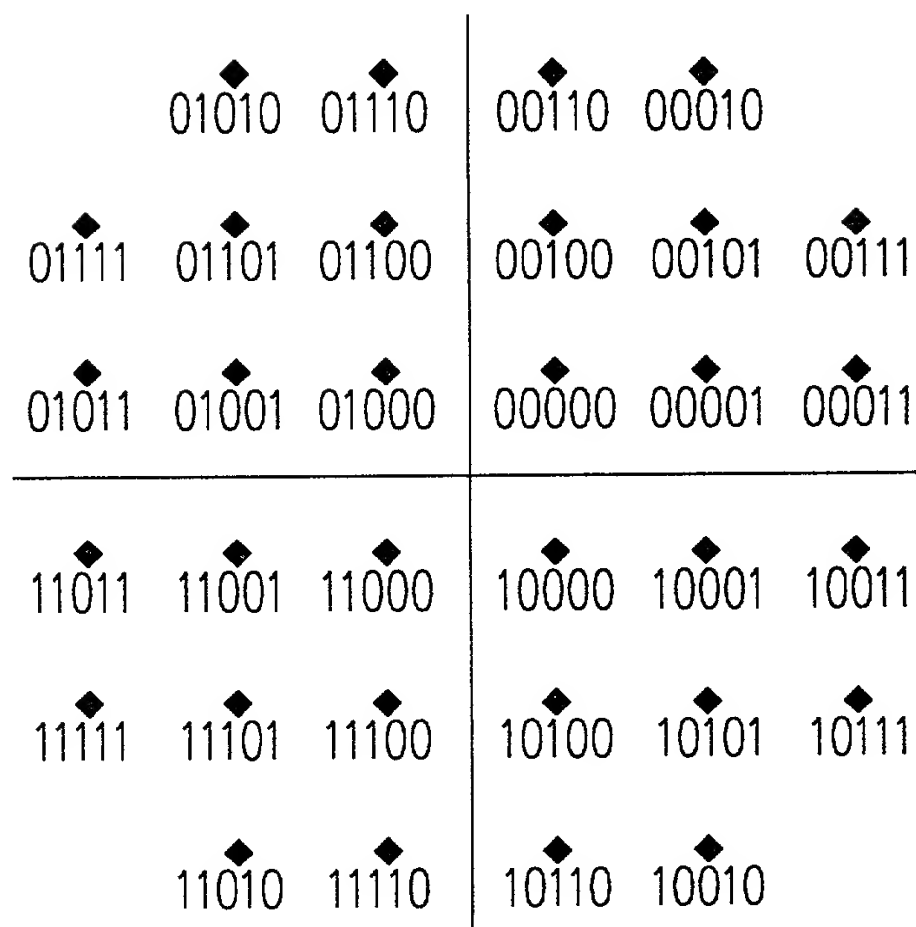


FIG. 12e

6 BITS PER BAUD

011010	011011	011001	011000	001000	001001	001011	001010
011110	011111	011101	011100	001100	001101	001111	001110
010110	010111	010101	010100	000100	000101	000111	000110
010010	010011	010001	010000	000000	000001	000011	000010
110010	110011	110001	110000	100000	100001	100011	100010
110110	110111	110101	110100	100100	100101	100111	100110
111110	111111	111101	111100	101100	101101	101111	101110
111010	111011	111001	111000	101000	101001	101011	101010

FIG. 12f

7 BITS PER BAUD

0101100	0101101	0111101	0111100	0101100	0011101	0001101	0001100
0100100	0100101	0110101	0110100	0101010	0010101	0000101	0000100
0110111	0110110	0110011	0110001	0110010	0010011	0010010	0010111
0111111	0111101	0111011	0111001	0111000	0011011	0011010	0011111
0101111	0101010	0101011	0101001	0101000	0001001	0001010	0001111
0100111	0100010	0100011	0100001	0100000	0000001	0000010	0000111
1100111	1100110	1100011	1100001	1100000	1000001	1000010	1000111
1101111	1101110	1101011	1101001	1101000	1001001	1001010	1001111
1111111	1111101	1111011	1111001	1111000	1011001	1011010	1011111
1110111	1110110	1110011	1110001	1110000	1010001	1010010	1010111
1100100	1100101	1110101	1110101	1110100	1010101	1000101	1000100
1101100	1101101	1111101	1111101	1111100	1011101	1001101	1001100

FIG. 12g

8 BITS PER BAUD

01100100	01100101	01100111	01100110	01100010	01100011	01100001	01100000	00100001	00100011	00100010	00100111	00100101	00100100
01101100	01101101	01101111	01101110	01101010	01101011	01101001	01101000	00101001	00101011	00101010	00101111	00101101	00101100
01111100	01111101	01111111	01111110	01111010	01111011	01111001	01111000	00111001	00111011	00111010	00111111	00111101	00111100
01110100	01110101	01110111	01110110	01110010	01110011	01110001	01110000	00110001	00110011	00110010	00110111	00110101	00110100
01010100	01010101	01010111	01010110	01010010	01010011	01010001	01010000	00010001	00010011	00010010	00010111	00010101	00010100
01011100	01011101	01011111	01011110	01011010	01011011	01011001	01011000	00011001	00011011	00011010	00011111	00011101	00011100
01001100	01001101	01001111	01001110	01001010	01001011	01001001	01001000	00001001	00001011	00001010	00001111	00001101	00001100
01000100	01000101	01000110	01000111	01000010	01000011	01000001	01000000	00000001	00000011	00000010	00000111	00000101	00000100
11000100	11000101	11000111	11000110	11000010	11000011	11000001	11000000	10000001	10000011	10000010	10000111	10000101	10000100
11001100	11001101	11001111	11001110	11001010	11001011	11001001	11001000	10001001	10001011	10001010	10001111	10001101	10001100
11011100	11011101	11011111	11011110	11011010	11011011	11011001	11011000	10011001	10011011	10011010	10011111	10011101	10011100
11010100	11010101	11010111	11010110	11010010	11010011	11010001	11010000	10010001	10010011	10010010	10010111	10010101	10010100
11110100	11110101	11110111	11110110	11110010	11110011	11110001	11110000	10110001	10110011	10110010	10110111	10110101	10110100
11111100	11111101	11111111	11111110	11111010	11111011	11111001	11111000	10111001	10111011	10111010	10111111	10111101	10111100
11101100	11101101	11101111	11101110	11101010	11101011	11101001	11101000	10101001	10101011	10101010	10101111	10101101	10101100
11100100	11100101	11100111	11100110	11100010	11100011	11100001	11100000	10100001	10100011	10100010	10100111	10100101	10100100

FIG. 13

BITS PER BAUD	REFERENCE POINT(S)	VALUE
2	00	$1+i$
3	000 001	$(12+5i)/9$ $(5+12i)/9$
4	0000	$(1+i)/3$
5	00000	$(1+i)/4$
6	000000	$(1+i)/7$
7	0000000	$(1+i)/9$
8	00000000	$(1+i)/15$

FIG. 14

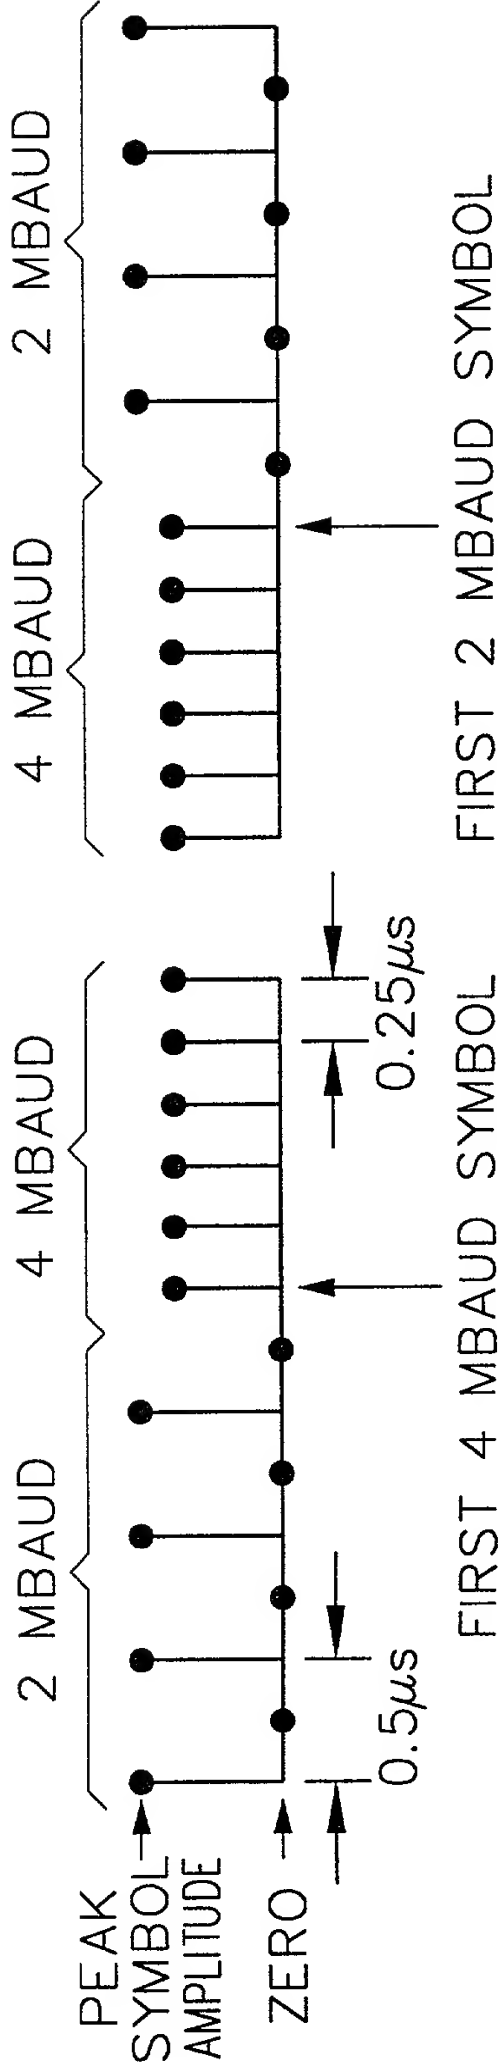
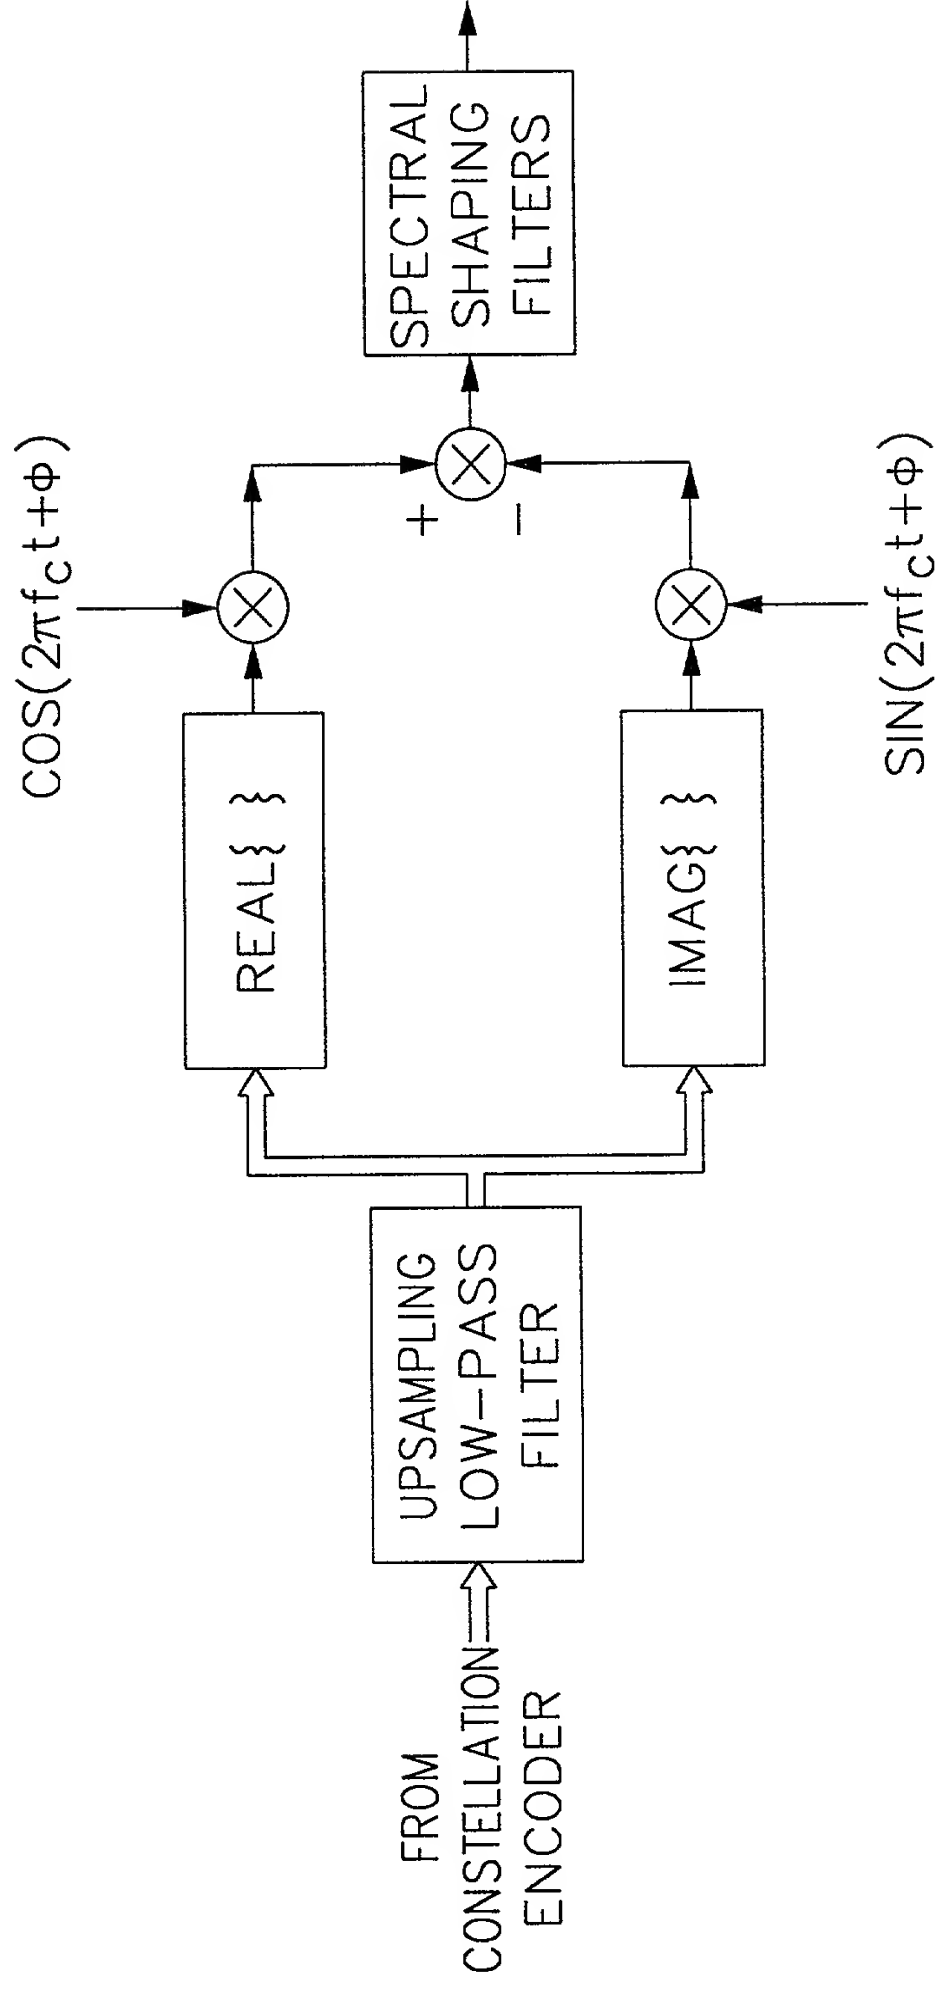


FIG. 15



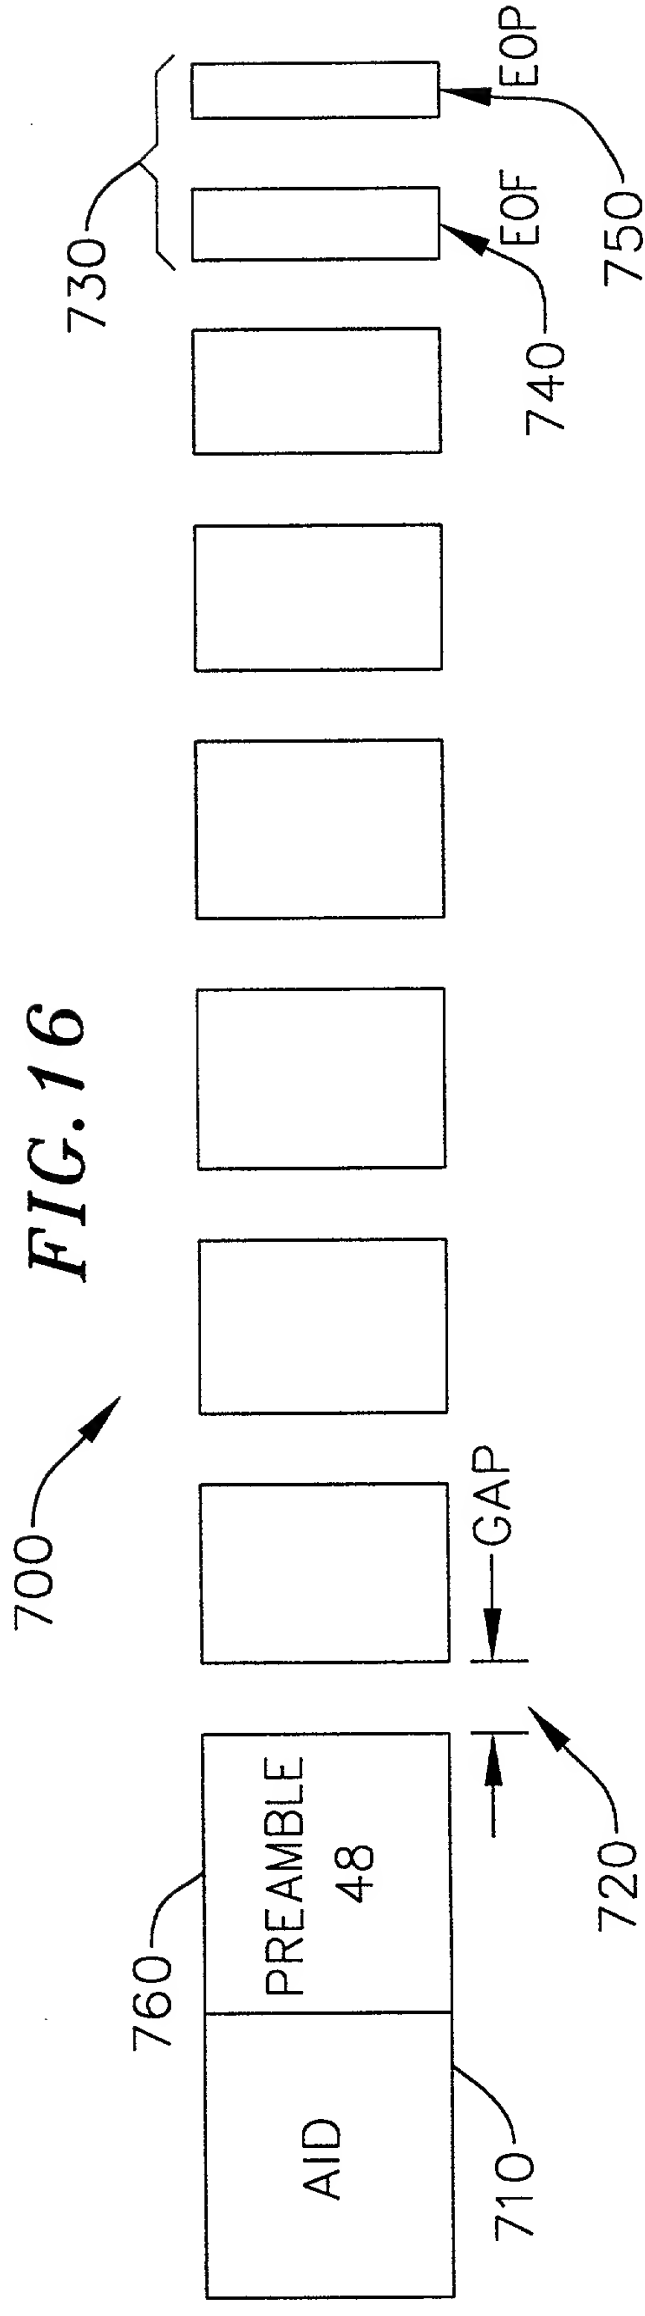


FIG. 17

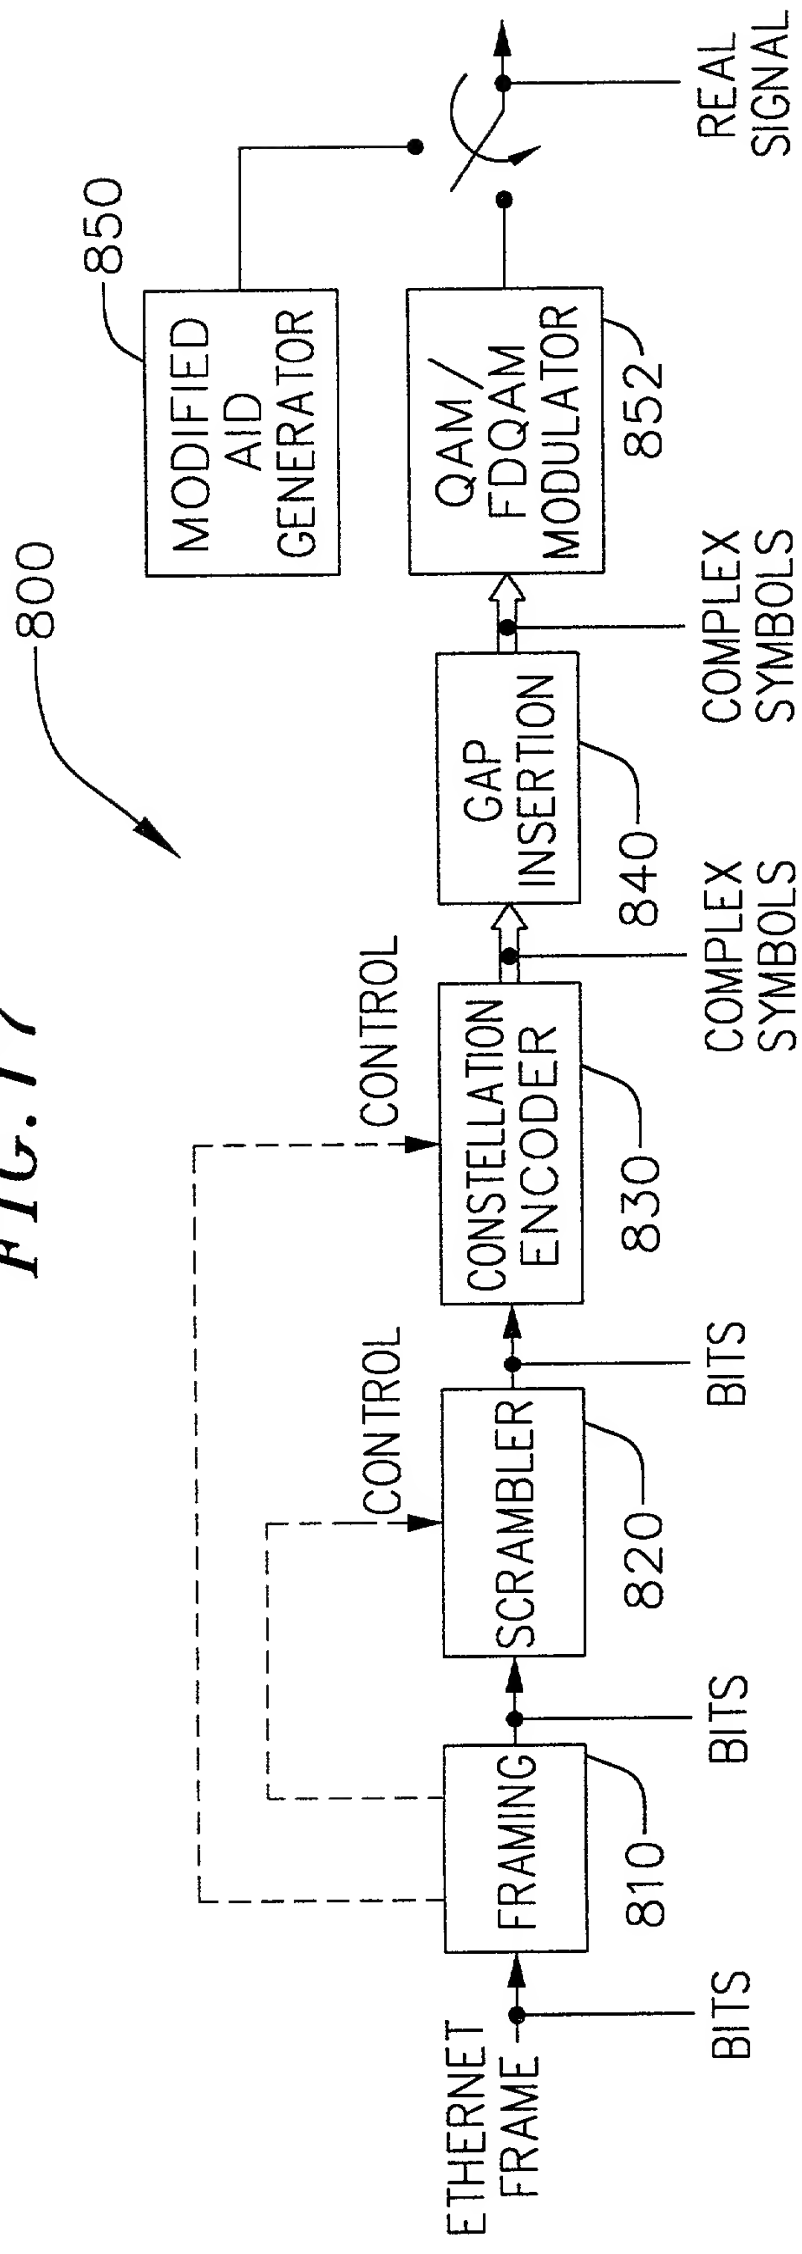


FIG. 18

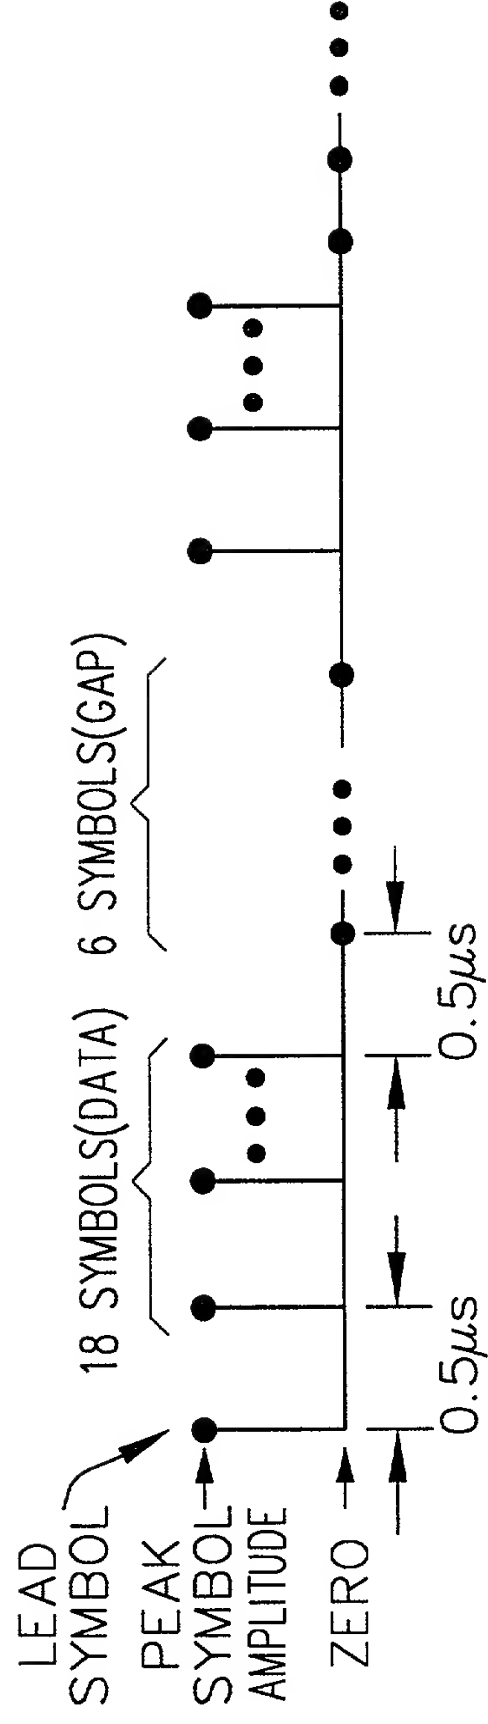


FIG. 19

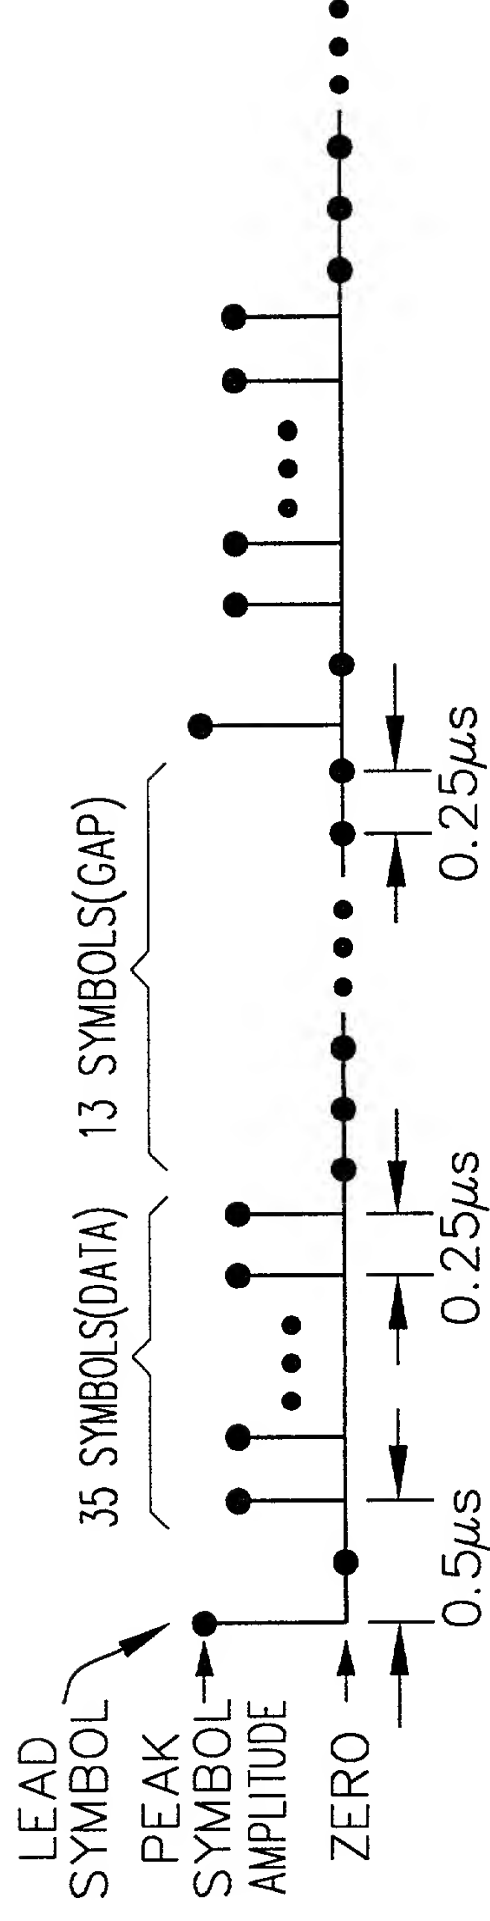


FIG.20

M MODULO 2	P MODULO 2	EOF/EOP SEQUENCE
0	0	<ul style="list-style-type: none">•4 SYMBOLS, DEFINED BY THE BITS 0xfc•12 ZERO SYMBOLS•1 SYMBOL, DEFINED BY THE BITS 00
0	1	<ul style="list-style-type: none">•4 SYMBOLS, DEFINED BY THE BITS 0x03•12 ZERO SYMBOLS•1 SYMBOL, DEFINED BY THE BITS 11
1	0	<ul style="list-style-type: none">•4 SYMBOLS, DEFINED BY THE BITS 0x03•12 ZERO SYMBOLS•1 SYMBOL, DEFINED BY THE BITS 11
1	1	<ul style="list-style-type: none">•4 SYMBOLS, DEFINED BY THE BITS 0xfc•12 ZERO SYMBOLS•1 SYMBOL, DEFINED BY THE BITS 00

FIG. 21

M MODULO 2	P MODULO 4	EOF/EOP SEQUENCE
0	0	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0xfc • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 00
0	1	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0x56 • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 10
0	2	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0x03 • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 11
0	3	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0xa9 • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 01
1	0	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0x03 • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 11
1	1	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0xa9 • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 01
1	2	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0xfc • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 00
1	3	<ul style="list-style-type: none"> • 4 SYMBOLS, DEFINED BY THE BITS 0x56 • 12 ZERO SYMBOLS • 1 SYMBOL, DEFINED BY THE BITS 10

FIG.22

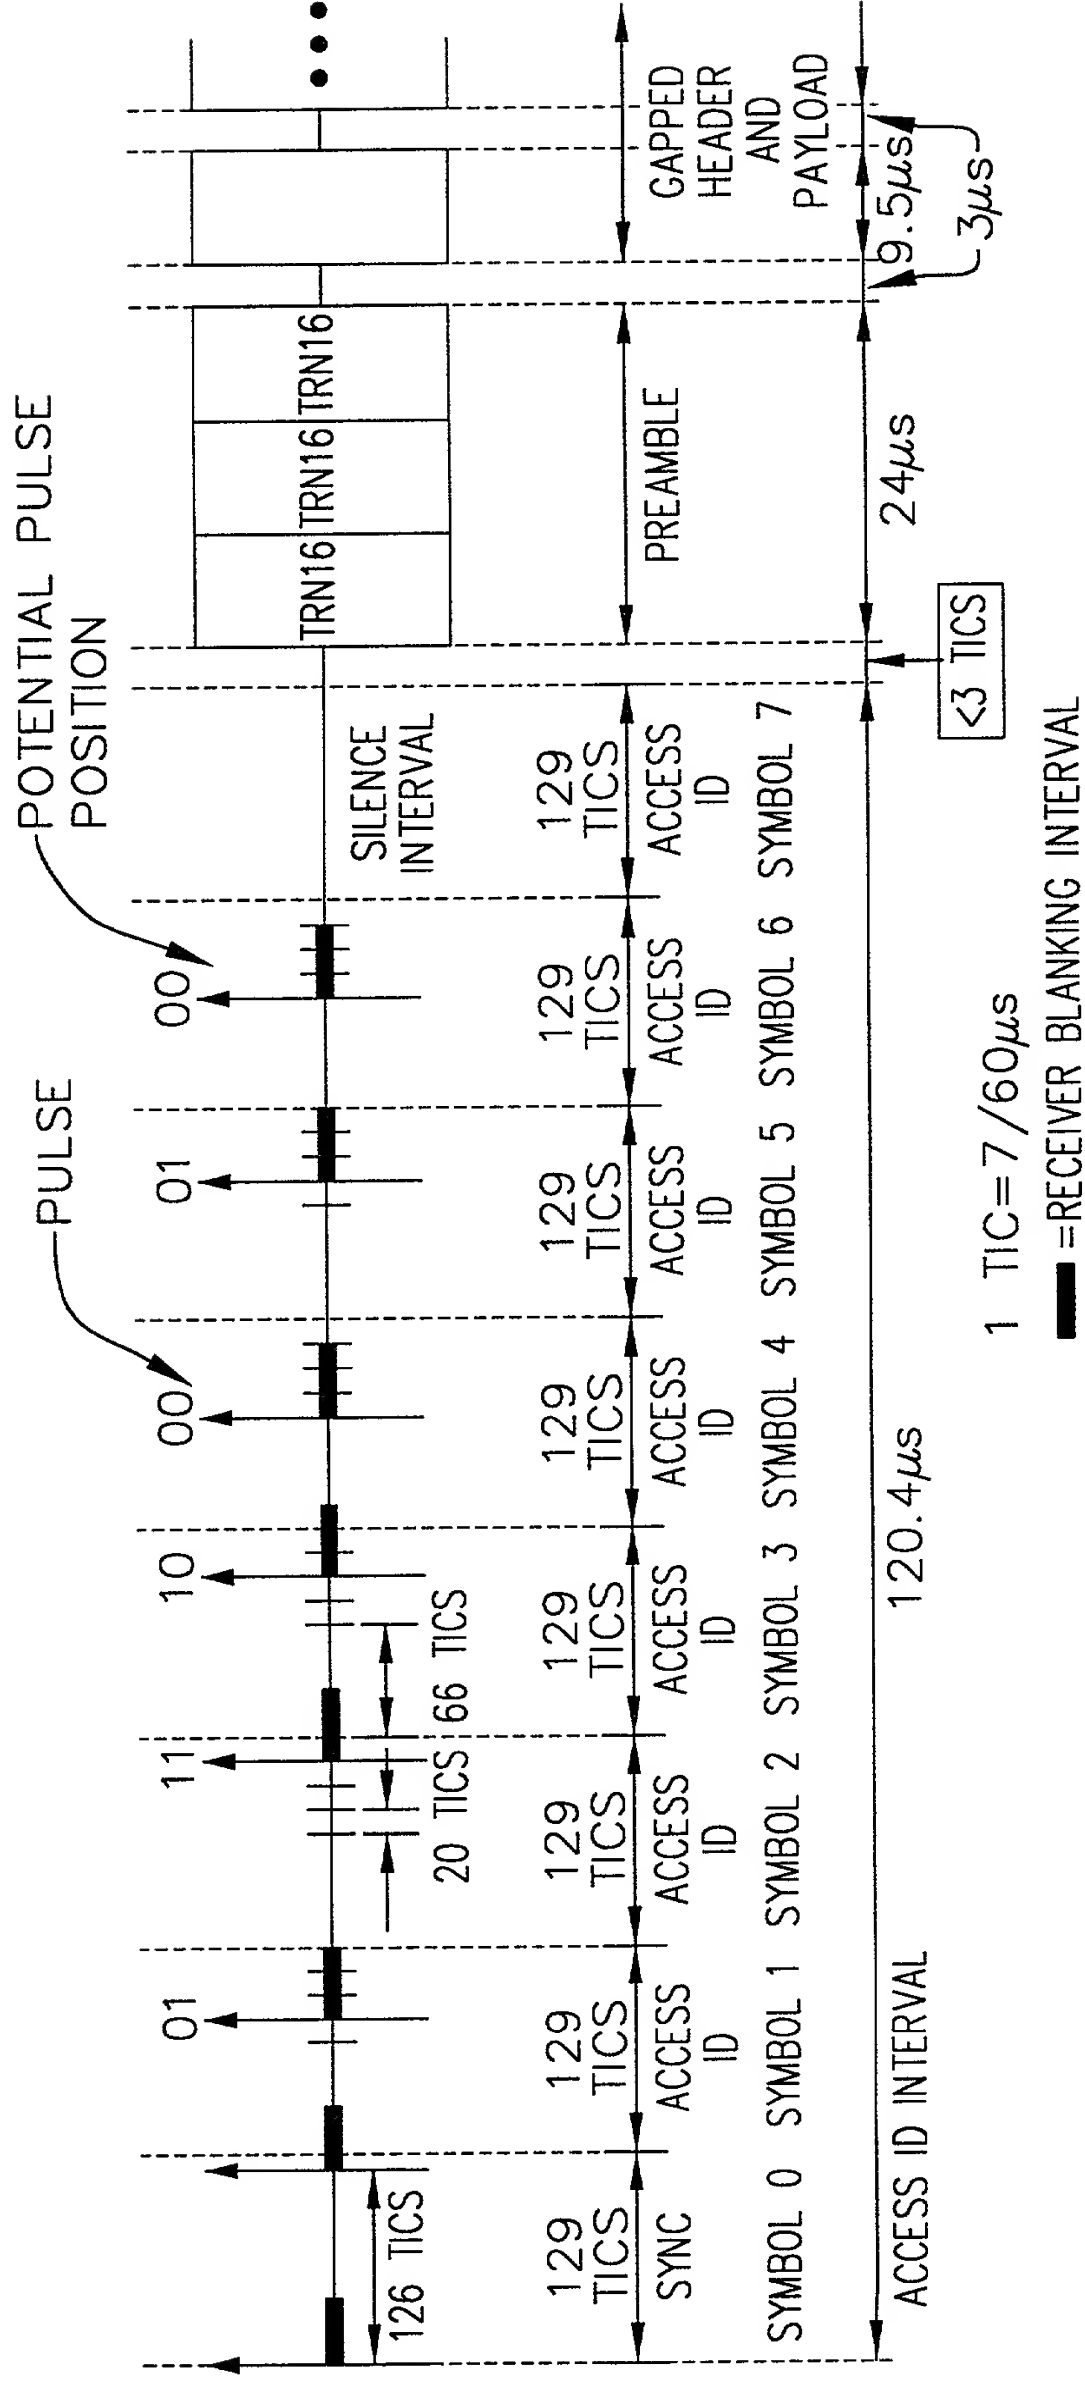


FIG.23a

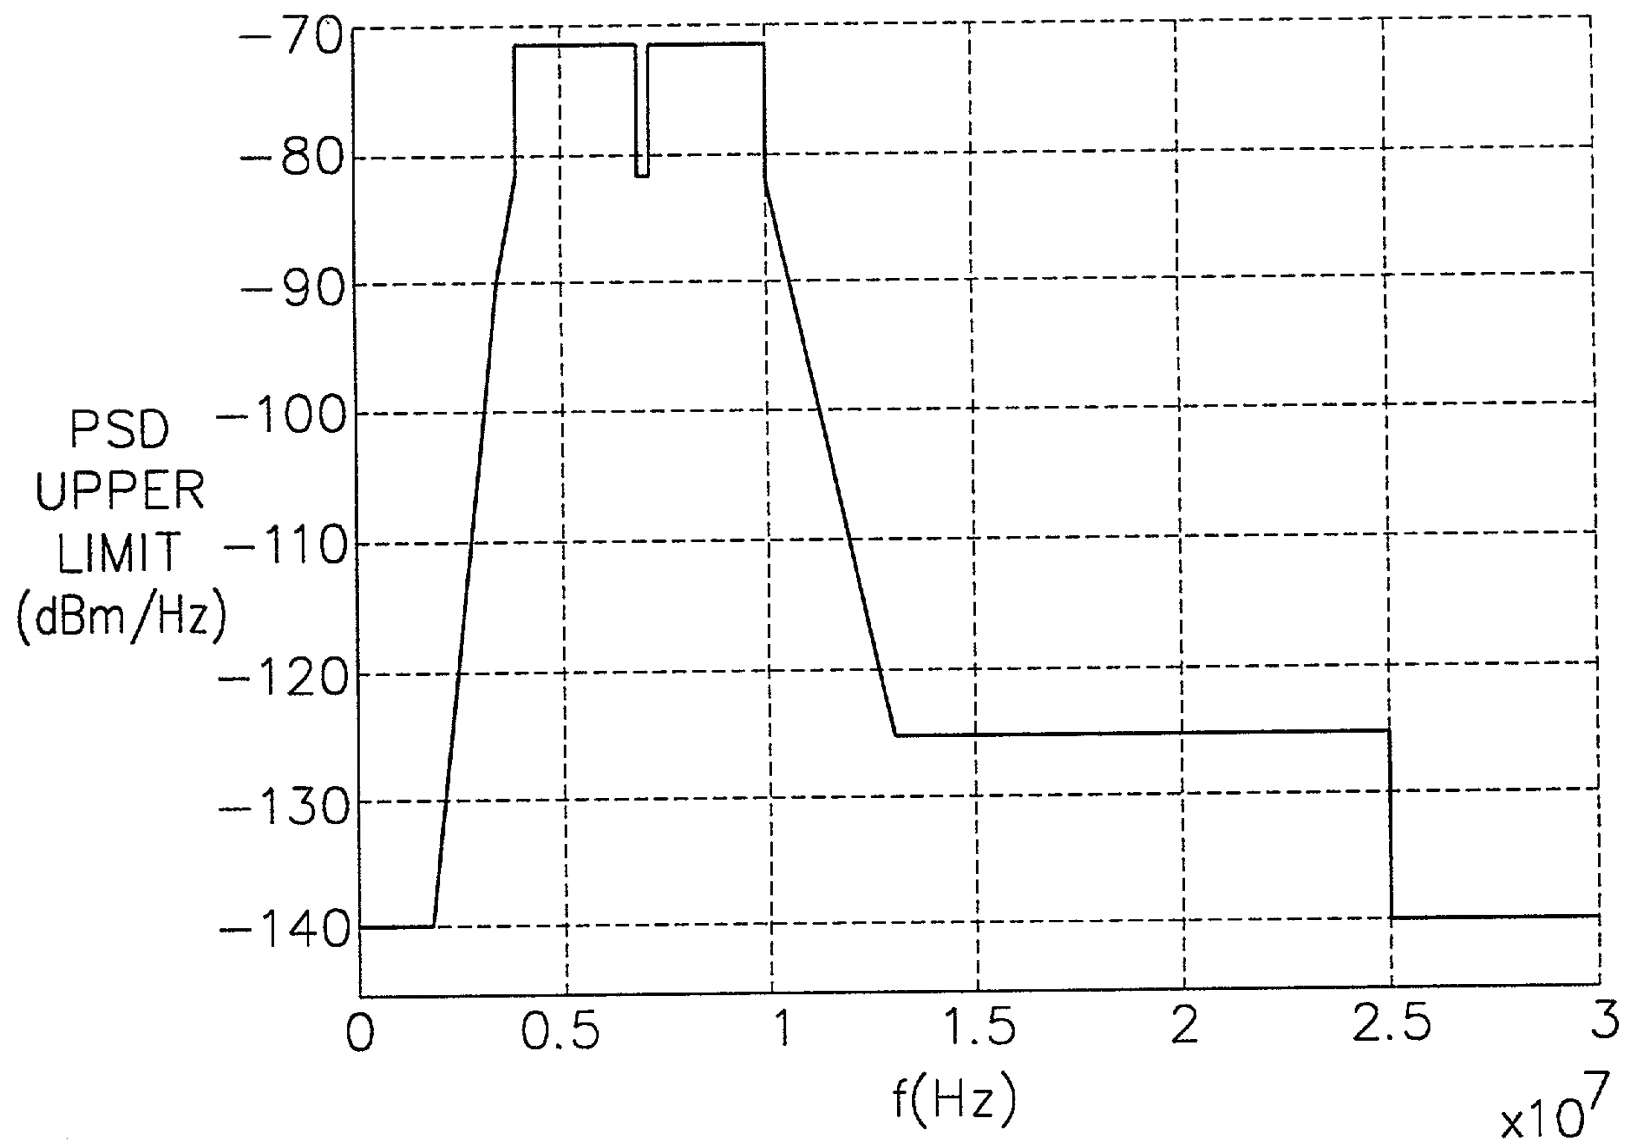


FIG.23b

FREQUENCY(MHz)	PSD LIMIT(dBm/Hz)
$0.015 < f \leq 1.7$	-140
$1.7 < f \leq 3.5$	$-140 + (f - 1.7) * 50.0 / 1.8$
$3.5 < f \leq 4.0$	$-90 + (f - 3.5) * 17.0$
$4.0 < f \leq 7.0$	-71.5
$7.0 < f \leq 7.3$	-81.5
$7.3 < f \leq 10.0$	-71.5
$10.0 < f \leq 13.0$	$-81.5 - (f - 10.0) * 43.5 / 3.0$
$13.0 < f \leq 25.0$	-125
$25.0 < f \leq 30.0$	-140

NORMALIZED MAGNITUDE *FIG. 24*

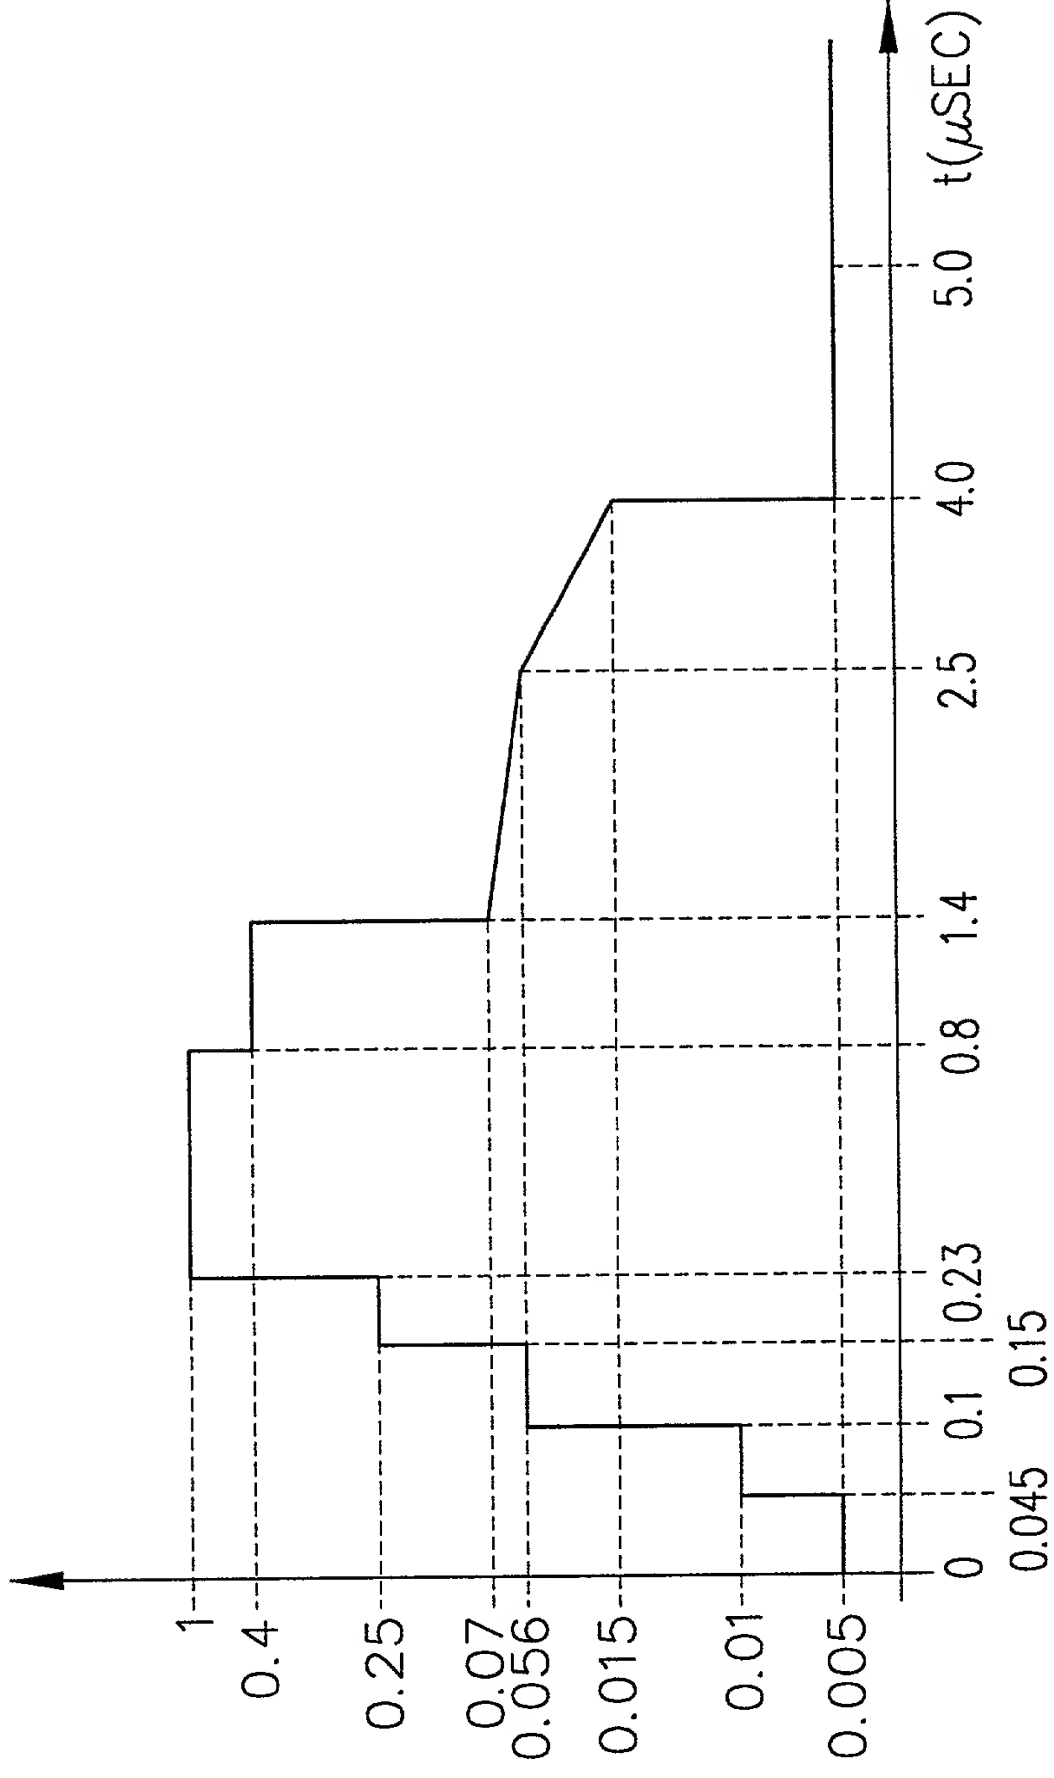


FIG.25

FREQUENCY RANGE(MHz)	MAXIMUM PEAK-TO-PEAKINTERFERER LEVEL(VOLTS)
0.01-0.1	6.0
0.1-0.6	3.3
0.6-1.7	1.0
1.7-4.0	0.1
7.0-7.3	0.1
10.0-10.15	0.1
14.0-14.35	0.28
18.068-18.168	0.5
21.0-21.45	0.5
24.89-24.99	0.5
28.0-29.7	0.5

FIG.26

FREQUENCY RANGE(MHz)	MAXIMUM PEAK-TO-PEAKINTERFERER LEVEL(VOLTS)
0.01-0.1	20.0
0.1-0.6	20.0
0.6-1.7	10.0
1.7-4.0	2.5
7.0-7.3	2.5
10.0-10.15	2.5
14.0-14.35	5.0
18.068-18.168	5.0
21.0-21.45	5.0
24.89-24.99	5.0
28.0-29.7	5.0

FIG.27

FREQUENCY RANGE(kHz)	MIN.IMPEDANCE(OHMS)
$0 < f \leq 0.285$	1 M
$0.285 < f \leq 2.85$	100 k
$2.85 < f \leq 28.5$	10 k
$28.5 < f \leq 95$	4.0 k
$95 < f \leq 190$	2.0 k
$190 < f \leq 285$	1.4 k
$285 < f \leq 380$	1.0 k
$380 < f \leq 475$	850
$475 < f \leq 570$	700
$570 < f \leq 665$	600
$665 < f \leq 760$	525
$760 < f \leq 855$	450
$855 < f \leq 950$	400
$950 < f \leq 1000$	350
$1000 < f \leq 1400$	175
$1400 < f \leq 2300$	100
$2300 < f \leq 2850$	50
$2850 < f \leq 3085$	25
$3085 < f \leq 3725$	10
$3725 < f \leq 3935$	25
$3935 < f \leq 4000$	50
$10000 < f \leq 10450$	40
$10450 < f \leq 10925$	25
$10925 < f \leq 13125$	10
$13125 < f \leq 14175$	25
$14175 < f \leq 16800$	50
$16800 < f \leq 21000$	100
$21000 < f \leq 30000$	50

FIG. 28

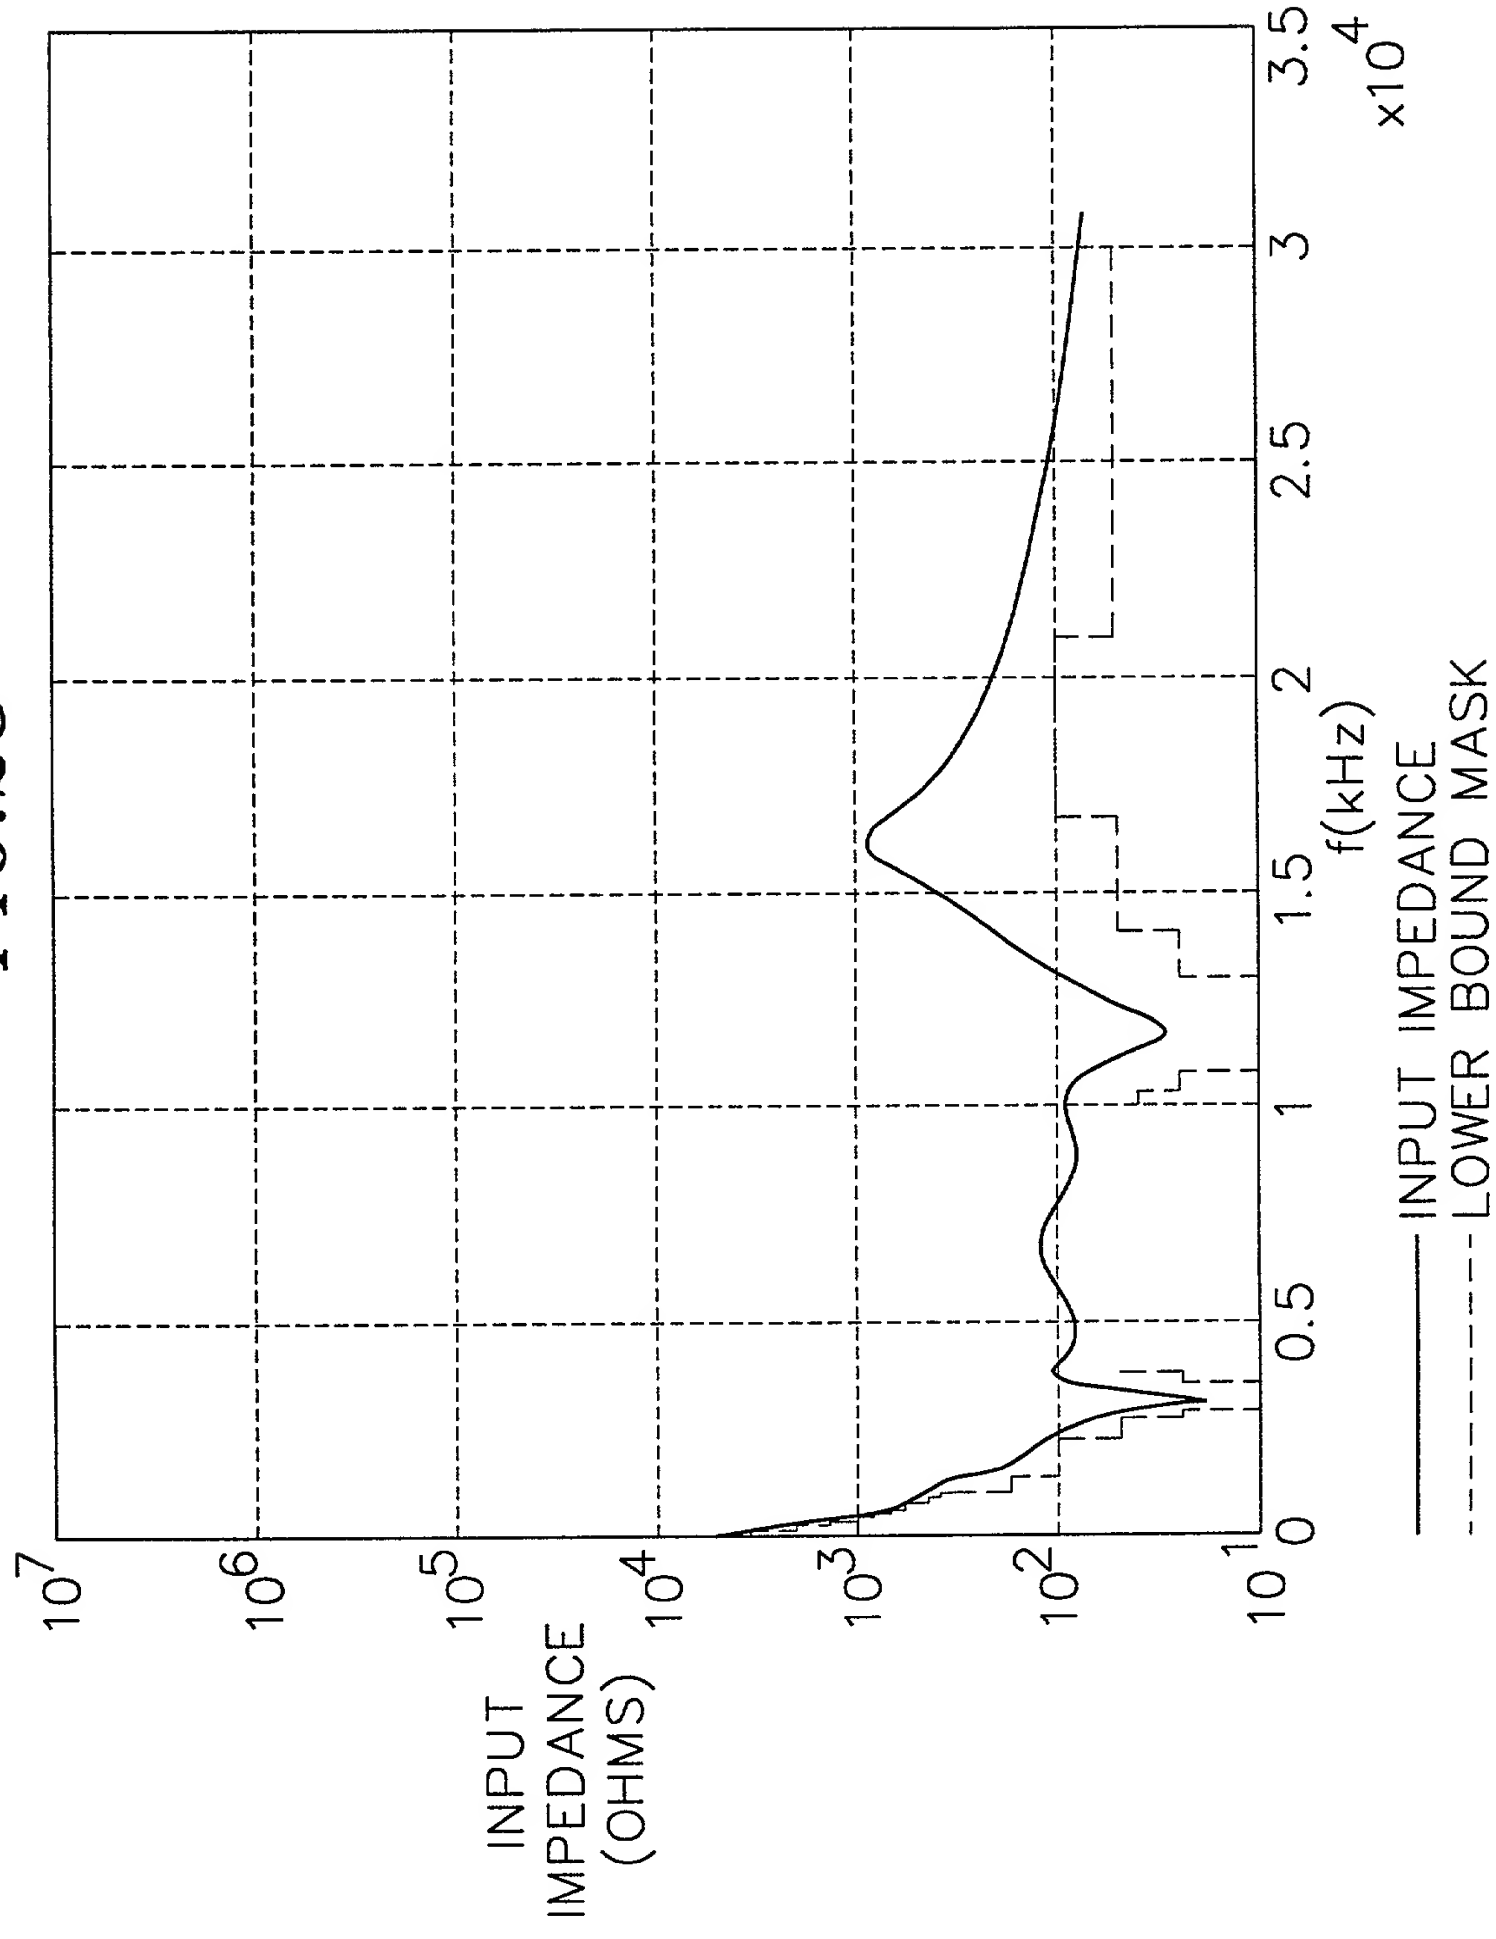


FIG. 29

OSI	IEEE	FUNCTION
DATA LINK	-	LINK LAYER SIGNALING(DRIVER) a) RATE ADAPTATION, QoS AND 1M8 COMPATIBILITY b) LARQ ERROR RECOVERY c) LINK INTEGRITY AND CAPABILITY DISCOVERY
	MAC CONTROLLER LAYER	MAC CONTROLLER LAYER FUNCTIONS a) HOST INTERFACE b) CONTROL AND STATUS REGISTERS, INTERRUPTS c) DMA TRANSFERS, DATA BUFFERING AND COMMAND LIST INTERPRETATION d) PERFORMANCE COUNTERS e) MAC ADDRESS FILTERING, WAKE-ON-LAN PROCESSING
	MII	OPTIONAL MII INTERFACE (IN PHY-ONLY)
	LLC- LOGICAL LINK CONTROL	OPTIONAL LINK LAYER SIGNALING (IN PHY-ONLY) a) RATE ADAPTATION, QoS AND 1M8 COMPATIBILITY b) LINK INTEGRITY AND CAPABILITY DISCOVERY
	V2 MAC	FRAME PROCESSING (TRANSMIT AND RECEIVE) a) FRAMING (FRAME BOUNDARY DELINEATION AND SYNCHRONIZATION) b) ERROR DETECTION (FCS GENERATION AND CHECK, FRAGMENT DETECTION)
PHY		MEDIA ACCESS CONTROL (MAC) a) CSMA/CD b) COLLISION RESOLUTION (BACKOFF ALGORITHM)
	PHY	PHYSICAL CODING SUBLAYER a) CODING AND MODULATION, CARRIER SENSE, COLLISION DETECTION

FIG. 30

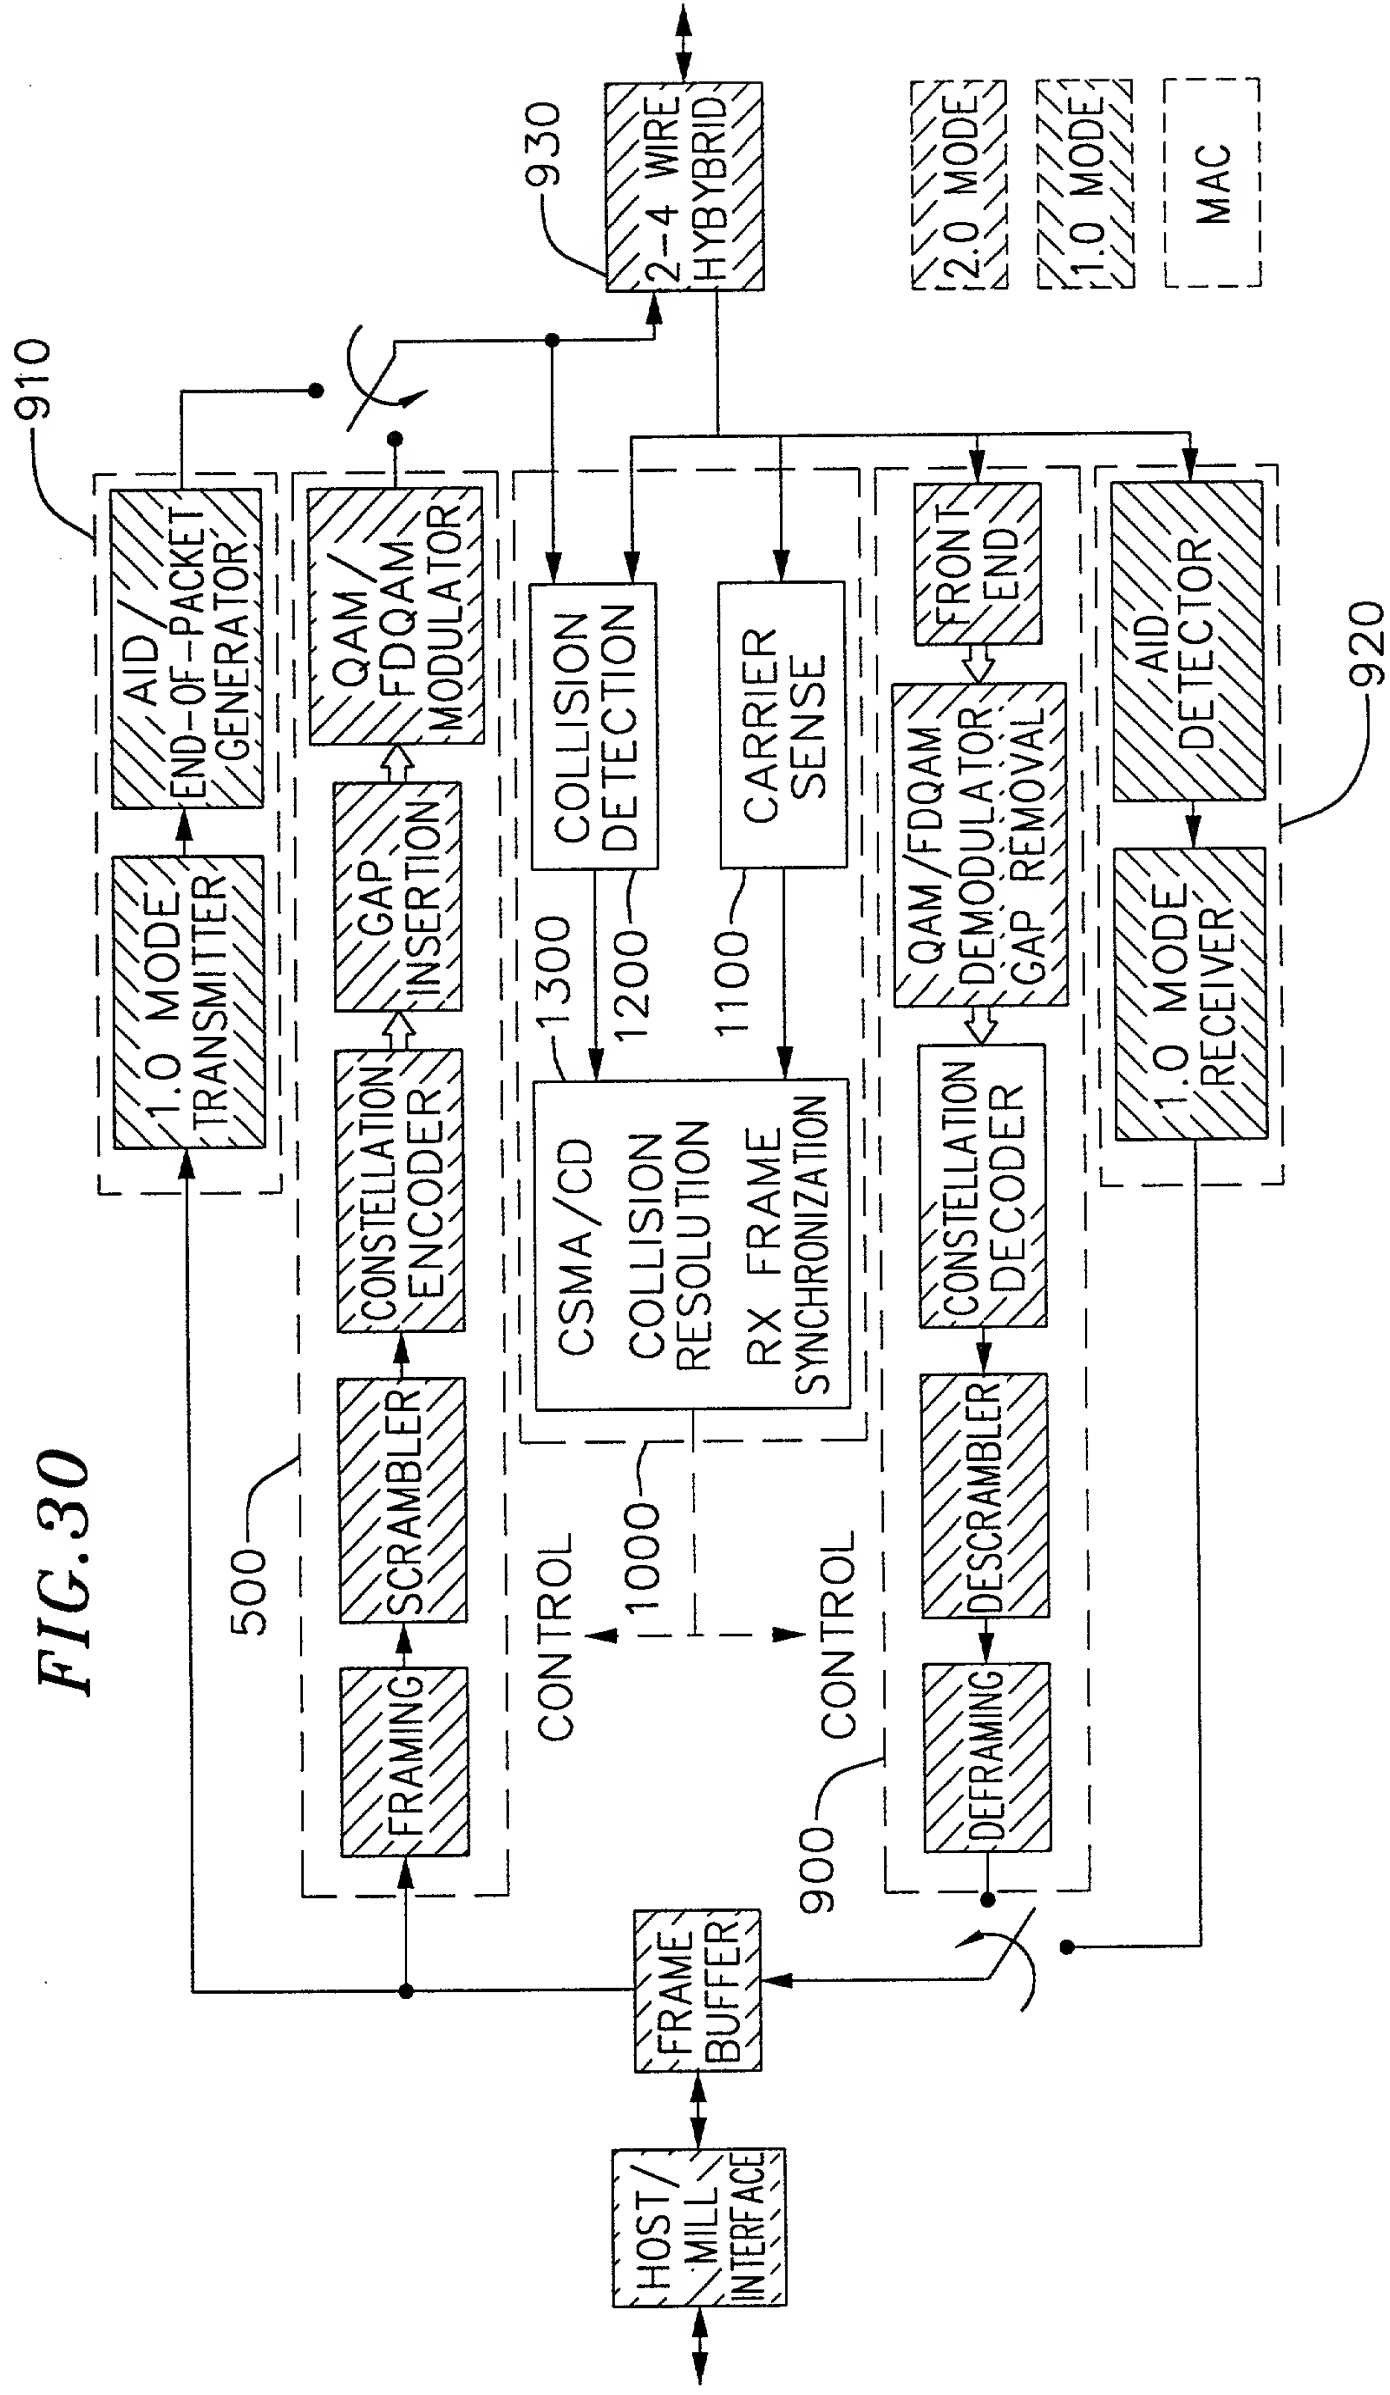


FIG.31

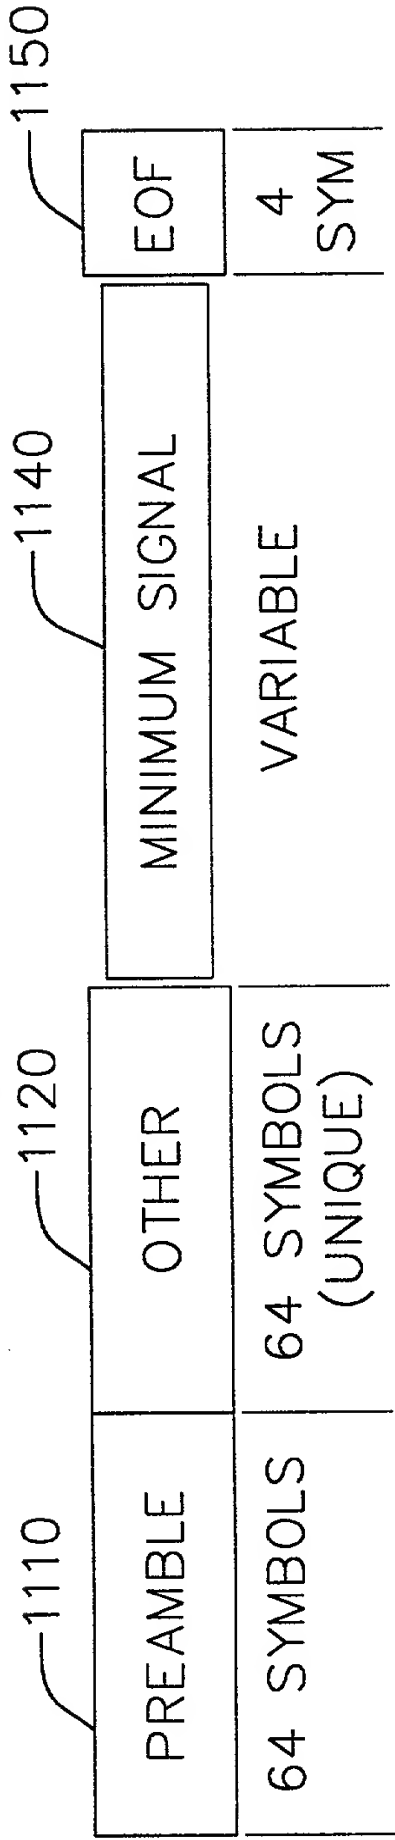


FIG.32

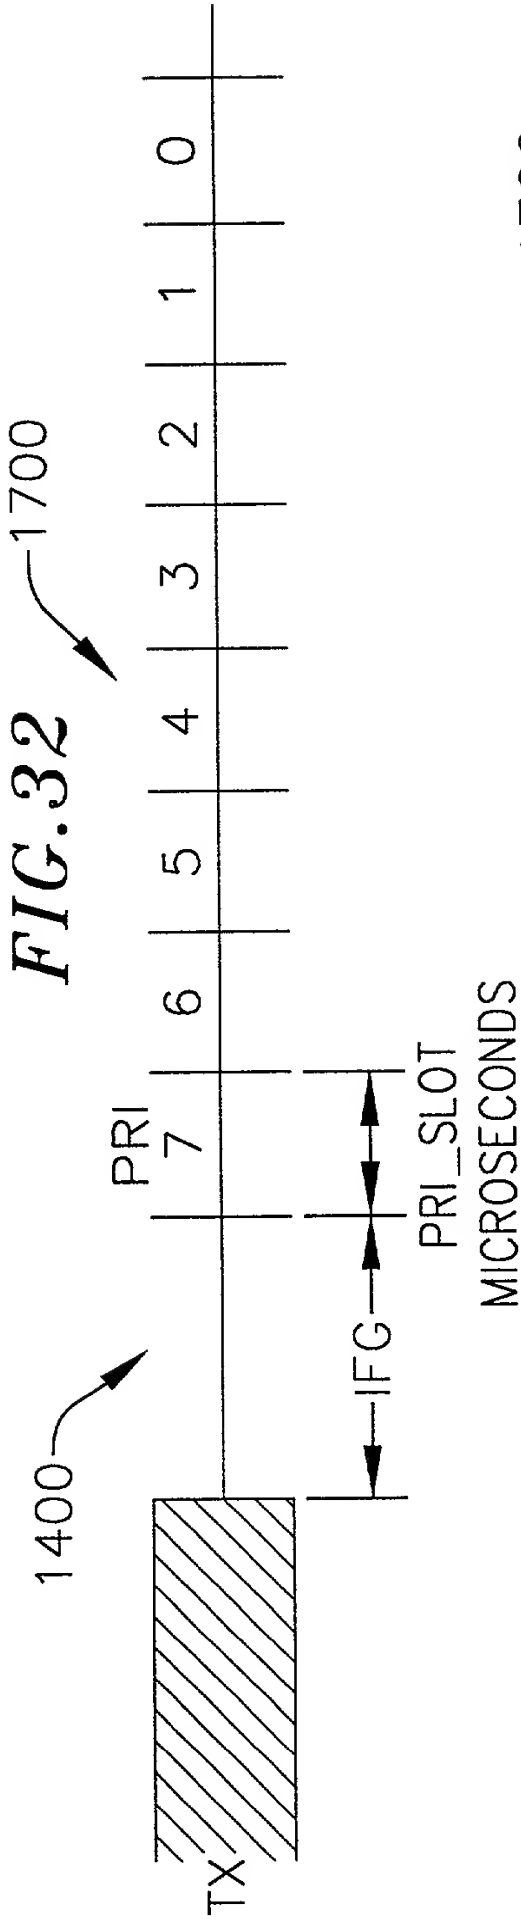


FIG.33

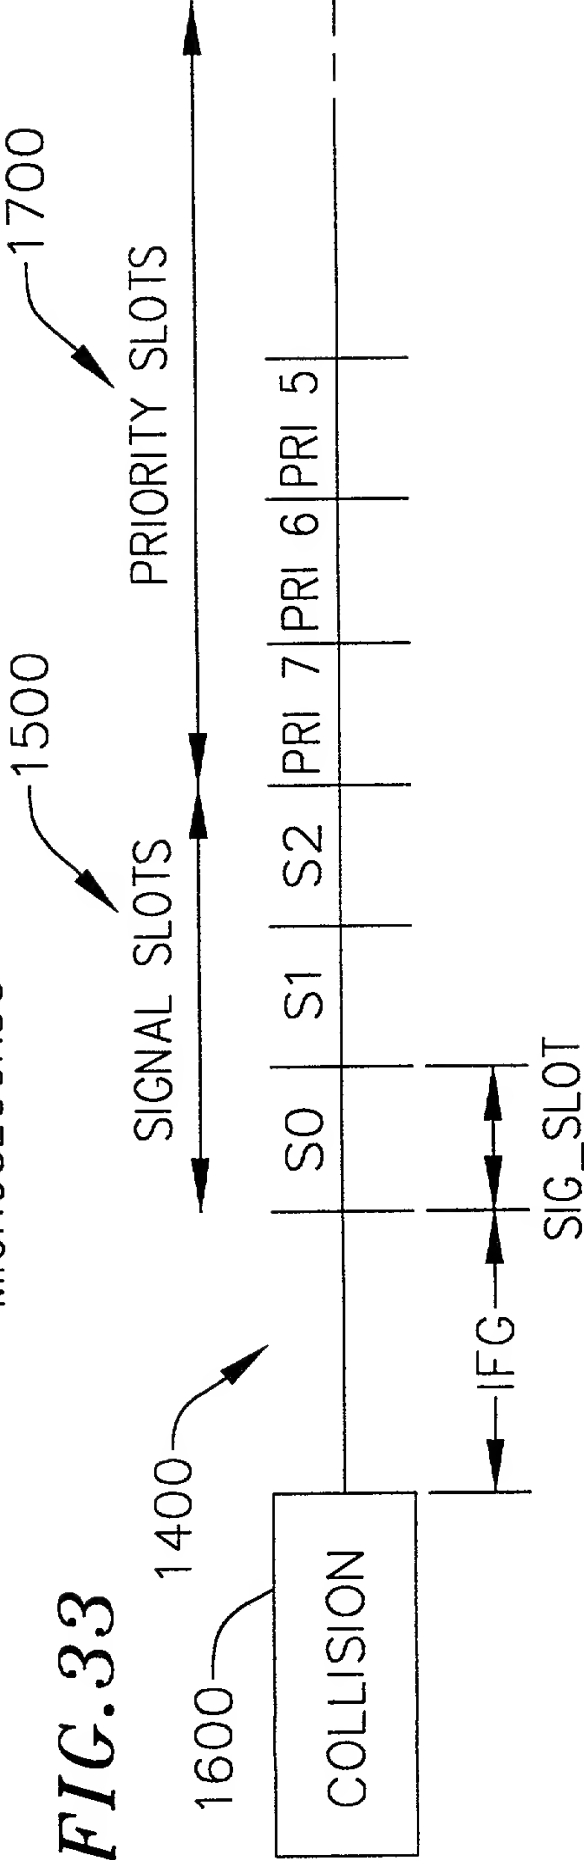


FIG. 34a

WITHOUT PRIORITY ACCESS:

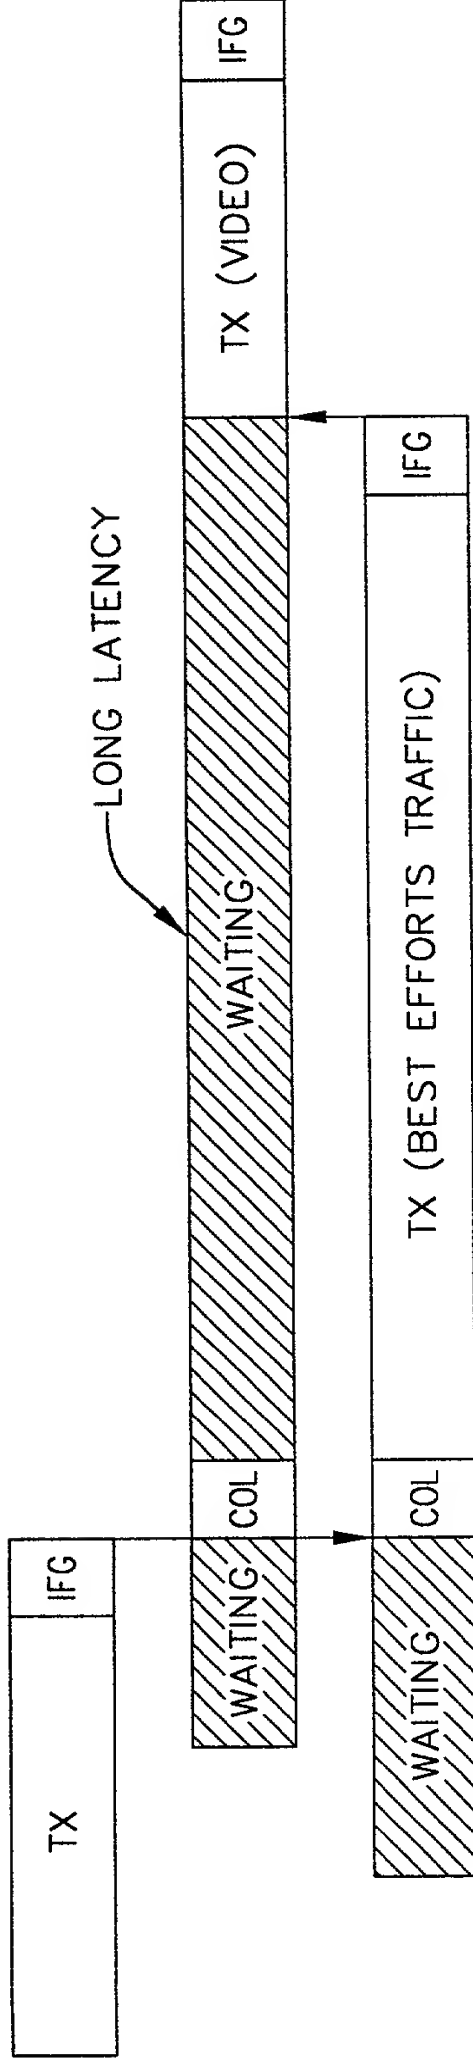


FIG. 34b

WITH PRIORITY ACCESS:

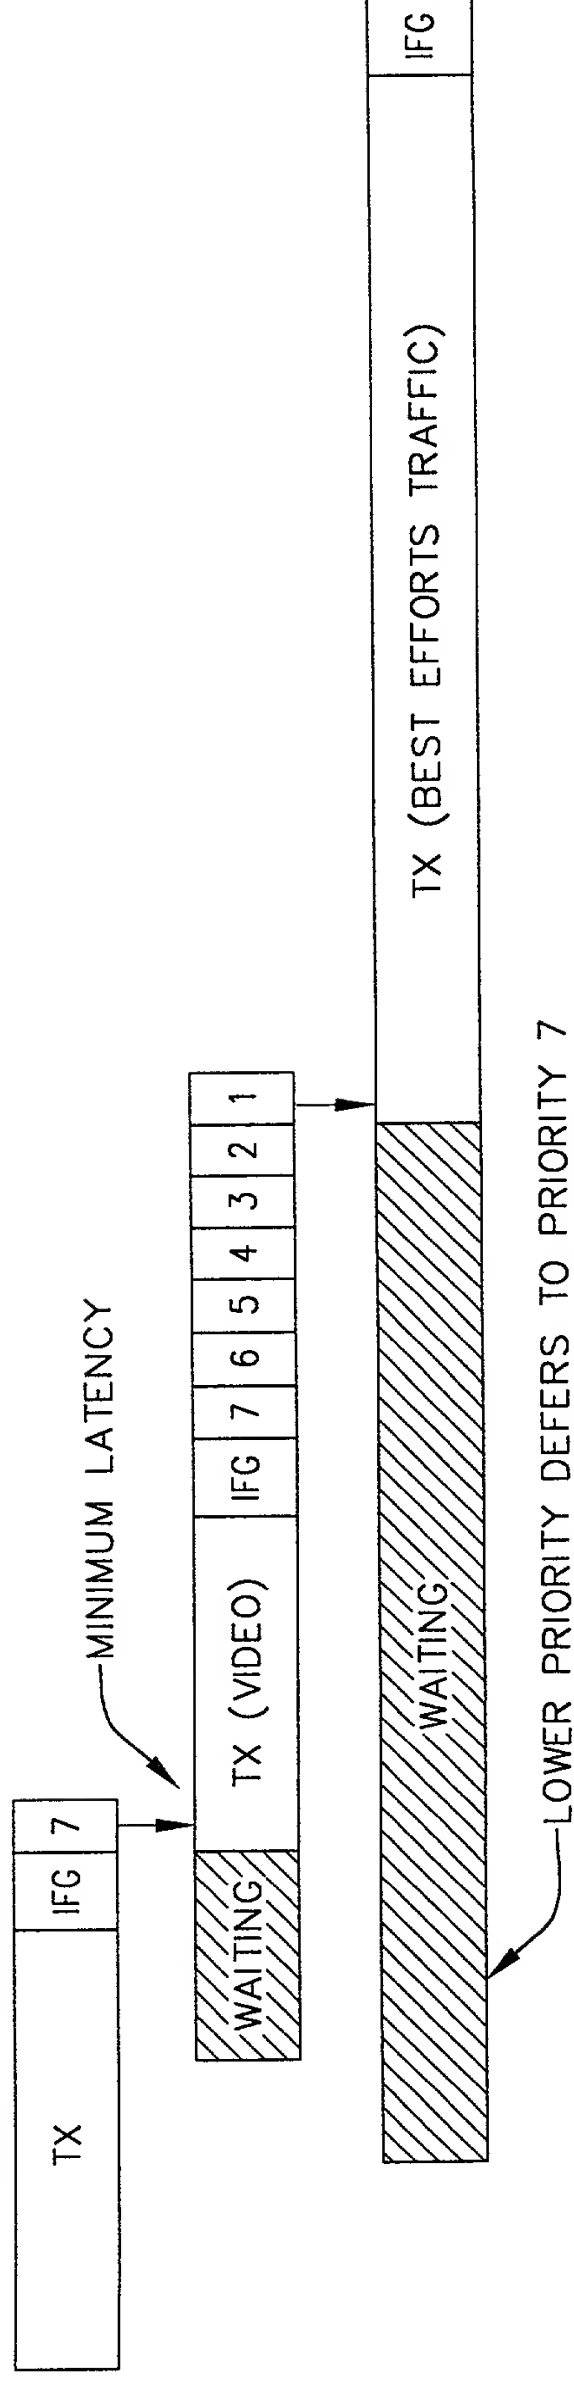


FIG. 35

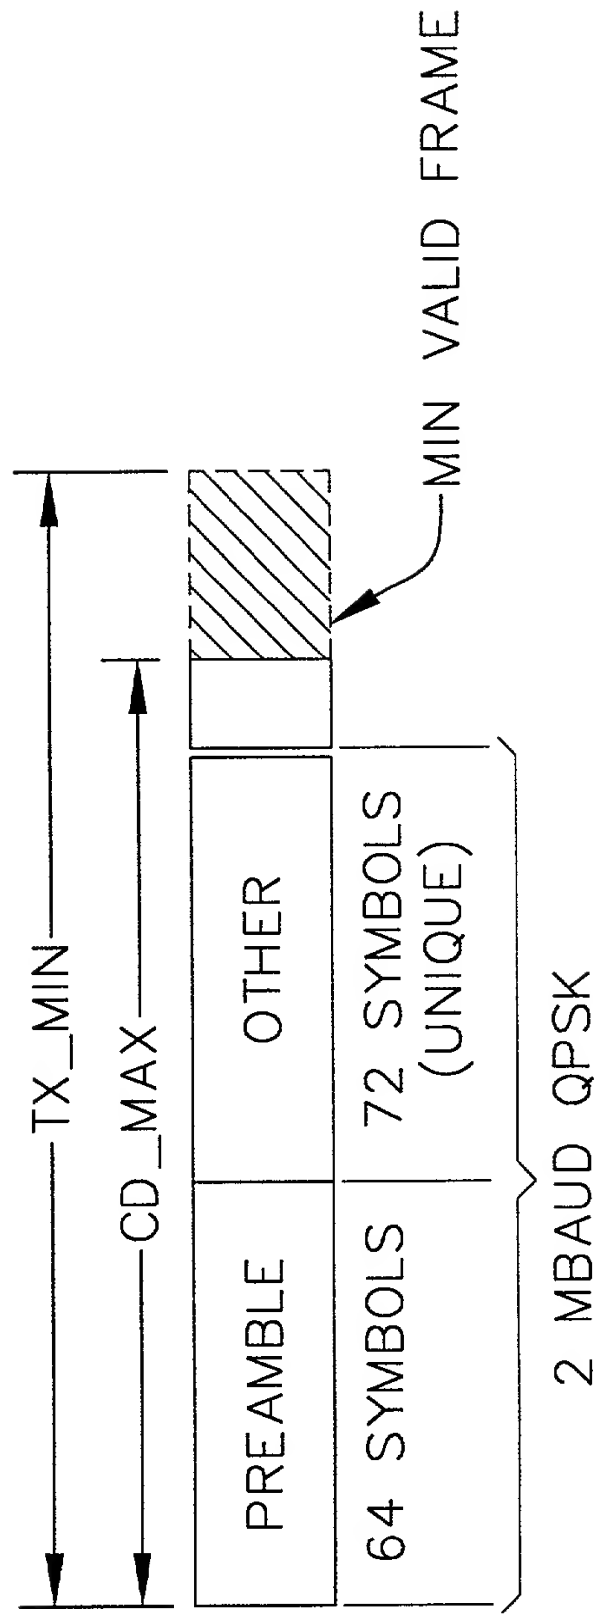


FIG.36

SECTION	PARAMETER	MIN	MAX	UNITS
BASIC CSMA	NOMINAL_RMS_VOLTAGE	100	—	mVrms
	CS_RANGE	38	—	dB
	CS_IFG	29.0–Δ	29.0+Δ	MICROSECONDS
	CS_DEFER	—	12.0	MICROSECONDS
	MINFRAMESIZE	64	—	OCTETS
	MAXFRAMESIZE	1526	SEE 3.3.7.1	OCTETS
	TX_FRAME	92.5	SEE 3.3.7.1	MICROSECONDS
	TX_ON	0	4.0	MICROSECONDS
PRIORITY ACCESS	PRI_SLOT	21.0–Δ	21.0+Δ	MICROSECONDS
COLLISION DETECTION	CD_FRAG	70.0–Δ	70.0+Δ	MICROSECONDS
	CD_MIN	32.0	—	MICROSECONDS
	CD_THRESHOLD (RECOMMENDED)	—	92.0	MICROSECONDS
	CD_RANGE	36	—	dB
	CD_OFFSET_EARLY	—	12.0	MICROSECONDS
	CD_OFFSET_LATE	—	15.0	MICROSECONDS
COLLISION RESOLUTION	ATTEMPTLIMIT	256	256	
	SIG_SLOT	32.0–Δ	32.0+Δ	MICROSECONDS

FIG.37

FIELD	LENGTH	EXPLANATION
DA	6 OCTETS	DESTINATION ADDRESS
SA	6 OCTETS	SOURCE ADDRESS
ETHERTYPE	2 OCTETS	0x86c (LINK PROTOCOL FRAME. ASSIGNED TO ASSIGNEE BY IEEE)
SSTYPE	1 OCTET	0-RESERVED 1-RATE REQUEST CONTROL FRAME 2-LINK INTEGRITY SHORT FRAME 3-CAPABILITIES ANNOUNCEMENT 4-LARQ 5-VENDOR-SPECIFIC SHORT FORMAT TYPE 6-126 RESERVED 127 RESERVED VALUES 128-255 CORRESPOND TO THE LONG SUBTYPE
SSLENGTH	1 OCTET	NUMBER OF ADDITIONAL OCTETS IN THE CONTROL HEADER, STARTING WITH THE SSVERSION FIELD (OR THE FIRST OCTET FOLLOWING SSLENGTH IF IT IS NOT DEFINED AS SSVERSION) AND ENDING WITH THE SECOND (LAST) OCTET OF THE NEXT ETHERTYPE FIELD. MIN IS 2 AND MAX IS 225
SSVERSION	1 OCTET	VERSION NUMBER OF THE CONTROL INFORMATION
DATA	0-252 OCTETS	CONTROL INFORMATION
NEXT ETHERTYPE	2 OCTETS	ETHERTYPE/LENGTH OF NEXT LAYER PROTOCOL, 0 IF NONE.
PAD	41-0 OCTETS	PADDING REQUIRED TO MEET MINIMUM IF DATA<41 OCTETS
FCS	4 OCTETS	FRAME CHECK SEQUENCE

FIG.38

FIELD	LENGTH	EXPLANATION
DA	6 OCTETS	DESTINATION ADDRESS
SA	6 OCTETS	SOURCE ADDRESS
ETHERTYPE	2 OCTETS	0x886c (LINK PROTOCOL FRAME. ASSIGNED TO EPIGRAM BY IEEE)
LSTYPE	2 OCTETS	32768 RESERVED 32769 VENDOR-SPECIFIC LONG-FORMAT 32770-65534 RESERVED 65535 RESERVED
LSLENGTH	2 OCTETS	NUMBER OF ADDITIONAL OCTETS IN THE CONTROL HEADER, STARTING WITH THE SSVERSION FIELD (OR THE FIRST OCTET FOLLOWING SSLENGTH IF IT IS NOT DEFINED AS SSVERSION) AND ENDING WITH THE SECOND (LAST) OCTET OF THE NEXT ETHERTYPE FIELD. MIN IS 2 AND MAX IS 65535.
LSVERSION	1 OCTET	VERSION NUMBER OF THE FOLLOWING PROTOCOL INFORMATION
DATA	LSLENGTH-3 OCTETS	LSTYPE PROTOCOL DEPENDENT DATA
NEXT ETHERTYPE	2 OCTETS	ETHERTYPE/LENGTH OF NEXT LAYER PROTOCOL, 0 IF NONE.
PAD	42-0 OCTETS	PAD TO MINIMUM SIZE IF NEEDED
FCS	4 OCTETS	FRAME CHECK SEQUENCE

FIG.39

FIELD	LENGTH	MEANING
DA	6 OCTETS	DESTINATION ADDRESS
SA	6 OCTETS	SOURCE ADDRESS
ETHERTYPE	2 OCTETS	0x886c (LINK CONTROL FRAME)
SSTYPE	1 OCTET	=1
SSELENGTH	1 OCTET	NUMBER OF ADDITIONAL OCTETS IN THE CONTROL HEADER, STARTING WITH THE SSVERSION FIELD AND ENDING WITH THE SECOND(LAST) OCTET OF THE NEXT ETHERTYPE FIELD. THE MINIMUM VALUE OF SSELENGTH IS 8 FOR SSVERSION 0.
SSVERSION	1 OCTET	=0
OPCODE	1 OCTET	OPERATION CODE FOR THIS CONTROL MESSAGE.
NUMBANDS	1 OCTET	NUMBER OF BANDS SPECIFIED IN THIS CONTROL. EACH BAND HAS A TWO OCTET DESCRIPTOR. THE FIRST BAND REFERS TO 2 MBAUD MODULATION RATE, THE NEXT TO 4 MBAUD. NUMBANDS SHALL BE 1 OR 2 ON TRANSMISSION FOR 10M8 STATIONS, AND STATIONS SHALL IGNORE BAND ENTRIES BEYOND BAND2 ON RECEIVE IF NUMBANDS IS LARGER THAN 2. THE VALUE 0 IS NOT ALLOWED.
NUMADDR	1 OCTET	NUMBER OF ADDRESSES SPECIFIED IN THE PAYLOAD OF THIS CONTROL MESSAGE. NUMADDR MAY BE ZERO. THE SA IN THE ETHERNET HEADER IS ALWAYS USED, AND IS REFERRED TO IN THE FOLLOWING SECTIONS AS REFADDR0.
BAND1_PE	1 OCTET	2MBAUD, 7 MHz CARRIER: THE PE VALUE THAT SHOULD BE USED TO SEND DATA WHEN THE 2MBAUD BAND IS SELECTED. (1..8)ARE THE ONLY VALID VALUES. THE VALUE 8 IS USED TO REQUEST HPNA 1.0 TYPE FRAMES, AND IS VALID ONLY WHEN THE NETWORK IS OPERATING IN VIM2MODE, AND ONLY IN BAND 1.
BAND1_RANK	1 OCTET	THE RANK ORDER OF THE REQDAS' PREFERENCE FOR THIS BAND, 1 IS HIGHEST PREFERENCE, AND THE OTHER BANDS ARE ASSIGNED SUCCESSIVELY LARGER RANK VALUES, NO TWO BANDS SHALL HAVE THE SAME RANK.
BAND2_PE	1 OCTET	OPTIONAL, ONLY PRESENT IF NUMBANDS>=2. 4MBAUD, 7 MHz CARRIER: IF INCLUDED, THIS FIELD IS THE PE VALUE THAT SHOULD BE USED TO SEND DATA WHEN THE 4MBAUD BAND IS SELECTED, (0,9..15) ARE THE ONLY VALID VALUES.
BAND2_RANK	1 OCTET	OPTIONAL, ONLY PRESENT IF NUMBANDS>=2. RANK ORDER OF REQDAS' PREFERENCE FOR THIS BAND.
REFADDR1	6 OCTETS	OPTIONAL. PRESENT IF NUMADDR>=1. THE SECOND MAC ADDRESS FOR WHICH THE RATES ARE BEING SPECIFIED, TYPICALLY BROADCAST OR A MULTICAST ADDRESS.
REFADDR2	6 OCTETS	OPTIONAL. PRESENT IF NUMADDR>=2. THE THIRD MAC ADDRESS FOR WHICH THE RATES ARE BEING SPECIFIED.
...		[ADDITIONAL INSTANCES OF REFADDR, UNTIL THE NUMBER OF REFADDR FIELDS EQUALS NUMADDR]
NEXT ETHERTYPE	2 OCTETS	=0
PAD		TO REACH MINFRAMESIZE IF REQUIRED
FCS	4 OCTETS	FRAME CHECK SEQUENCE

FIG. 40

PE	DATA RATE	MEANING
0	N/A	MEANS THIS BAND IS NOT SUPPORTED
1	4 MBIT/S	2 MBAUD FDQAM, 2 BITS PER BAUD
2	6 MBIT/S	2 MBAUD FDQAM, 3 BITS PER BAUD
3	8 MBIT/S	2 MBAUD FDQAM, 4 BITS PER BAUD
4	10 MBIT/S	2 MBAUD FDQAM, 5 BITS PER BAUD
5	12 MBIT/S	2 MBAUD FDQAM, 6 BITS PER BAUD
6	14 MBIT/S	2 MBAUD FDQAM, 7 BITS PER BAUD
7	16 MBIT/S	2 MBAUD FDQAM, 8 BITS PER BAUD
8	1 MBIT/S	HPNA 1.0
9	8 MBIT/S	4 MBAUD QAM, 2 BITS PER BAUD
10	12 MBIT/S	4 MBAUD QAM, 3 BITS PER BAUD
11	16 MBIT/S	4 MBAUD QAM, 4 BITS PER BAUD
12	20 MBIT/S	4 MBAUD QAM, 5 BITS PER BAUD
13	24 MBIT/S	4 MBAUD QAM, 6 BITS PER BAUD
14	28 MBIT/S	4 MBAUD QAM, 7 BITS PER BAUD
15	32 MBIT/S	4 MBAUD QAM, 8 BITS PER BAUD


FIG. 41

OPCODE	MEANING
0	RATE CHANGE REQUEST
1	RATE TEST REQUEST
2	RATE TEST REPLY
3-255	RESERVED

FIG.42

BAND SPECIFICATION	A PAYLOAD ENCODING (PE) AND RANK ASSOCIATED WITH A GIVEN BAND. A BAND IS A SINGLE COMBINATION OF BAUD RATE, MODULATION TYPE (E.G. QAM OR FDQAM) AND CARRIER FREQUENCY. TWO BANDS ARE DEFINED IN HPNAVZ
LOGICAL CHANNEL, CHANNEL	A FLOW OF FRAMES FROM A SENDER TO ONE OR MORE RECEIVERS ON A SINGLE NETWORK SEGMENT, CONSISTING OF ALL THE FRAMES WITH A SINGLE COMBINATION OF DA AND SA.
RECEIVER	A STATION THAT RECEIVES FRAMES SENT ON A PARTICULAR CHANNEL. IF THE DESTINATION IS A UNICAST ADDRESS THERE IS AT MOST ONE RECEIVER. IF THE DESTINATION IS A GROUP ADDRESS (INCLUDING BROADCAST), THERE MAY BE MANY RECEIVERS.
RECEIVER PE	THE PREFERRED PE TO BE USED ON THIS CHANNEL, AS DETERMINED BY THE RECEIVER.
RRCF	RATE REQUEST CONTROL FRAME. SENT FROM THE RECEIVER TO THE SENDER TO EFFECT A CHANGE IN PE.
REFADDRO	THE SA IN THE ETHERNET HEADER OF THE RRCF FRAME. THIS IS THE DA OF THE RECEIVER (FOR THE CHANNEL), AND IS ALWAYS USED BY THE CHANNEL SENDER AS THE FIRST REFADDR PROCESSED.
REFADDR1.. REFADDR<n>	OTHER ADDRESSES INCLUDING BROADCAST AND MULTICAST ADDRESSES FOR WHICH THE RECEIVER IS INDICATING RATE INFORMATION TO THE SENDER. THE CHANNEL RECEIVER'S STATION ADDRESS (REFADDRO) SHOULD NOT BE PUT IN THE LIST OF ADDITIONAL REFADDR'S. NOTE 1: AT LEAST ONE REFADDR FIELD IS NECESSARY TO SUPPORT RATE NEGOTIATION FOR BROADCAST AND MULTICAST ADDRESSES SINCE THESE CANNOT BE USED AS THE SOURCE ADDRESS IN THE ETHERNET HEADER.
SENDER	THE SENDING STATION FOR A CHANNEL, USUALLY THE STATION OWNING THE SOURCE MAC ADDRESS.
SENDER PE	THE PREFERRED PE ASSOCIATED WITH A CHANNEL, AS NOTED BY THE SENDER.

FIG. 43a

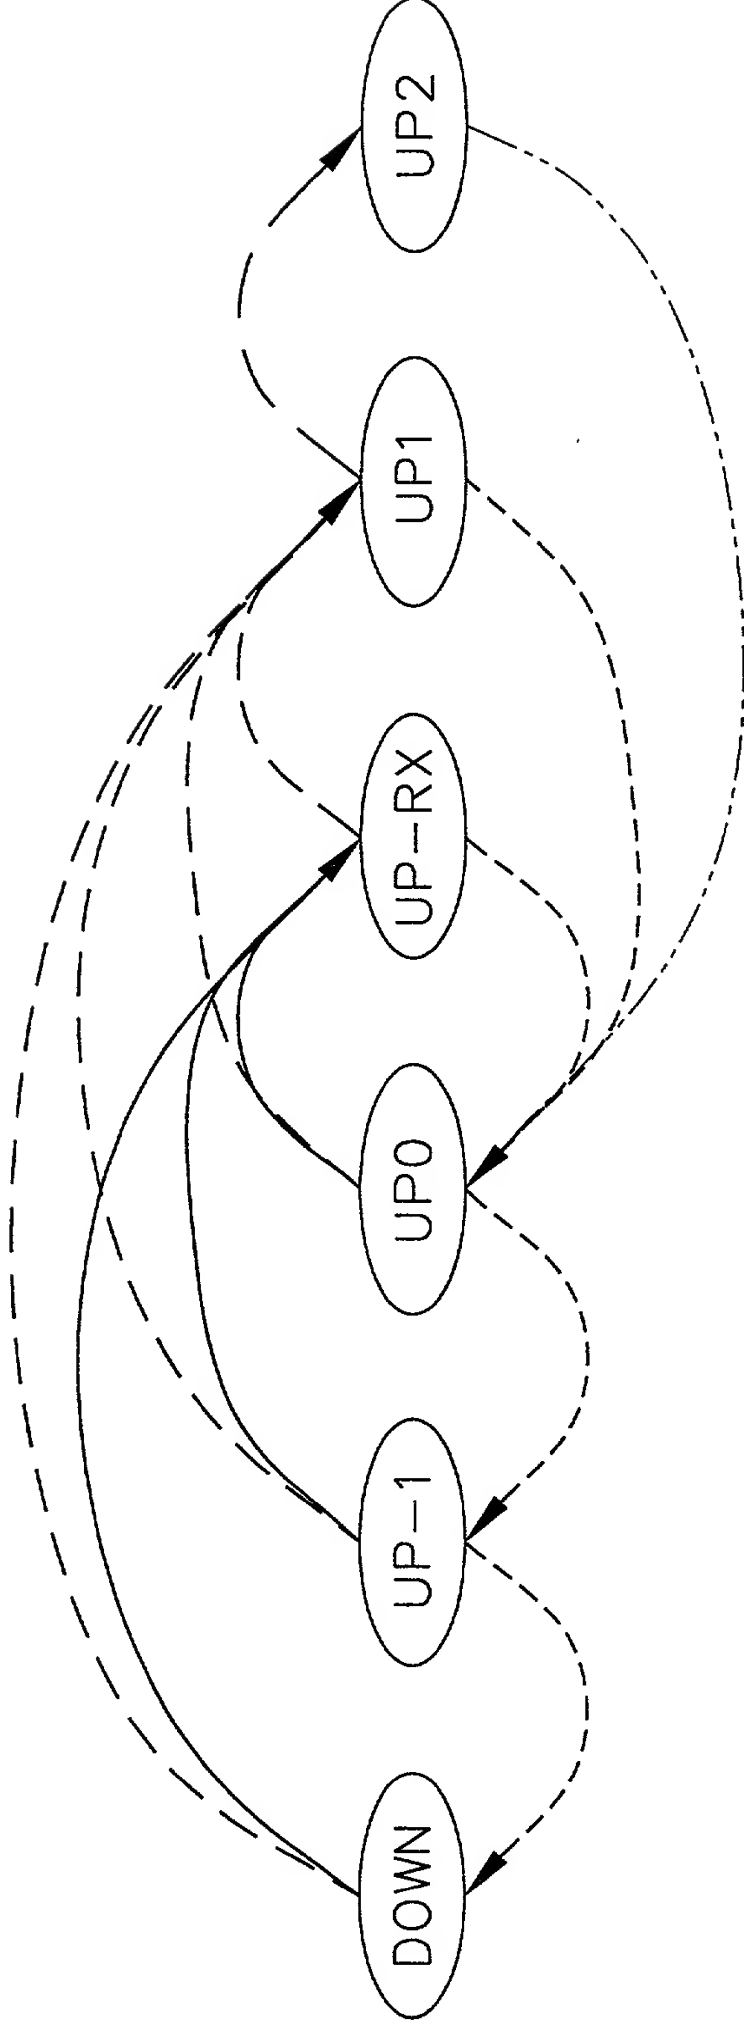

——>RECEIVE ANY NON-BROADCAST FRAME OR LINK INDICATION

- - ->RECEIVE A FRAME WITH DA==BROADCAST (0xFFFFFFFFFFFF)-SET SA1=SA

——>RECEIVE A FRAME WITH DA==BROADCAST (0xFFFFFFFFFFFF) AND SA !=SA1

->TIMEOUT OF 1 SECOND FREE-RUNNING TIMER-SEND LICF, REINITIALIZE FORCE_SEND

->TIMEOUT-IF FORCE_SEND==0 THEN SEND LICF, REINIT ELSE DECREMENT FORCE_SEND

FIG. 43b

	DOWN	UP-1	UP0	UP-RX	UP1	UP2
RECEIVE 1.0 LINK INDICATION OR ANY NON- BROADCAST FRAME	UP-RX (NONE)	UP-RX (NONE)	UP-RX (NONE)	UP-RX (NONE)	UP1 (NONE)	UP2 (NONE)
RECEIVE BROADCAST FRAME WITH SA=SA1	UP1 SET SA1<-SA	UP1 SET SA1<-SA	UP1 SET SA1<-SA	UP1 SET SA1<-SA	UP1 (NONE)	UP2 (NONE)
RECEIVE BROADCAST FRAME WITH SA !=SA1	UP1 SET SA1<-SA	UP1 SET SA1<-SA	UP1 SET SA1<-SA	UP1 SET SA1<-SA	NATIVE:UP2 COMPAT: UP1 (NONE)	UP2 (NONE)
TIMEOUT AND FORCE_SEND=0	DOWN SEND LICF,REINIT FORCE_SEND	DOWN SEND LICF,REINIT FORCE_SEND	UP-1 SEND LICF,REINIT FORCE_SEND	UP0 SEND LICF,REINIT FORCE_SEND	UP0 SEND LICF,REINIT FORCE_SEND	UP0 SEND LICF,REINIT FORCE_SEND
TIMEOUT AND FORCE_SEND>0	DOWN SEND LICF,REINIT FORCE_SEND	DOWN SEND LICF,REINIT FORCE_SEND	UP-1 SEND LICF,REINIT FORCE_SEND	UP0 SEND LICF,REINIT FORCE_SEND	UP0 SEND LICF,REINIT FORCE_SEND	UP0 DECREMENT FORCE_SEND

FIG.44

FIELD	LENGTH	MEANING
DA	6 OCTETS	DESTINATION ADDRESS (FF.FF.FF.FF.FF.FF)
SA	6 OCTETS	SOURCE ADDRESS
ETHERTYPE	2 OCTETS	0x886c (LINK CONTROL FRAME)
SSTYPE	1 OCTET	=2
SSLENGTH	1 OCTET	NUMBER OF ADDITIONAL OCTETS IN THE CONTROL HEADER, STARTING WITH THE SSVERSION FIELD AND ENDING WITH THE SECOND(LAST) OCTET OF THE NEXT ETHERTYPE FIELD. MINIMUM IS 4 FOR SSVERSION 0.
SSVERSION	1 OCTET	=0
LI_PAD	1 OCTET	IGNORED ON RECEPTION.
NEXT ETHERTYPE	2 OCTETS	=0
PAD	41 OCTETS	ANY VALUE OCTET
FCS	4 OCTETS	

FIG.45

FIELD	LENGTH	MEANING
DA	6 OCTETS	DESTINATION ADDRESS(FF.FF.FF.FF.FF.FF)
SA	6 OCTETS	SOURCE ADDRESS OF THE STATION THAT TRANSMITTED THIS FRAME
ETHERTYPE	2 OCTETS	0x886c (LINK CONTROL FRAME)
SSTYPE	1 OCTET	=3
SSLENGTH	1 OCTET	NUMBER OF ADDITIONAL OCTETS IN THE CONTROL HEADER, STARTING WITH THE SSVERSION FIELD AND ENDING WITH THE SECOND(LAST) OCTET OF THE NEXT ETHERTYPE FIELD. MINIMUM IS 32 FOR SSVERSION 0.
SSVERSION	1 OCTET	=0
CSA_ID_SPACE	1 OCTET	IDENTIFIES THE REGISTRATION SPACE OF CSA_MFR_ID 0-UNSPECIFIED 1-JEDEC 2-PCI
CSA_MFR_ID	2 OCTETS	HW MANUFACTURER ID-IDENTIFIES THE MANUFACTURER OF THE PHY CONTROLLER CHIP. THE PURPOSE OF THIS FIELD PLUS THE PART NUMBER AND REVISION IS TO IDENTIFY SPECIFIC IMPLEMENTATIONS OF THE PHY SPECIFICATION. THIS IS NOT A BOARD OR ASSEMBLY-LEVEL IDENTIFIER.
CSA_PART_NO	2 OCTETS	HW MANUFACTURER PART NUMBER-THE PART NUMBER OF THE PHY CONTROLLER CHIP.
CSA_REV	1 OCTET	HW REVISION
CSA_OPCODE	1 OCTET	0-ANNOUNCE 1-REQUEST
CSA_MTU	2 OCTETS	MAXIMUM SIZE LINK-LEVEL PDU THIS RECEIVER ACCEPTS IN OCTETS, THE DEFAULT VALUE IS 1526 OCTETS. THIS IS ALSO THE MINIMUM VALUE THAT SHALL BE ACCEPTED BY ALL ILINE10 STATIONS.
CSA_SA	6 OCTETS	SOURCE ADDRESS OF THE STATION THAT GENERATED THIS CSA FRAME
CSA_PAD	2 OCTETS	RESERVED FOR VERSION 0. SHALL BE SENT AS 0, IGNORED ON RECEPTION.
CSA_CURRENTTXSET	4 OCTETS	CONFIGURATION FLAGS, PLUS ALL CURRENT IN-USE STATUS FOR THIS STATION.
CSA_OLDESTTXSET	4 OCTETS	A COPY OF THE "OLDEST" TX FLAGS FOR THIS STATIONS, FROM THE PERIOD ENDING AT LEAST ONE PERIOD (MINUTE) EARLIER.
CSA_CURRENTRXSET	4 OCTETS	THE UNION OF RECENT FLAGS RECEIVED FROM OTHER STATIONS.
NEXT ETHERTYPE	2 OCTETS	=0
PAD		PAD TO REACH MINFRAMESIZE IF NECESSARY
FCS	4 OCTETS	

Downloaded from www.bittorrent.org

Octet	Field	Length	Description
Flags0	TxPriority7	1	Station is(was) transmitting frames with LL priority 7. (always set)
	TxPriority6	1	Station is(was) transmitting frames with LL priority 6.
	TxPriority5	1	Station is(was) transmitting frames with LL priority 5.
	TxPriority4	1	Station is(was) transmitting frames with LL priority 4.
	TxPriority3	1	Station is(was) transmitting frames with LL priority 3.
	TxPriority2	1	Station is(was) transmitting frames with LL priority 2.
	TxPriority1	1	Station is(was) transmitting frames with LL priority 1.
	TxPriority0	1	Station is(was) transmitting frames with LL priority 0. (always set)
Flags1	Reserved	6	Shall be sent as 0 and ignored by 2.0 stations when received.
	No_VIM2_Frames	1	This station does not support the reception or transmission of compatibility frames (VIM2 frames).
Flags2 Flags3	Supports 4Mbaud	1	This station supports 4 megabaud payload encodings.
	Reserved	8	Shall be sent as 0 and ignored by 2.0 stations when received.
	ConfigV2	1	Force use of 10M8 mode, defers to Config1 and ConfigVIM2.
	ConfigVIM2	1	Force use of VIM2 mixed mode, defers to ConfigV1.
	ConfigV1	1	Force use of HPNA 1.x mode, highest precedence of config flags.
	Reserved	2	Shall be sent as 0 and ignored by 2.0 stations when received.
	Highest Version	3	This station's highest supported HPNA version:
			0x000 – Reserved 0x001 – HPNA1.0 0x010 – iLine10 0x011-0x111 Reserved

Fig. 46

DeleteSet	A computed value used to detect newly removed status information.
NewRxFlags, ReallyNewRxFlags	Computed values used to detect new status flags.

Fig. 47

CSP_Timer	A free-running timer with a period of 60 seconds.
RetransmitTimer	A one-shot timer, set to a random interval in the range 1 ms to 1000 ms, inclusive, after sending a CSA in which CSA_CurrentTxSet and CSA_OldestTxSet are different, or when a CSA is received with the CSA_Opcode set to 1 (Request). This timer is cancelled if a second CSA is sent as a result of the CSP_Timer expiring.

Fig. 48

NewTxSet	The set of flags announced during the current CS period, updated immediately when a new link layer priority is used or new volatile status is set. When the CSP_Timer expires, CurrentTxSet is given the value of NewTxSet, and NewTxSet is reset to the default set.
PreviousTxSet	The set of flags that were announced during the previous CS period (the ending value of NewTxSet from the previous CS period).
OldestTxSet	The set of flags rolled over from PreviousTxSet at the end of the previous CS period (the value of PreviousTxSet from the previous CS period). Flags that are present in OldestTxSet and missing from PreviousTxSet were not actively used or detected (by the sender) for an entire CS period, and will be deleted. This set is sent in CSA frames as CSA_OldestTxSet.
NewRxSet	<p>The union of all CSA_CurrentTxSet flags received in CSAs from other stations during the current CS period. This is rolled over into PreviousRxSet at the expiration of the CSP_Timer, then reset to the empty set (0).</p> <p>A volatile status flag (one of the priority flags) in this set may subsequently be deleted if the only station previously announcing that flag stops using it. The deletion from that station's CurrentTxSet is noted by the difference from its OldestTxSet. The fact that it was the only sender is noted by the absence of the flag in that station's CurrentRxSet, indicating that it has received the flag from no other stations.</p> <p>If deleted from NewRxSet, a flag shall also be deleted from PreviousRxSet.</p>
PreviousRxSet	The set of announced flags received during the previous CS period (the ending value of NewRxSet from the previous CS period). A flag may be deleted from this set, as described under NewRxSet above.

Fig. 49

CurrentTxSet	The set of flags that were announced during the previous CS period plus any new status and priority flags (or changed configuration/options flags) used during the current CS period, i.e. the union of PreviousTxSet and NewTxSet. This set is sent in CSA frames as CSA_CurrentTxSet.
CurrentRxSet	The union of NewRxSet, PreviousRxSet. This set is sent in CSA frames as CSA_CurrentRxSet.
CurrentInUseSet	The union of CurrentTxSet and CurrentRxSet. This set is used to determine the operational mode of the station and to modify the mapping between the LL priority of the frame and the actual PHY priority usage.

Fig. 50

FIG.51a

FIG. 51a

TX LL PRIORITY																															
0				1		2		3		4		5		6		7															
DEFAULT TX PHY PRIORITIES																															
CURRENTINUSE PRIORITIES (ANY)																															
A		N		Y		T		X		S		E		T		2		0		1		3		4		5		7		6	

FIG.51b

FIG. 51b

TX LL PRIORITY															
0		1		2		3		4		5		6		7	
REMAPPED TX PHY PRIORITIES															
CURRENTINUSE PRIORITIES (LL)															
0							7	6	5	6	6	6	6	7	
0						6	7	5	4	4	5	5	7	6	
0	1				4		7	5	4	4	5	6	7	7	
0			3		5	6	7	3	2	2	4	4	5	7	6

FIG.52c

FIELD	LENGTH	MEANING
DA	6 OCTETS	DESTINATION ADDRESS (FROM ORIGINAL ETHERNET PDU)
SA	6 OCTETS	SOURCE ADDRESS (FROM ORIGINAL ETHERNET PDU)
ETHERTYPE	2 OCTETS	0x886c (LINK CONTROL FRAME)
SSTYPE	1 OCTET	=4
SSLENGTH	1 OCTET	NUMBER OF ADDITIONAL OCTETS IN THE CONTROL HEADER, STARTING WITH THE SSVERSION FIELD AND ENDING WITH THE SECOND(LAST) OCTET OF THE NEXT ETHERTYPE FIELD. SSLENGTH IS 6 FOR SSVERSION 0.=6
SSVERSION	1 OCTET	=0
LARQ_HDR DATA	3 OCTETS	LARQ ENCAPSULATION HEADER DATA (WITH LARQ_CTL BIT=0)
NEXT ETHERTYPE	2 OCTETS	FROM ORIGINAL ETHERNET PDU
PAYLOAD	MIN 46 OCTETS	FROM ORIGINAL ETHERNET PDU PAYLOAD
FCS	4 OCTETS	FRAME CHECK SEQUENCE

FIG.52d

OCTET	FIELD	LENGTH	MEANING
FLAGSO	LARQ_MULT	1 BIT	MULTIPLE RETRANSMISSION FLAG. 0 IN THE ORIGINAL TRANSMISSION OF A DATA FRAME. FOR RETRANSMITTED FRAMES (LARQ_RTX=1), SET TO THE VALUE OF LARQ_MULT IN THE NACK FRAME THAT CAUSED THE RETRANSMISSION. THIS CAN BE USED BY RECEIVERS TO MEASURE THE ROUND-TRIP TIMES ASSOCIATED WITH THE MISS/NACK/RECEIVE-RTX PROCESS.
	LARQ_RTX	1 BIT	0 FOR FIRST TRANSMISSION OF A FRAME, 1 IF FRAME IS RETRANSMITTED. STATIONS NOT IMPLEMENTING LARQ SHALL DROP ANY DATA FRAME IF THIS BIT IS 1.
	LARQ_NORTX	1 BIT	0 IF IMPLEMENTATION SUPPORTS RETRANSMISSION, 1 IF ONLY PRIORITY IS MEANINGFUL. MAY BE USED ON A PERCHANNEL BASIS.
	LARQ_NEWSEQ	1 BIT	1 IF THE SEQUENCE NUMBER SPACE FOR THE CHANNEL HAS BEEN RESET, AND OLDER SEQUENCE NUMBERS SHOULD NOT BE NACKED, 0 OTHERWISE.
	LARQ_CTL	1 BIT	"0" WHEN IN ENCAPSULATION FORMAT
	PRIORITY	3 BITS	LINK LAYER PRIORITY OF THIS FRAME
FLAGSI_SEQ0	RESERVED	4 BITS	RESERVED, SHALL BE 0
	LARQ_SEQ_HIGH	4 BITS	HIGH 4 BITS OF SEQUENCE NUMBER
SEQ1	LARQ_SEQ_LOW	8 BITS	LOW 8 BITS OF SEQUENCE NUMBER

FIG.52e

OCTET	FIELD	LENGTH	MEANING
FLAGSO	LARQ_MULT	1 BIT	MULTIPLE RETRANSMISSION FLAG. 0 IN THE FIRST NACK SENT FOR A GIVEN SEQUENCE NUMBER, 1 IN ALL RETRANSMITTED NACKS.
	LARQ_NACK	3 BITS	NACK COUNT IF 0 IN A LARQ CONTROL FRAME, THEN THIS IS A REMINDER.
	LARQ_CTL	1 BIT	SET TO 1 FOR LARQ CONTROL HEADER DATA FORMAT
	PRIORITY	3 BITS	LINK LAYER PRIORITY OF THIS FRAME
FLAGSI_SEQO	RESERVED	4 BITS	RESERVED, SHALL BE 0
	LARQ_SEQ_HIGH	4 BITS	HIGH 4 BITS OF SEQUENCE NUMBER
SEQ1	LARQ_SEQ_LOW	8 BITS	LOW 8 BITS OF SEQUENCE NUMBER

093067.080801

FIG.53

SEND SEQUENCE NUMBER	THE SEQUENCE NUMBER OF THE MOST RECENTLY TRANSMITTED DATA FRAME.
REMINDER TIMER INTERVAL	A FIXED INTERVAL. THE DEFAULT IS 50 MS. LOWER VALUES WILL INCREASE THE OVERHEAD OF REMINDERS ON NETWORK LOAD, WHILE HIGHER VALUES INCREASE THE LATENCY FOR END-OF-SEQUENCE FRAMES REQUIRING RETRANSMISSION. IMPLEMENTATIONS SHOULD NOT USE VALUES OUTSIDE OF THE RANGE 25-75 MS, BASED ON 150 MS MAXIMUM SAVE AND HOLD TIMES.
MINIMUM RETRANSMISSION INTERVAL	AN INTERVAL USED TO PREVENT TOO-FREQUENT RETRANSMISSIONS OF A SINGLE FRAME. MOST IMPORTANT FOR MULTICAST CHANNELS. THE DEFAULT IS 10 MS.
MAXIMUM SAVE LIMIT	THE MAXIMUM NUMBER OF FRAMES THAT WILL BE SAVED FOR A SINGLE LOGICAL CHANNEL. THIS IMPLEMENTATION DEPENDENT, AND VARIES WITH THE MAXIMUM FRAME RATE THE SENDER IS EXPECTED TO SUPPORT. VALUES OF 100 OR MORE CAN BE USEFUL FOR HIGH-SPEED APPLICATIONS SUCH AS VIDEO.
MAXIMUM SAVE INTERVAL	THE MAXIMUM TIME THAT THE SENDER WILL NORMALLY SAVE A FRAME FOR POSSIBLE RETRANSMISSION. THE DEFAULT IS 150 MS.

FIG.54

CURRENT SEQUENCE NUMBER	THE MOST RECENT SEQUENCE NUMBER RECEIVED IN A LARQ HEADER FOR THE CHANNEL, WHETHER IN A DATA FRAME OR A REMINDER CONTROL FRAME.
OLDEST MISSING SEQUENCE NUMBER	THE OLDEST SEQUENCE NUMBER FOR A FRAME NOT YET RECEIVED WHICH HAS NOT BEEN DECLARED LOST.
MAXIMUM HOLD INTERVAL	THE LONGEST INTERVAL THAT A FRAME WILL BE HELD AWAITING AN EARLIER MISSING FRAME. THE DEFAULT IS TO USE THE SAME VALUE AS MAXIMUM SAVE INTERVAL, WHICH HAS A DEFAULT OF 150 MS.
MAXIMUM RECEIVE LIMIT	THE MAXIMUM NUMBER OF FRAMES THAT A RECEIVER WILL BUFFER WHILE AWAITING AN EARLIER MISSING FRAME. THE DEFAULT SHOULD NORMALLY BE THE SAME AS THE MAXIMUM SAVE LIMIT.
NACK RETRANSMISSION INTERVAL	THE INTERVAL AFTER WHICH A RECEIVER WILL RETRANSMIT A NACK CONTROL FRAME FOR A MISSING SEQUENCE NUMBER, WITH THE EXPECTATION THAT EARLIER NACK CONTROL FRAMES OR DATA FRAME RETRANSMISSIONS WERE LOST. THE DEFAULT FOR FIXED IMPLEMENTATIONS IS 20 MS.

1. The first part of the document is a list of names and their corresponding addresses. The names are listed in a column on the left, and the addresses are listed in a column on the right. The names are: John Doe, Jane Smith, Robert Brown, Mary White, and David Green. The addresses are: 123 Main St, 456 Elm St, 789 Oak St, 101 Pine St, and 202 Cedar St.

2. The second part of the document is a table with two columns. The first column is labeled "Name" and the second column is labeled "Address". The table contains the same data as the first part of the document.

3. The third part of the document is a list of names and their corresponding addresses. The names are listed in a column on the left, and the addresses are listed in a column on the right. The names are: John Doe, Jane Smith, Robert Brown, Mary White, and David Green. The addresses are: 123 Main St, 456 Elm St, 789 Oak St, 101 Pine St, and 202 Cedar St.

4. The fourth part of the document is a table with two columns. The first column is labeled "Name" and the second column is labeled "Address". The table contains the same data as the first part of the document.

5. The fifth part of the document is a list of names and their corresponding addresses. The names are listed in a column on the left, and the addresses are listed in a column on the right. The names are: John Doe, Jane Smith, Robert Brown, Mary White, and David Green. The addresses are: 123 Main St, 456 Elm St, 789 Oak St, 101 Pine St, and 202 Cedar St.

6. The sixth part of the document is a table with two columns. The first column is labeled "Name" and the second column is labeled "Address". The table contains the same data as the first part of the document.

7. The seventh part of the document is a list of names and their corresponding addresses. The names are listed in a column on the left, and the addresses are listed in a column on the right. The names are: John Doe, Jane Smith, Robert Brown, Mary White, and David Green. The addresses are: 123 Main St, 456 Elm St, 789 Oak St, 101 Pine St, and 202 Cedar St.

8. The eighth part of the document is a table with two columns. The first column is labeled "Name" and the second column is labeled "Address". The table contains the same data as the first part of the document.

9. The ninth part of the document is a list of names and their corresponding addresses. The names are listed in a column on the left, and the addresses are listed in a column on the right. The names are: John Doe, Jane Smith, Robert Brown, Mary White, and David Green. The addresses are: 123 Main St, 456 Elm St, 789 Oak St, 101 Pine St, and 202 Cedar St.

10. The tenth part of the document is a table with two columns. The first column is labeled "Name" and the second column is labeled "Address". The table contains the same data as the first part of the document.

FIELD	LENGTH	MEANING
DA	6 OCTETS	DESTINATION ADDRESS
SA	6 OCTETS	SOURCE ADDRESS
ETHERTYPE	2 OCTETS	0x886c (LINK CONTROL FRAME)
SSTYPE	1 OCTET	=5
SSLENGTH	1 OCTET	NUMBER OF ADDITIONAL OCTETS IN THE CONTROL HEADER, STARTING WITH THE SSVERSION FIELD AND ENDING WITH THE SECOND(LAST) OCTET OF THE NEXT ETHERTYPE FIELD. SSLENGTH SHALL BE >= 6 FOR SSVERSION 0.
SSVERSION	1 OCTET	=0
VENDOR OUI	3 OCTETS	AN IEEE ASSIGNED ORGANIZATIONALLY UNIQUE IDENTIFIER
CONTROL DATA	0-249 OCTETS	VENDOR SPECIFIC CONTROL DATA
NEXT ETHERTYPE	2 OCTETS	= NEXT ETHERTYPE IF AN ENCAPSULATION FORMAT, OR 0 IF NO ENCAPSULATED FRAME
PAD	0-38 OCTETS	ANY VALUE OCTET
FCS	4 OCTETS	

FIG. 55b

FIELD	LENGTH	MEANING
DA	6 OCTETS	DESTINATION ADDRESS
SA	6 OCTETS	SOURCE ADDRESS
ETHERTYPE	2 OCTETS	0x886c (LINK CONTROL FRAME)
LSTYPE	2 OCTETS	=32769
LSLENGTH	2 OCTETS	NUMBER OF ADDITIONAL OCTETS STARTING WITH THE LSVERSION FIELD AND ENDING WITH THE SECOND(LAST) OCTET OF THE NEXT ETHERTYPE FIELD. LSLENGTH SHALL BE>6 FOR LSVERSION 0.
LSVERSION	1 OCTET	=0
VENDOR OUI	3 OCTETS	AN IEEE ASSIGNED ORGANIZATIONALLY UNIQUE IDENTIFIER
CONTROL DATA	1-65531 OCTETS	VENDOR SPECIFIC DATA
NEXT ETHERTYPE	2 OCTETS	= NEXT ETHERTYPE IF AN ENCAPSULATION FORMAT, OR 0 IF NO ENCAPSULATED FRAME
PAD	40-0 OCTETS	IF NEEDED TO MAKE MINIMUM SIZE FRAME. SHOULD BE ZERO.
FCS	4 OCTETS	

FIG. 58

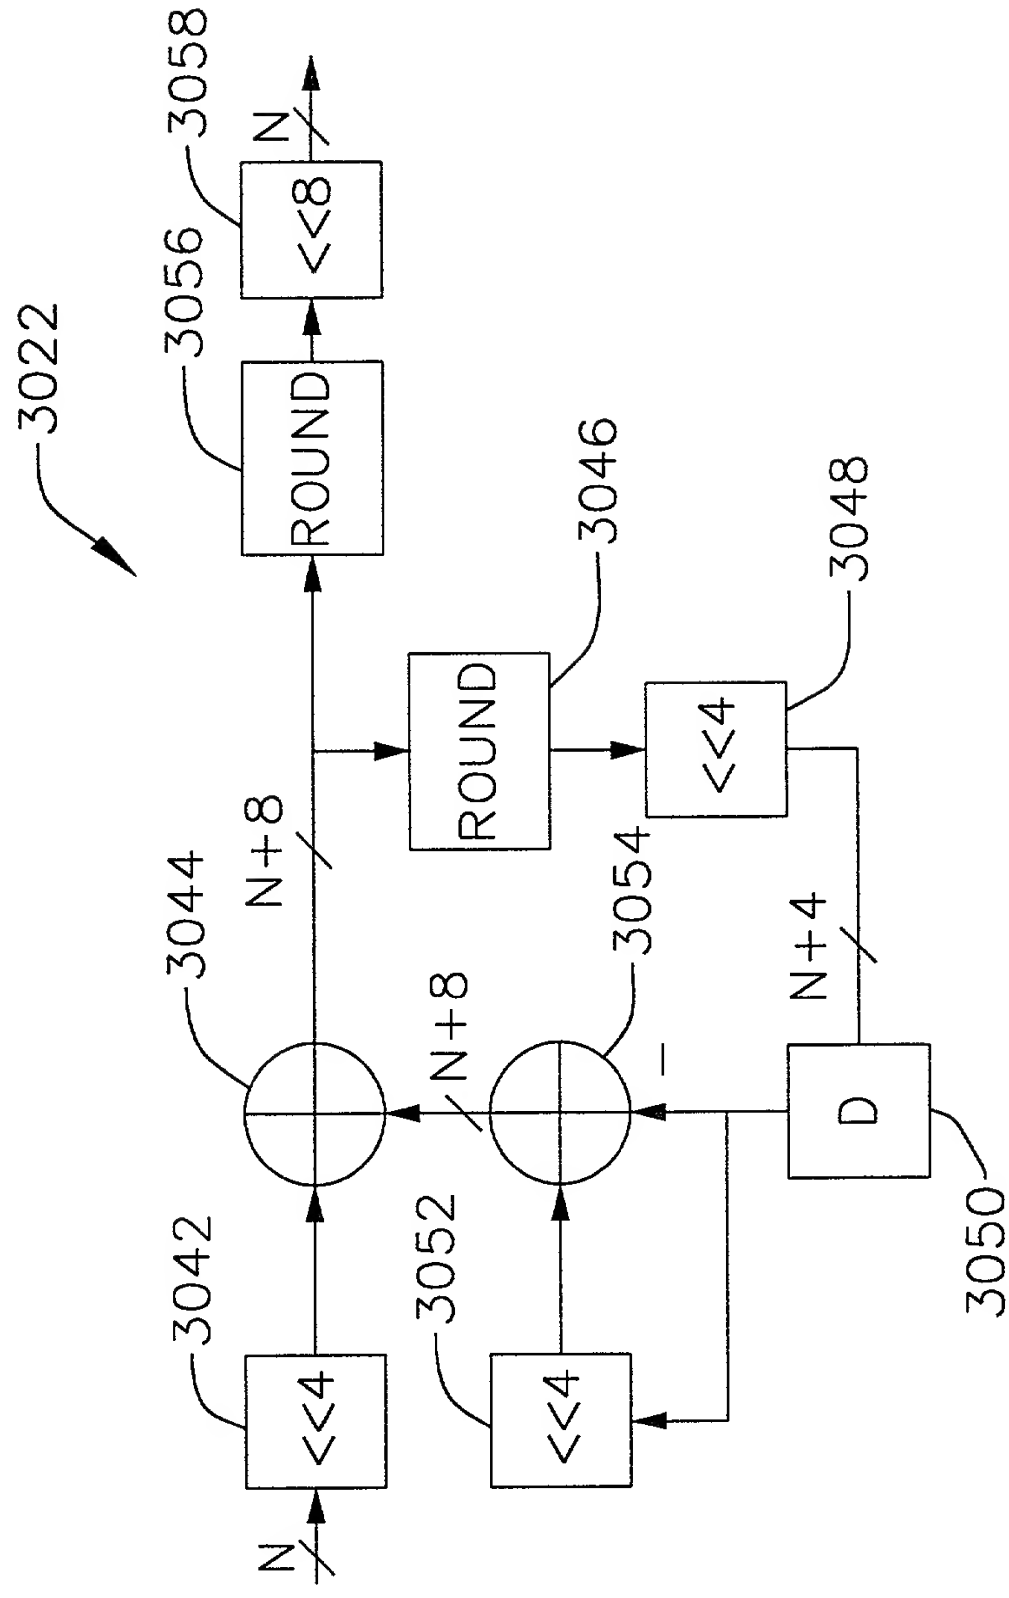


FIG. 59

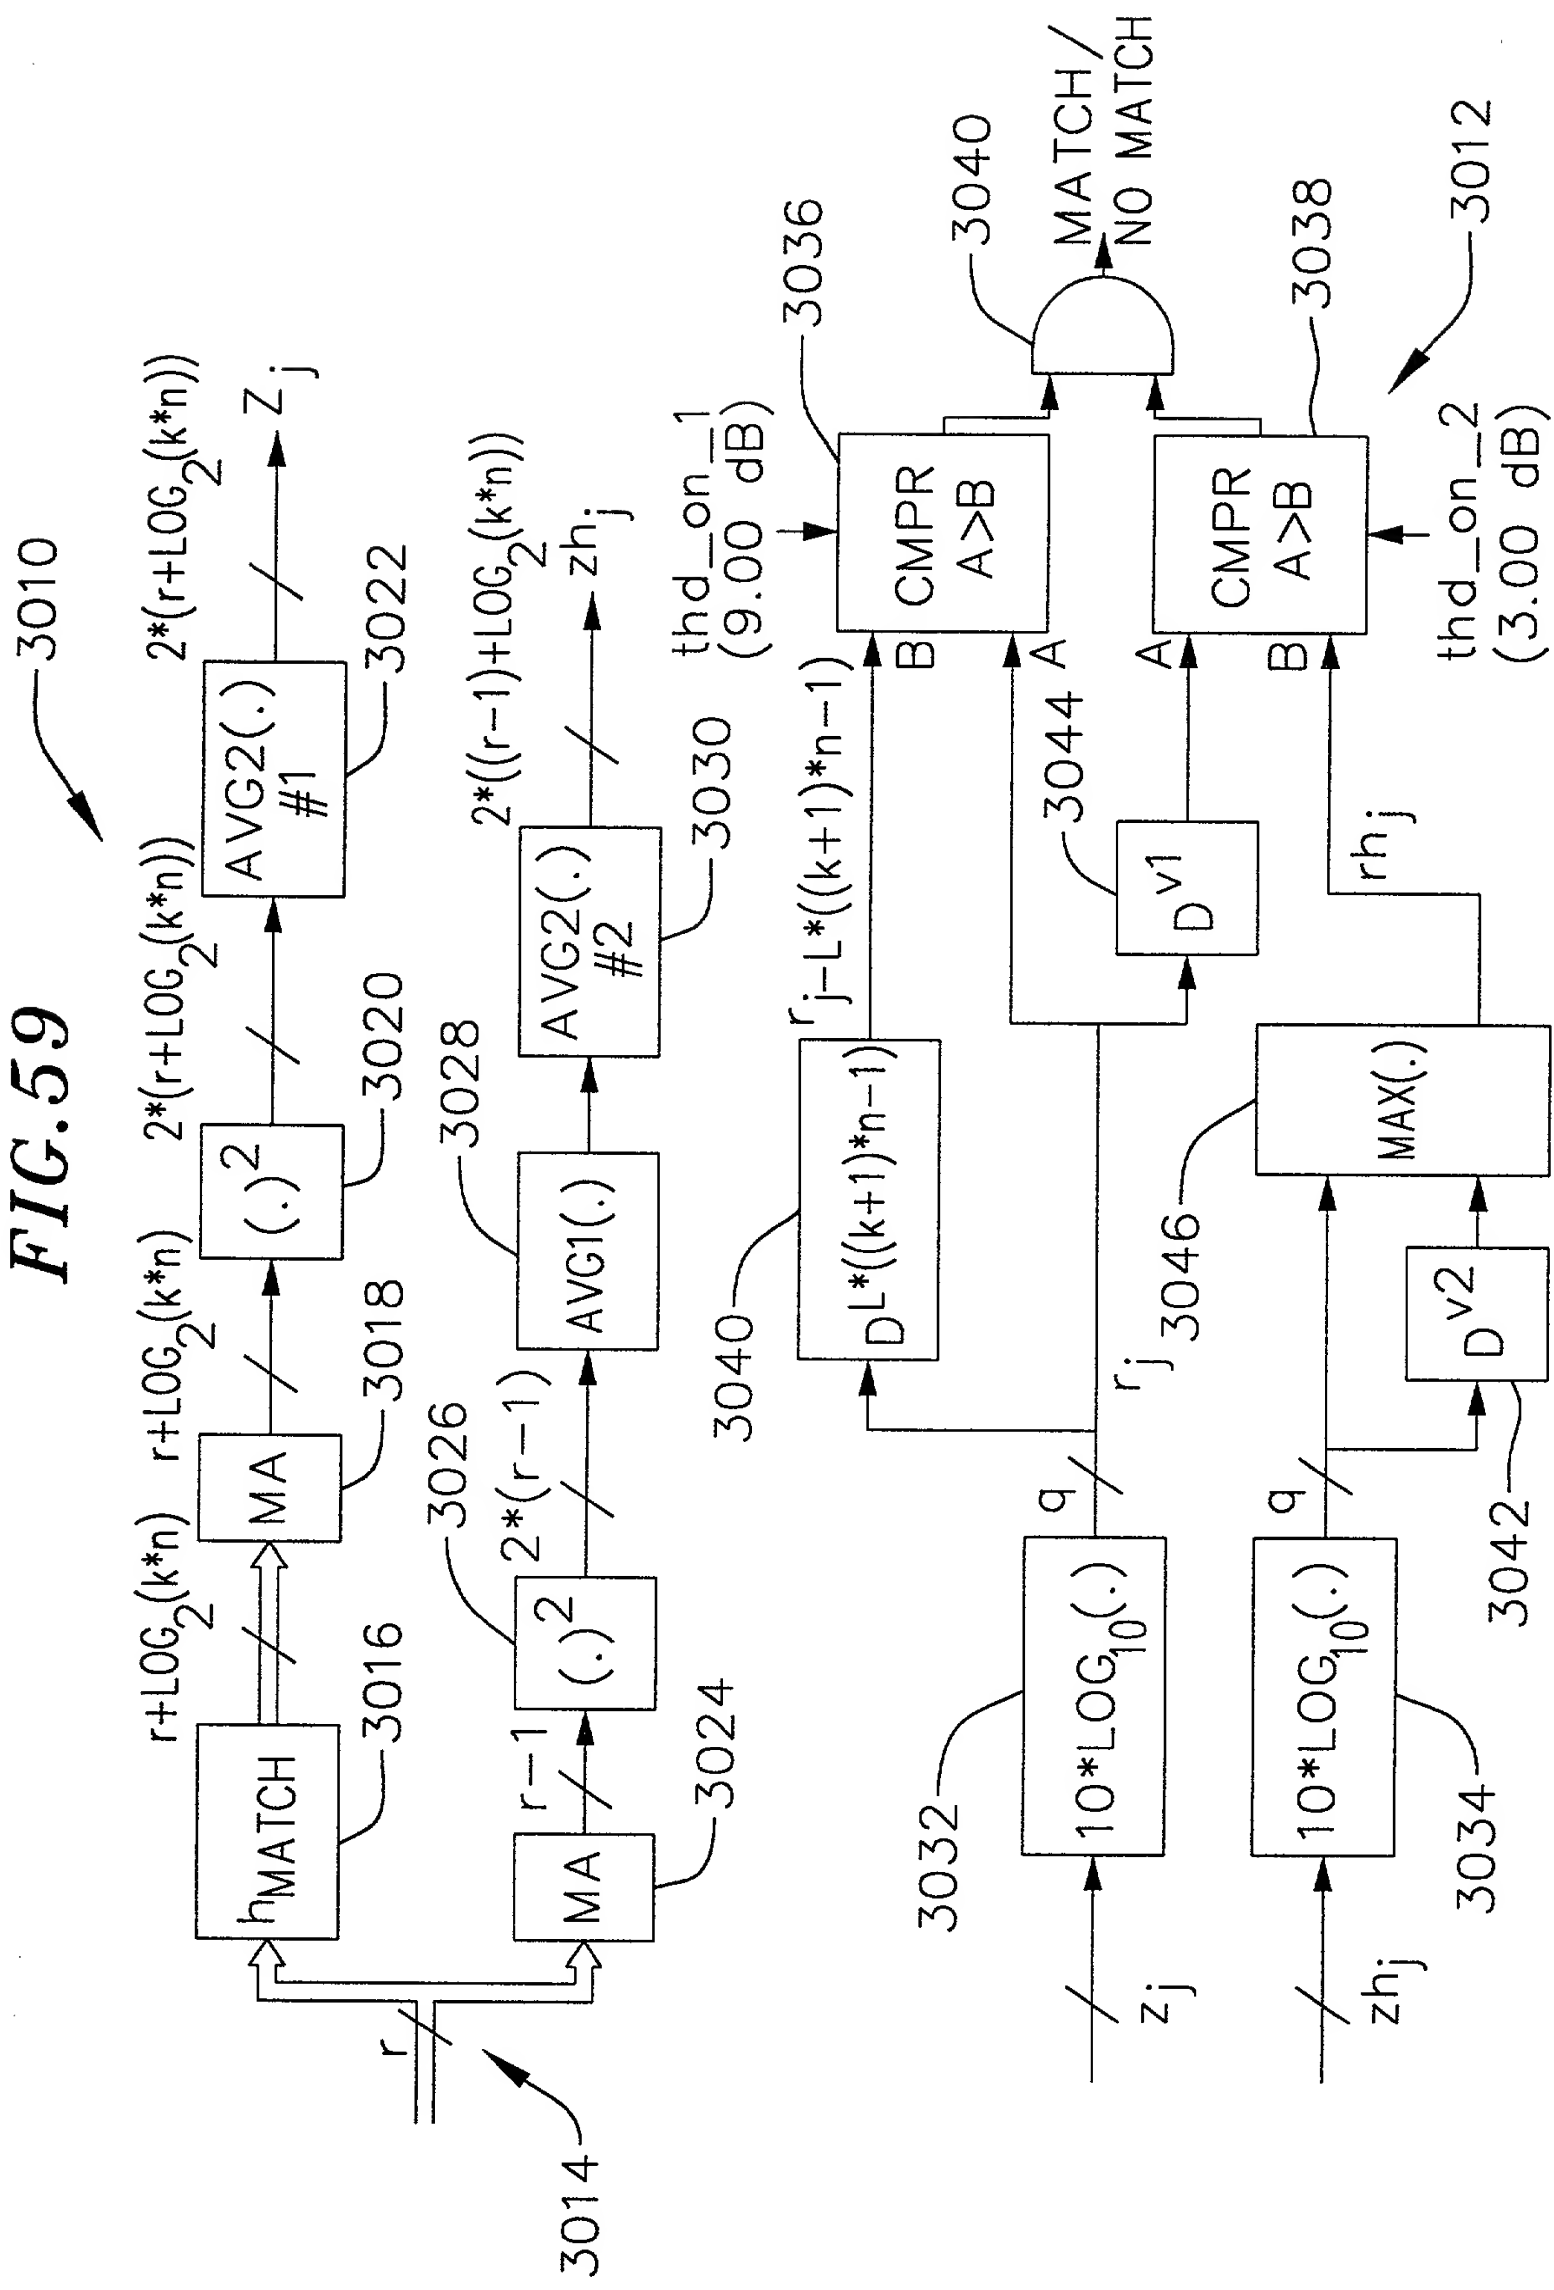


FIG. 62a

TABLE INDEX	TABLE VALUE (dB)
0	0.00
1	3.00
2	6.00
3	9.00
4	12.00
5	15.00
6	18.00
7	21.00
8	24.00
9	27.00
10	30.00
11	33.00
12	36.00
13	39.25
14	42.25
15	45.25
16	48.25
17	51.25
18	54.25
19	57.25
20	60.25
21	63.25
22	66.25
23	69.25
24	72.25
25	75.25
26	78.25
27	81.25
28	84.25
29	87.25
30	90.25
31	93.25

FIG. 62b

TABLE INDEX	TABLE VALUE (dB)
0	0.00
1	0.25
2	0.25
3	0.50
4	0.50
5	0.75
6	0.75
7	0.75
8	1.00
9	1.00
10	1.25
11	1.25
12	1.50
13	1.50
14	1.50
15	1.75
16	1.75
17	1.75
18	2.00
19	2.00
20	2.00
21	2.25
22	2.25
23	2.25
24	2.50
25	2.50
26	2.50
27	2.75
28	2.75
29	2.75
30	2.75
31	3.00

FIG. 63a

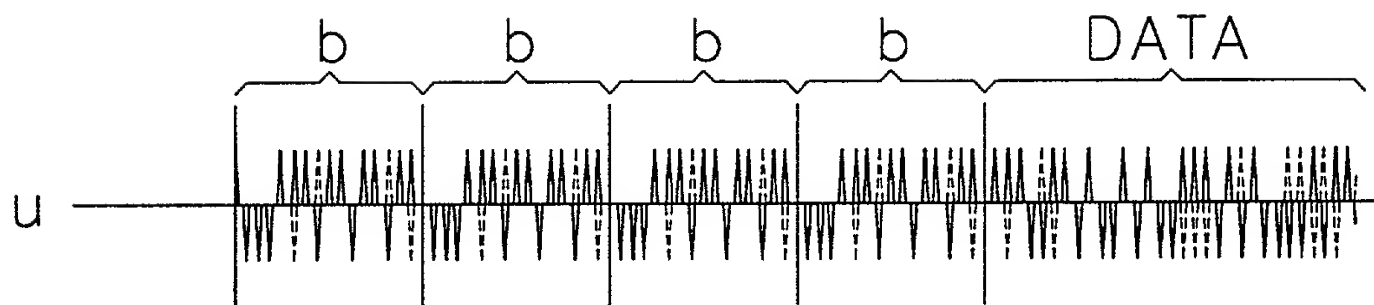


FIG. 63b



FIG. 63c

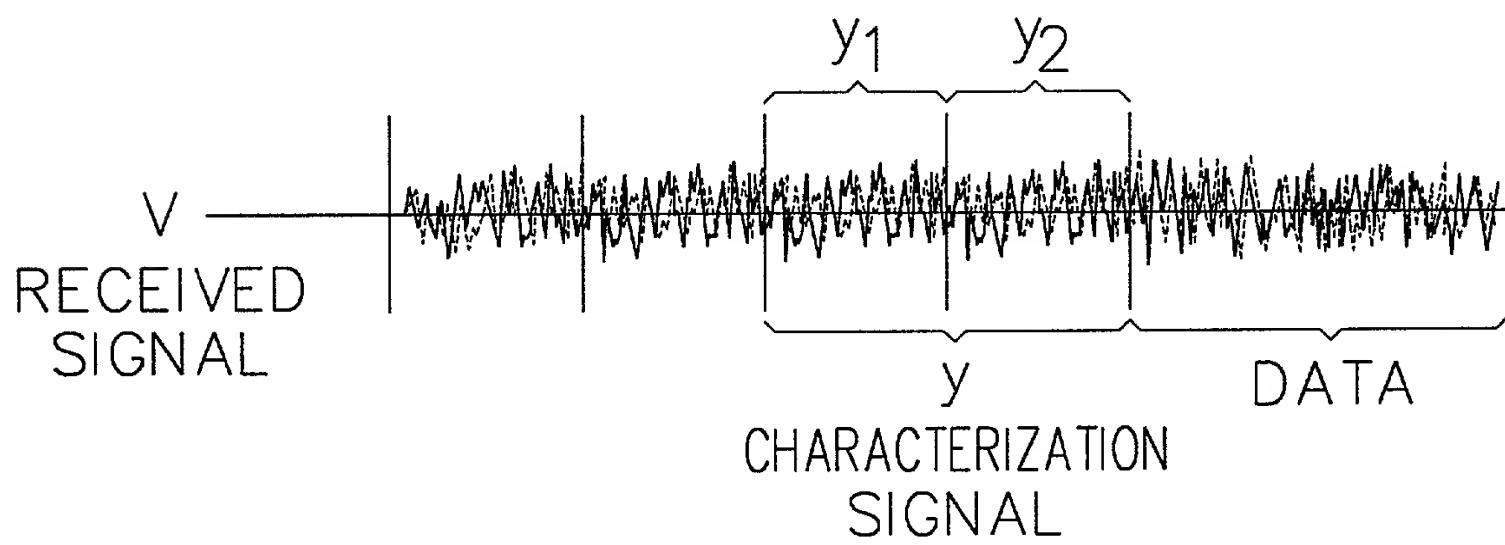


FIG. 64

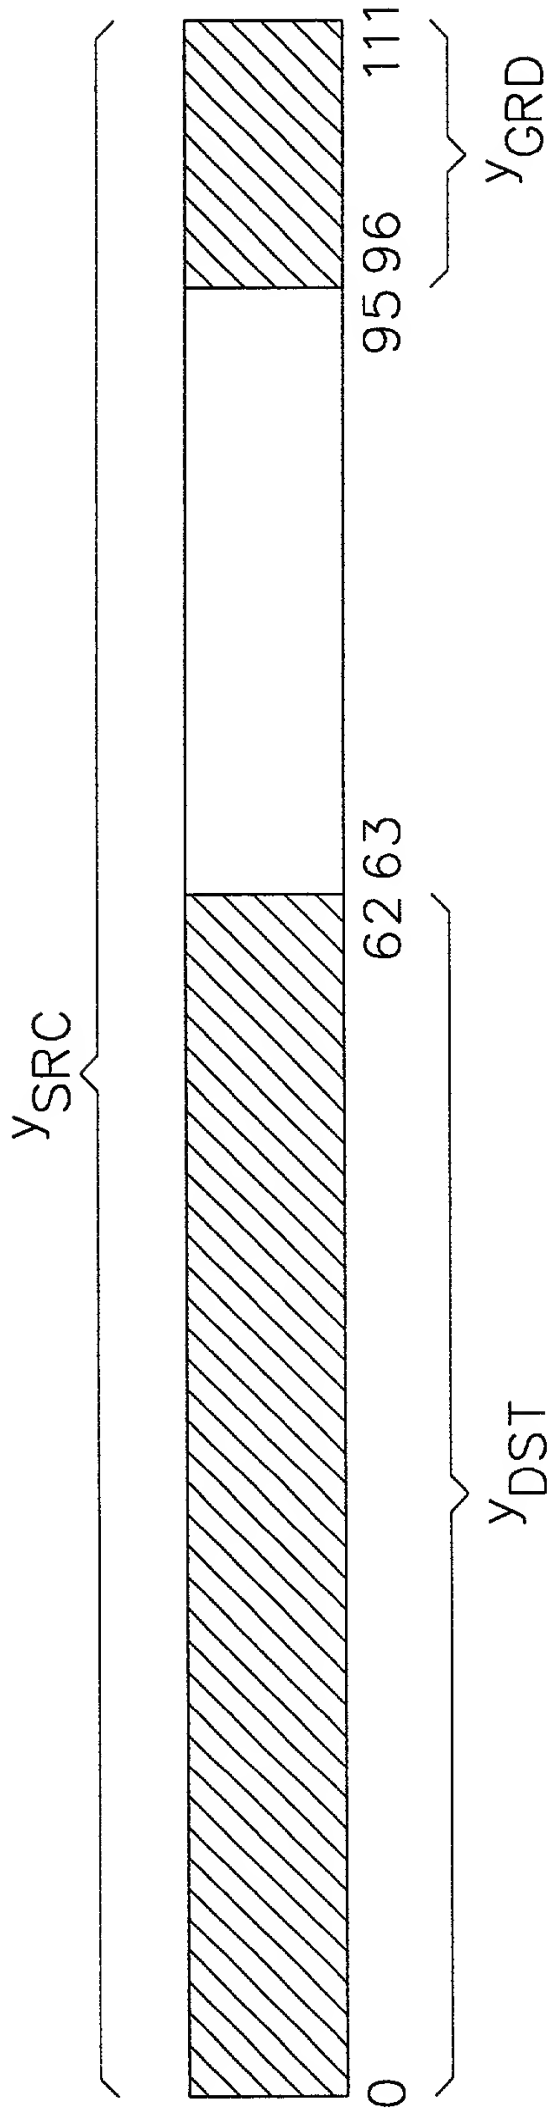


FIG. 65

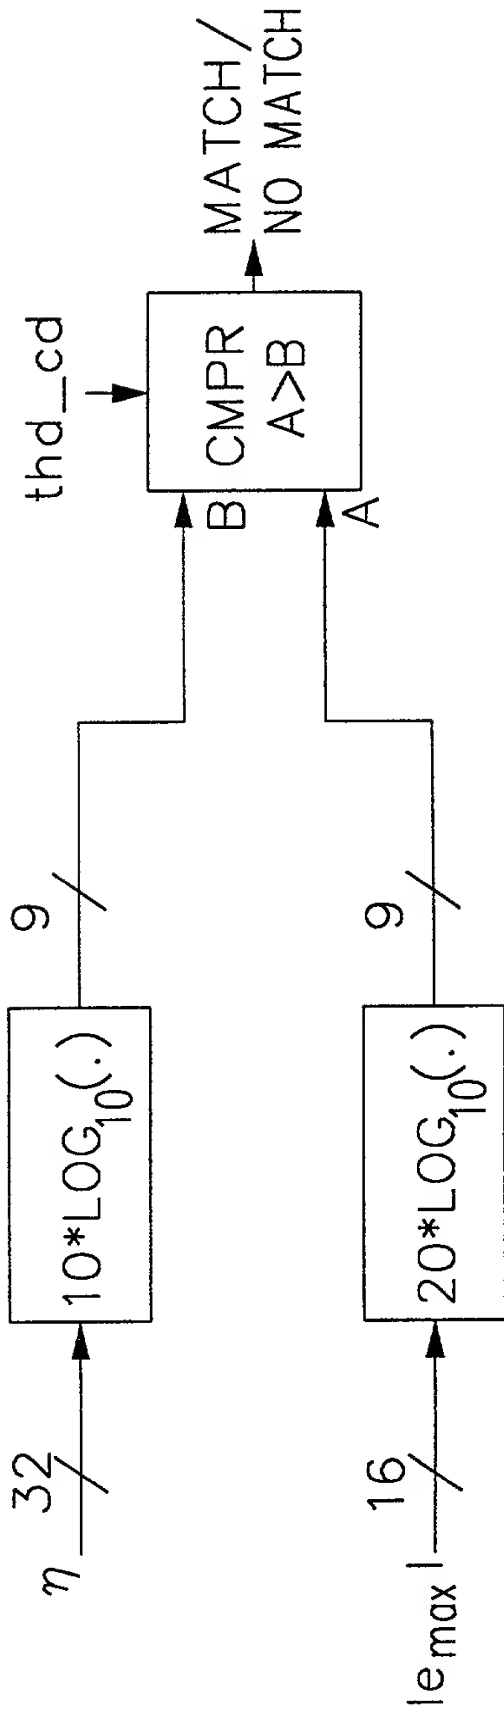


FIG. 66a

TABLE INDEX	TABLE VALUE
0	0.00
1	6.00
2	12.00
3	18.00
4	24.00
5	30.00
6	36.00
7	42.25
8	48.25
9	54.25
10	60.25
11	66.25
12	72.25
13	78.25
14	84.25
15	90.25

FIG. 66b

TABLE INDEX	TABLE VALUE
0	0.00
1	0.50
2	1.00
3	1.50
4	2.00
5	2.25
6	2.75
7	3.25
8	3.50
9	4.00
10	4.25
11	4.50
12	4.75
13	5.25
14	5.50
15	5.75

FIG. 67

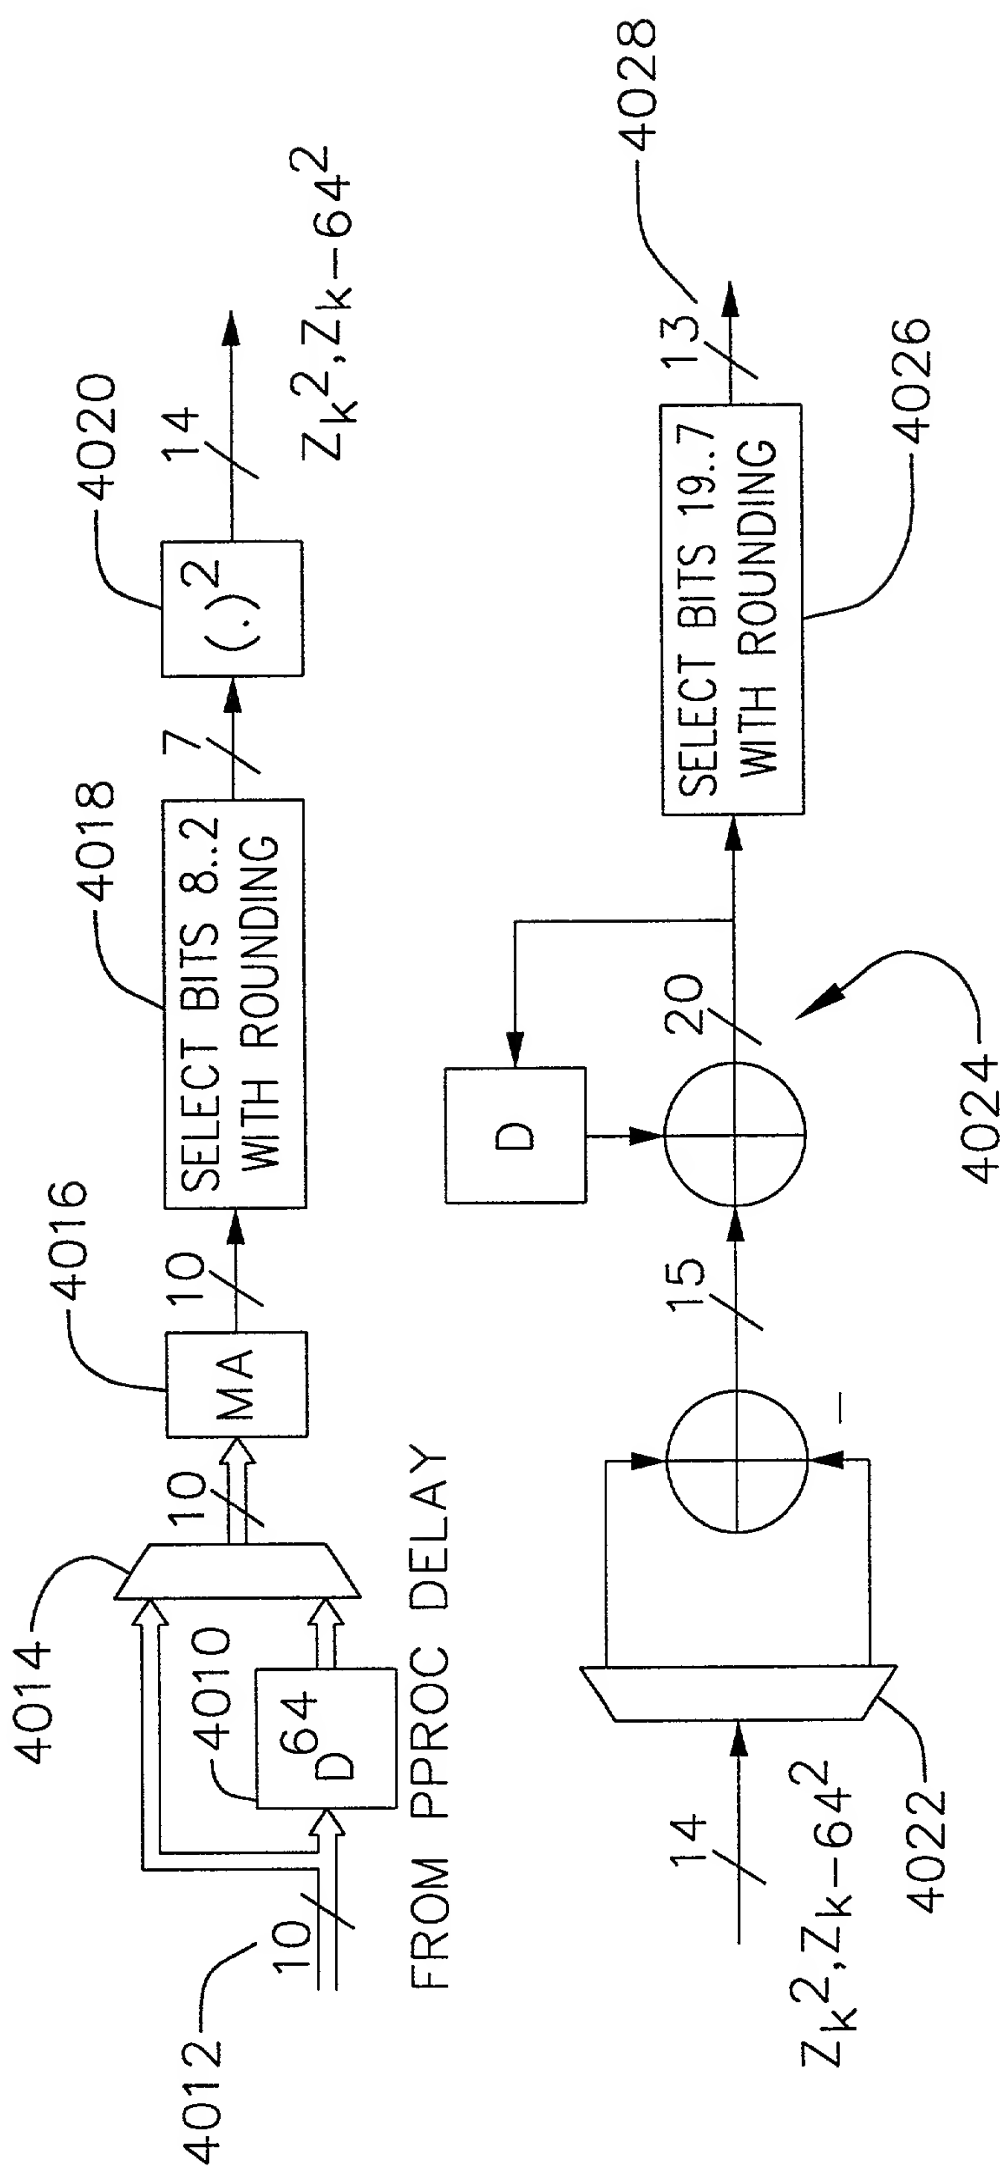


FIG. 68

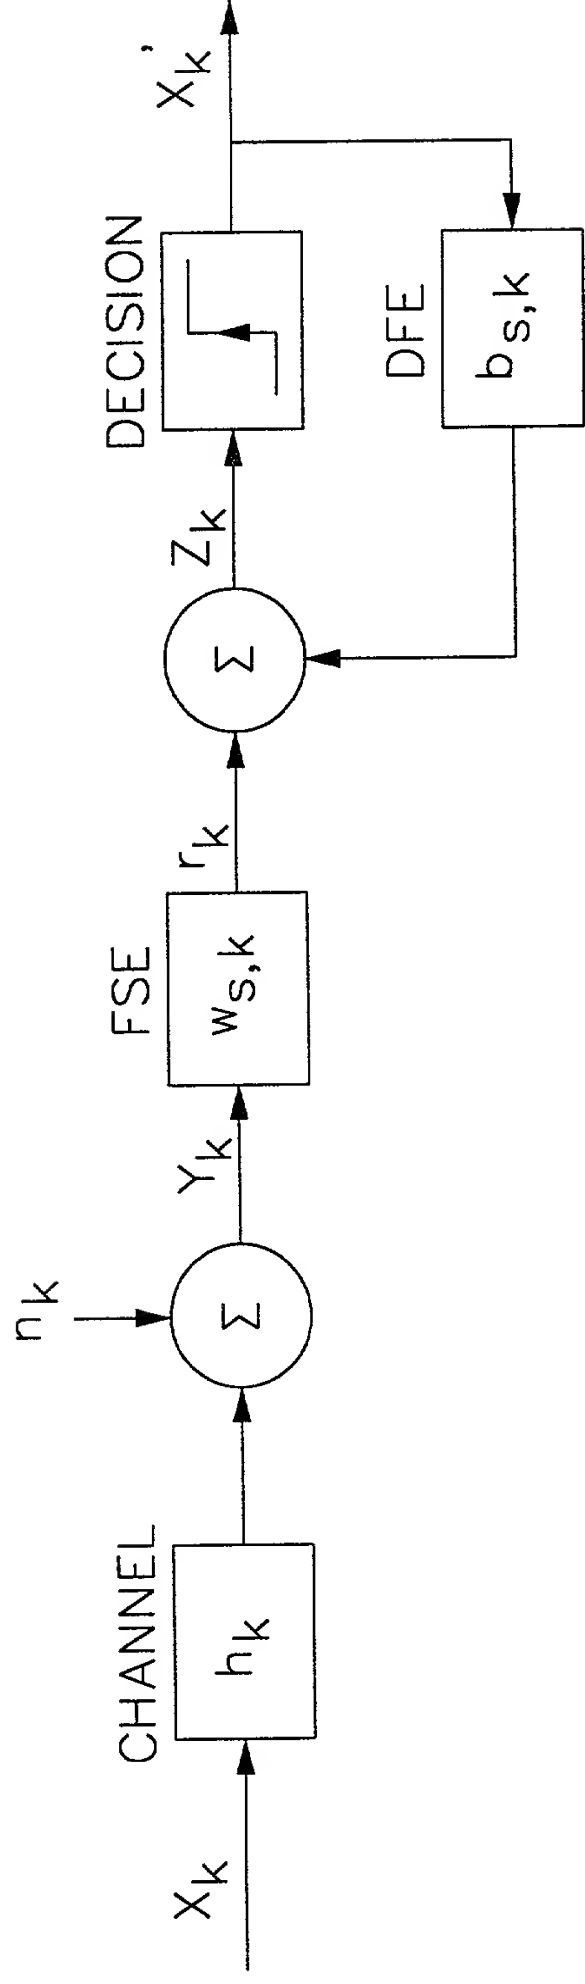
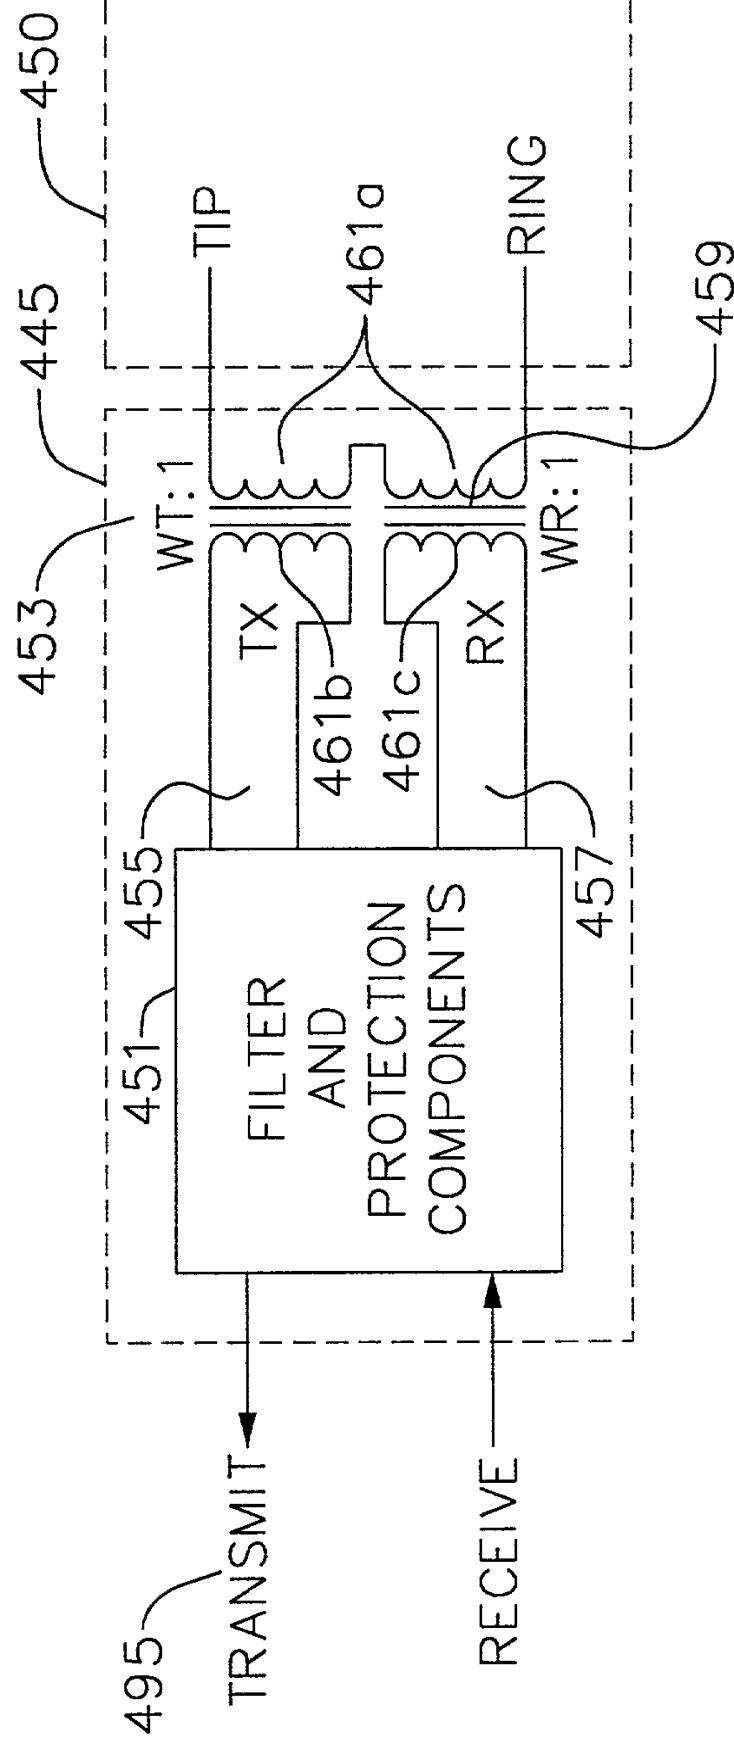
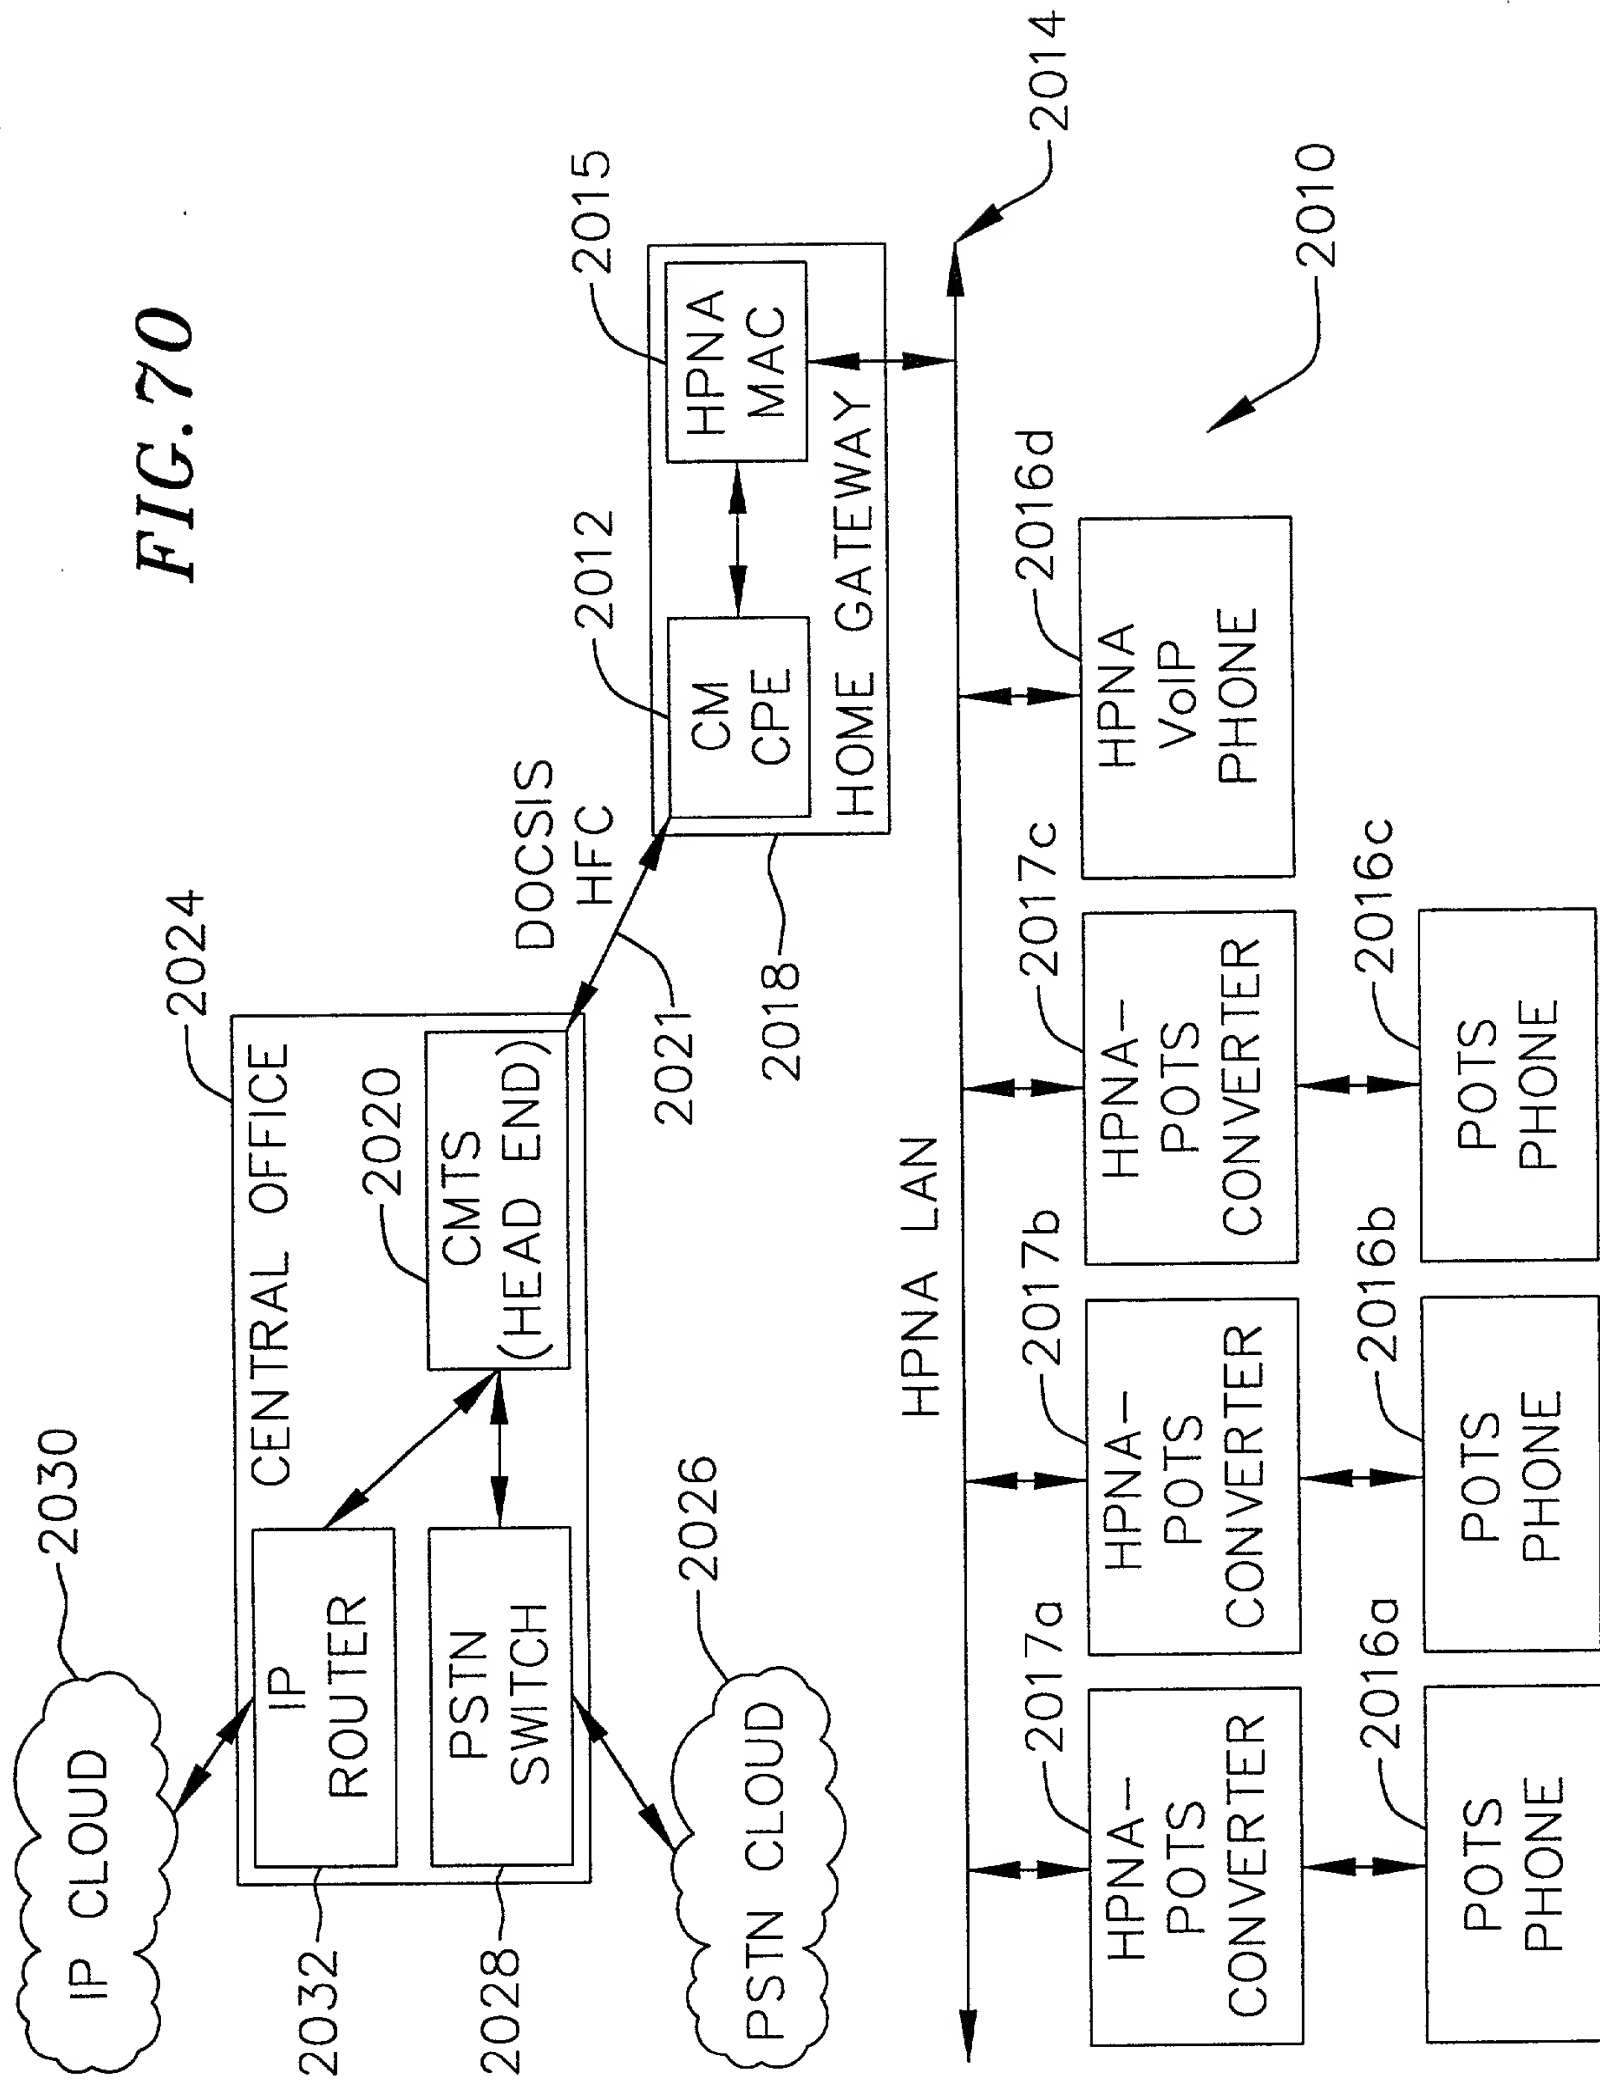


FIG. 69





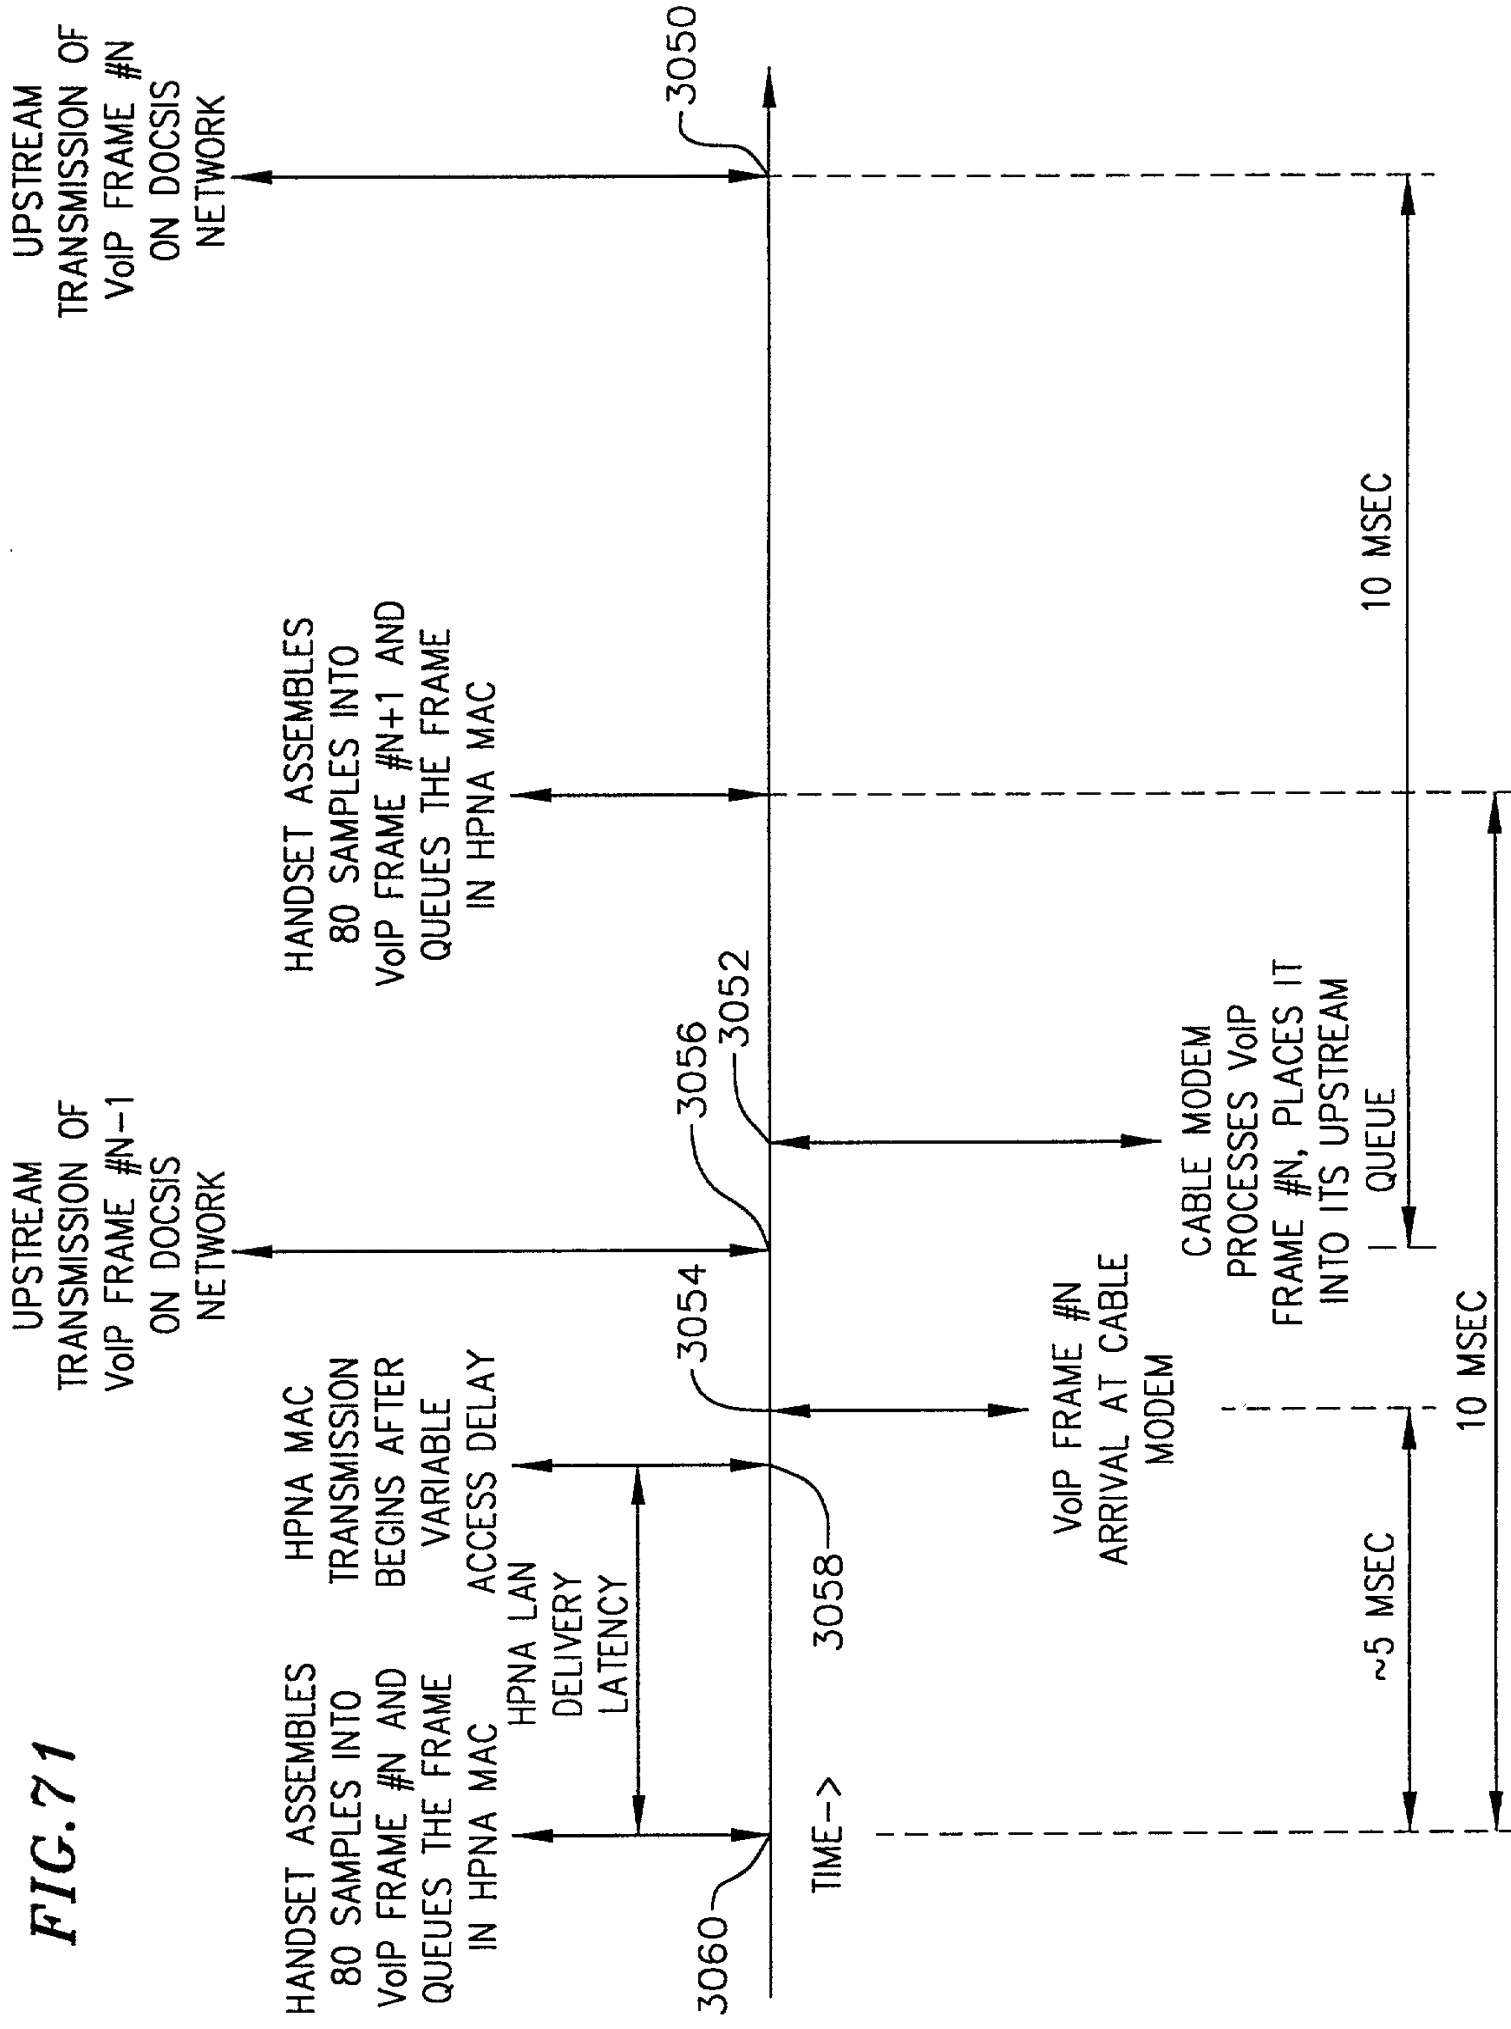


FIG. 72a

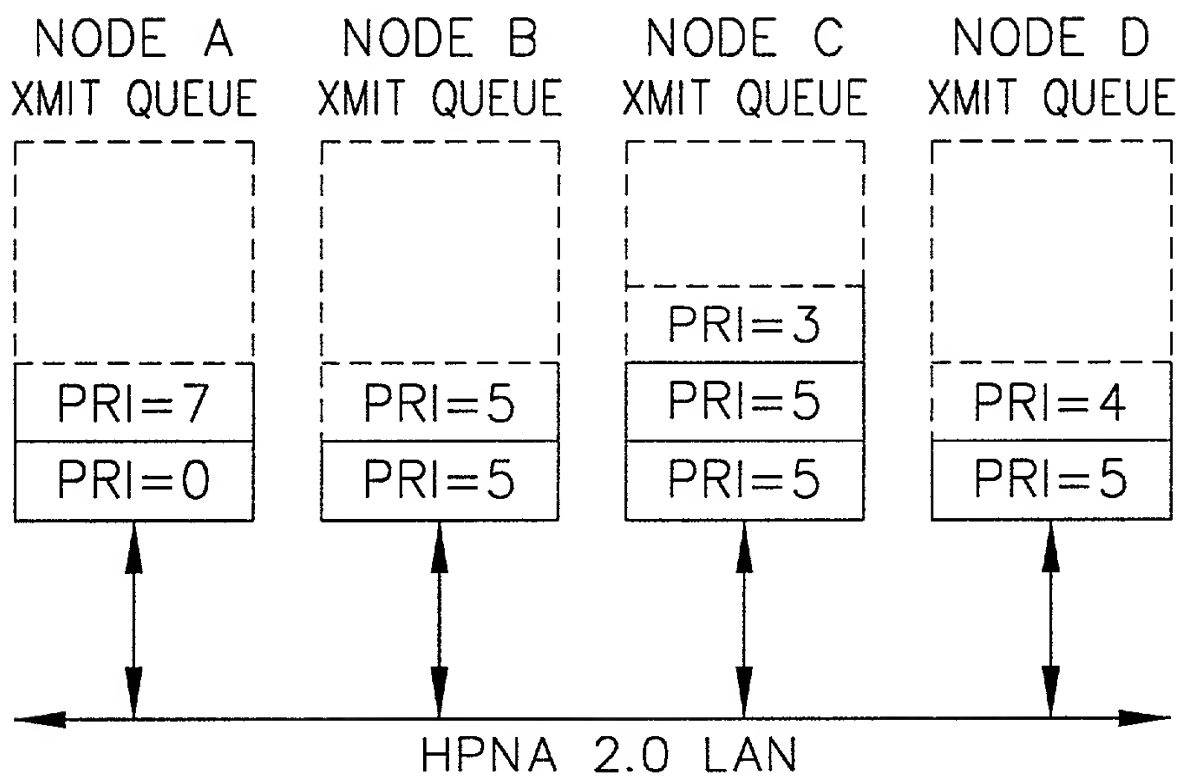


FIG. 72b

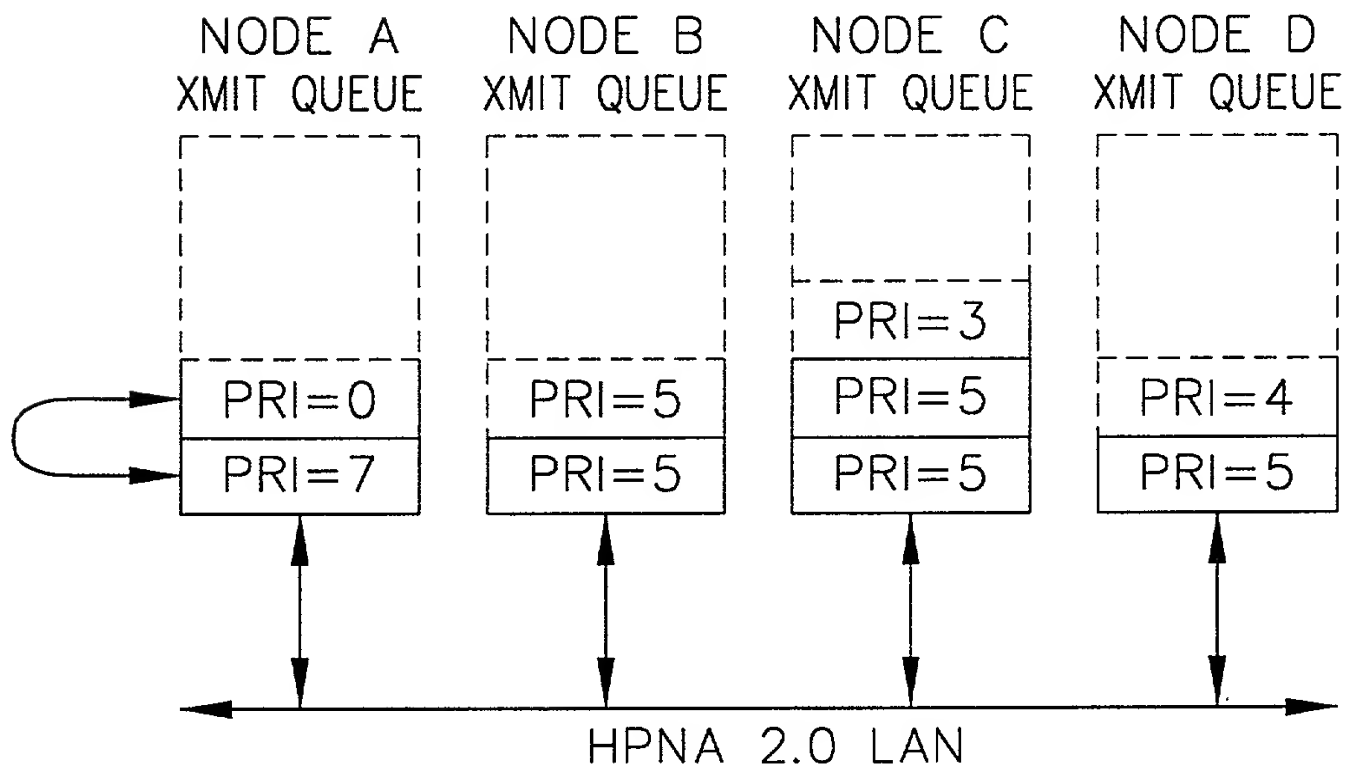


FIG. 73

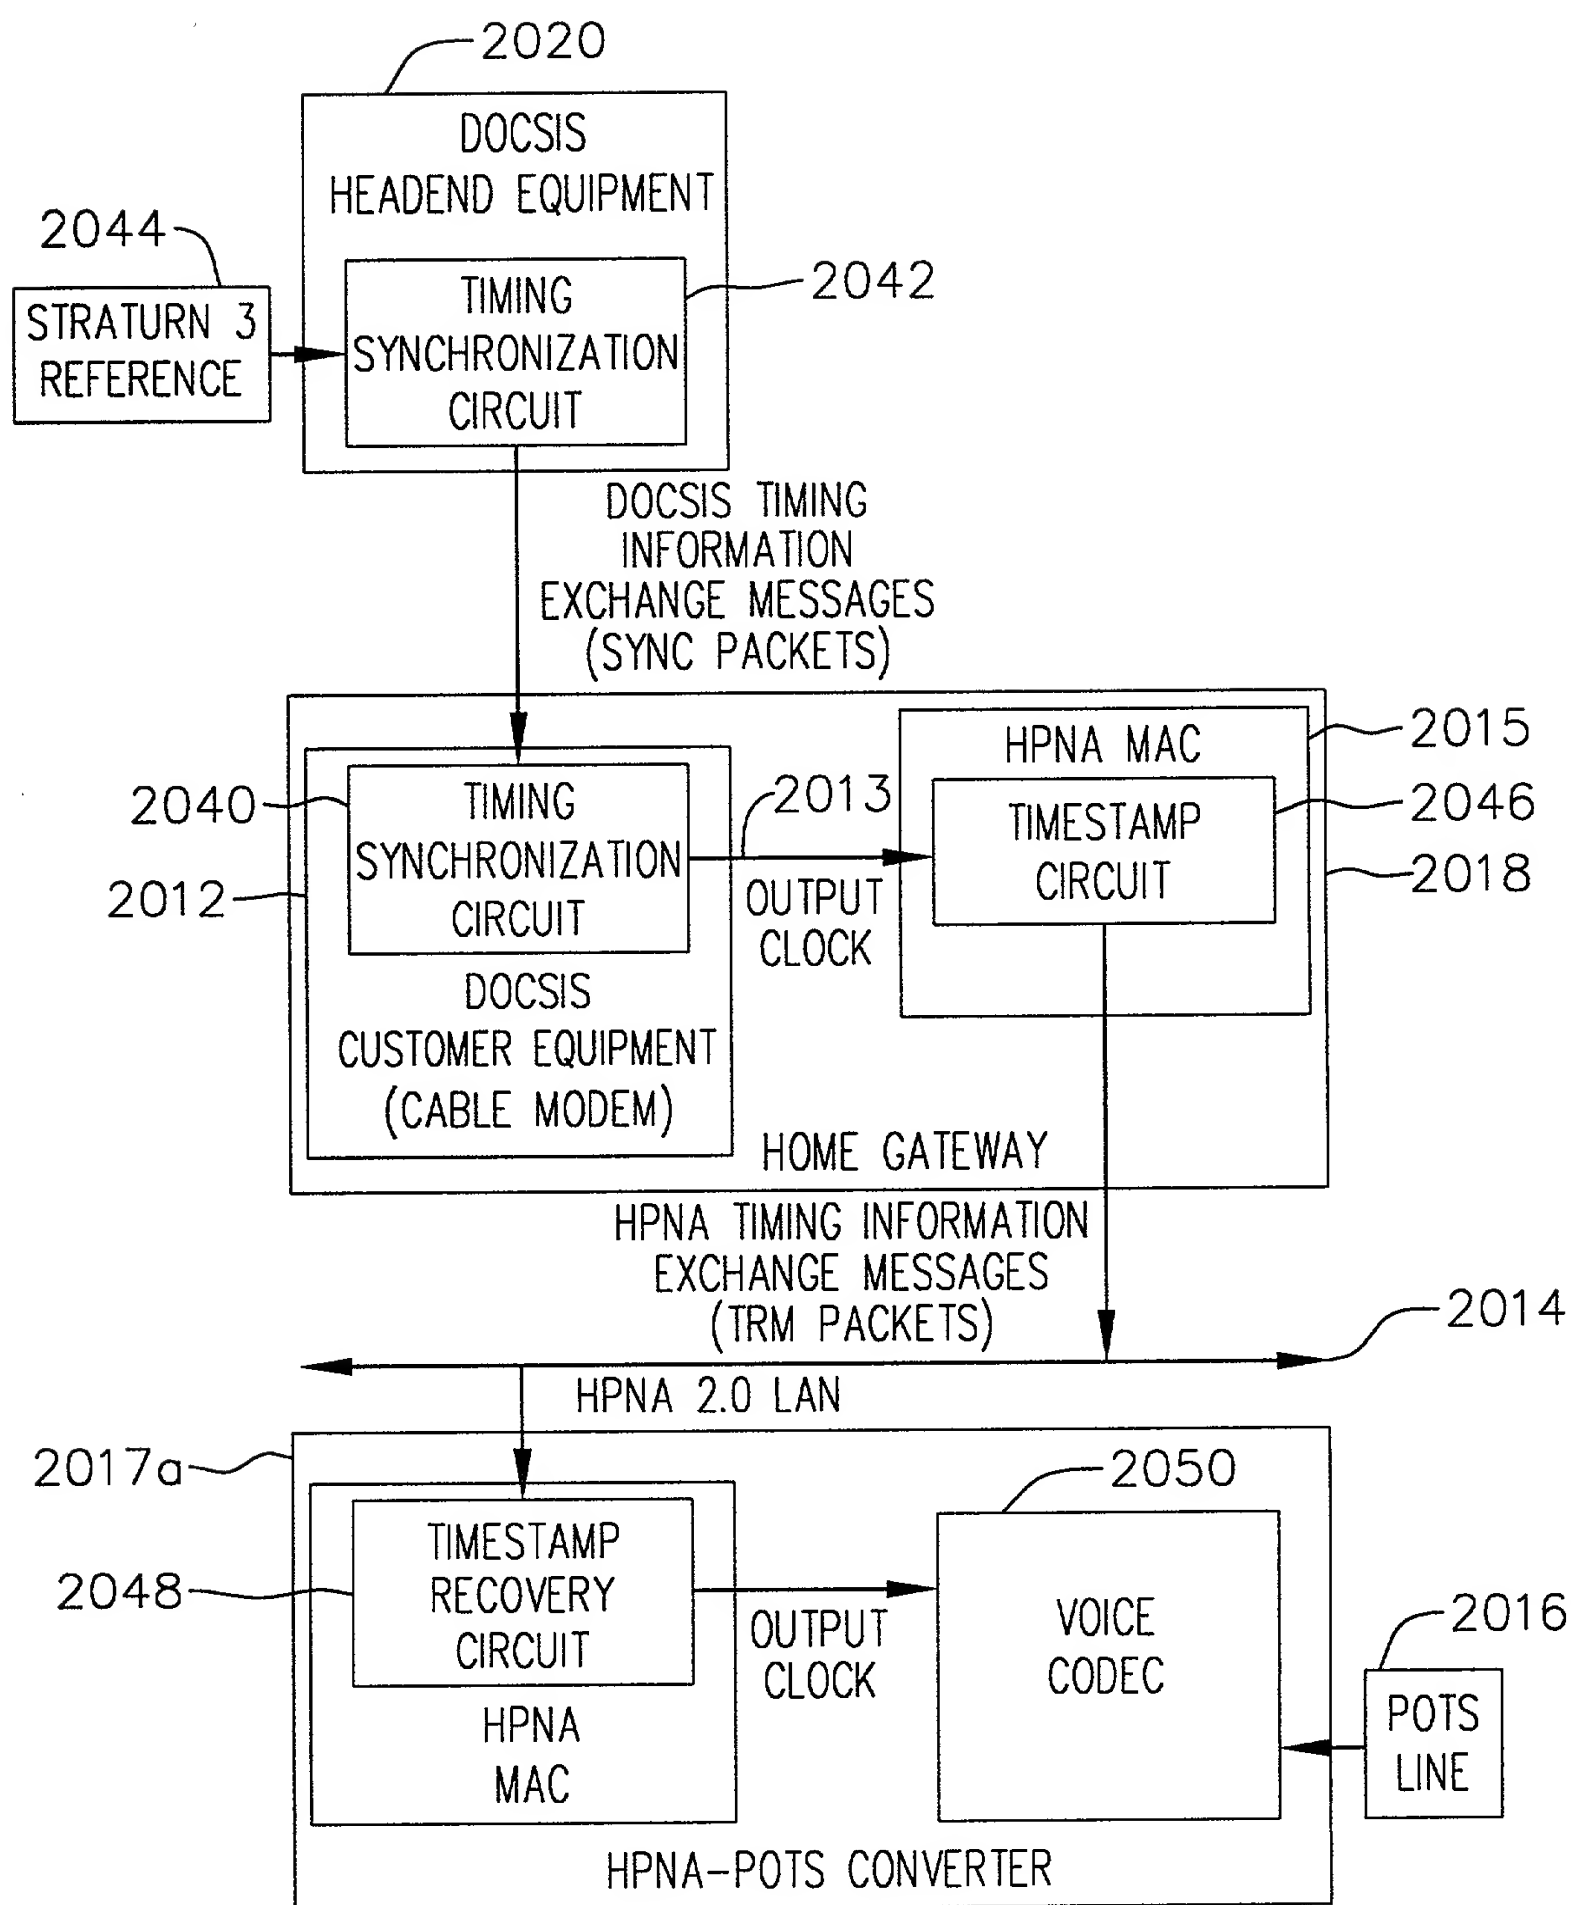


FIG.74

PARAMTER	UPSTREAM			DOWNSTREAM		
	"10E-6 CASE	91% CASE	90% CASE	"10E-6 CASE	91% CASE	90% CASE
ACCESS DELAY	3.1	1.3	1.3	3.1	1.3	1.3
COLLISION RESOLUTION	2.7	2.7	0.8	2.7	2.7	0.8
3 UP, 1 DOWN	2.1	1.0	1.0	2.1	1.0	1.0
LAST UP	0.5	0.3	0.3	0.5	0.3	0.3
COLLISION RESOLUTION	0.8	0.8	0.8	0.8	0.8	0.8
3 UP, 1 DOWN	2.1	1.0	1.0	2.1	1.0	1.0
LAST UP	0.5	0.3	0.3	0.5	0.3	0.3
3 DOWN				1.5	0.8	0.8
3 DOWN				1.5	0.8	0.8
TOTAL LATENCY	11.8	7.4	5.5	14.9	8.9	7.1

10E-6 CASE IS 10E-6 CRA ONCE OF TWO TRIES IN HOMES WITH MAXIMUM 4MBITS/SEC RAW RATE
91% CASE IS 10E-6 CRA ONCE OF TWO TRIES IN HOMES WITH MINIMUM 10MBITS/SEC RAW RATE
90% CASE IS 10E-1 CRA TWICE IN TWO TRIES IN HOMES WITH MINIMUM 10MBITS/SEC RAW RATE

VALUES IN THE TABLE ABOVE ARE IN MILLISECONDS.

OVERHEADS:					LINEAR	5	5	5
					PCM	NODES	NODES	NODES
IFG	PER	FRAME	LARQ	RTP_H	FRAME	CRA	CRA	CRA
	COLL	HDR	HDR	DR	SIZE	10E-6	10E-1	FIXED
0.018	0.206	0.07	8	40	160	13	4	2
MSEC	MSEC	MSEC	BYTES	BYTES	BYTES	COLLISIONS	COLLISIONS	COLLISIONS

FRAME HEADER INCLUDES PREAMBLE, FC, DA, SA, T/L, EOF

Fig. 16

<u>Field</u>	<u>Length</u>	<u>Meaning</u>
DA	6 octets	Destination Address
SA	6 octets	Source Address
Ethertype	2 octets	(TBD) = Vohn Link Control Frame - new IEEE assignment
Type	2 octets	1 = Timestamp Sync Message
Length	2 octets	= 4
Version	2 octets	= 0
SeqNum	2 octets	Timestamp Sync Message Sequence Number
Pad		Any value octet
FCS	4 octets	Frame Check Sequence

0926067-080601

Fig. 77(1)

<u>Field</u>	<u>Length</u>	<u>Meaning</u>
DA	6 octets	Destination Address
SA	6 octets	Source Address
Ethertype	2 octets	(TBD) = Vohn Link Control Frame - new IEEE assignment
Type	2 octets	2 = Timestamp Report Message
Length	2 octets	Number of additional octets in the signaling frame, starting with Version field and ending with the last octet of the Data Payload field. Minimum is 2.
Version	2 octets	= 0
TSMSeqNum	2 octets	Sequence number of TSM to which the Timestamp in this message is applicable.
Timestamp	4 octets	Timestamp of a previously transmitted Timestamp Report Message, corresponding to TSMSeqNum.
Frequency	2 octets	Resolution of the timestamp and Gtimestamp fields, in ticks/1.000ms. For example, value 32768 corresponds to one clock tick at 32.768Mhz, in which the LSBit of the Timestamp corresponds to a time of 0.030517578125usec. The Timestamp will rollover every 131 seconds = 2.2 minutes
NumGrants	2 octets	Number of Grant Timestamps specified in the payload of this control message. NumGrants may be zero. Each grant timestamp is accompanied by a Line ID and Call ID field. Including the Grant Timestamp, the total for each grant timestamp is 8 bytes.

10586097-00001

Fig. 77(2)

Line ID	2 octet s	Identifier of the Line termination associated with the immediately following GTimestamp.
Call ID	2 octet s	Identifier of the call instance on the Line termination associated with the immediately following GTimestamp.
GrantTimestamp	4 octet s	Grant Timestamp corresponding to the immediately preceding Line ID. This is the time at which the Proxy Gateway wishes to receive a future constant bit rate service flow packet in order to minimize delivery latency to subsequent delivery to a synchronous network. The time value corresponds to the time at the timing master. Additional packets for the identified service flow are expected to arrive at periodic intervals measured from this time.
...		additional instances of {Line ID, Call ID, Grant Timestamp} field tuples
Pad		Any value octet
FCS	4 octet s	Frame Check Sequence

0909067-00000000

Fig. 78

PIN NAME	CM-side Function (HPNA timing master)		Handset Function (HPNA timing slave)	
DPLL_REF_CLK	DPLL input clock	IN		
Grant[4]	Grant Present Indication	IN		
Grant[3]	Grant SID Value[3]	IN		
Grant[2]	Grant SID Value[2]	IN		
Grant[1]	Grant SID Value[1]	IN		
Grant[0]	Grant SID Value[0]	IN		
V_CLK_OUT			DPLL output clock	OUT
GPI[0]			Grant Present Indication[0]	OUT
GPI[1]			Grant Present Indication[1]	OUT

1. The first step is to identify the problem or question that needs to be answered. This involves understanding the context and the specific requirements of the task.

2. Next, it is important to gather relevant information and data. This can be done through research, consultation with experts, or by analyzing existing data sets.

3. Once the information is gathered, the next step is to analyze it. This involves identifying patterns, trends, and relationships that can help in understanding the problem.

4. After analysis, the next step is to develop a solution or plan. This may involve brainstorming ideas, evaluating different options, and selecting the most appropriate one.

5. The final step is to implement the solution. This involves putting the plan into action and monitoring the results to ensure that the problem is effectively solved.

PIN NAME	CM-side Function (HPNA timing master)		Handset Function (HPNA timing slave)	
DPLL_REF_CLK	DPLL input clock	IN		
Grant[4]	Grant Present Indication	IN		
Grant[3]	Grant SID Value[3]	IN		
Grant[2]	Grant SID Value[2]	IN		
Grant[1]	Grant SID Value[1]	IN		
Grant[0]	Grant SID Value[0]	IN		
V_CLK_OUT			DPLL output clock	OUT
Frame[0]			Frame boundary marker[0]	OUT
Frame[1]			Frame boundary marker[1]	OUT

FIG. 80

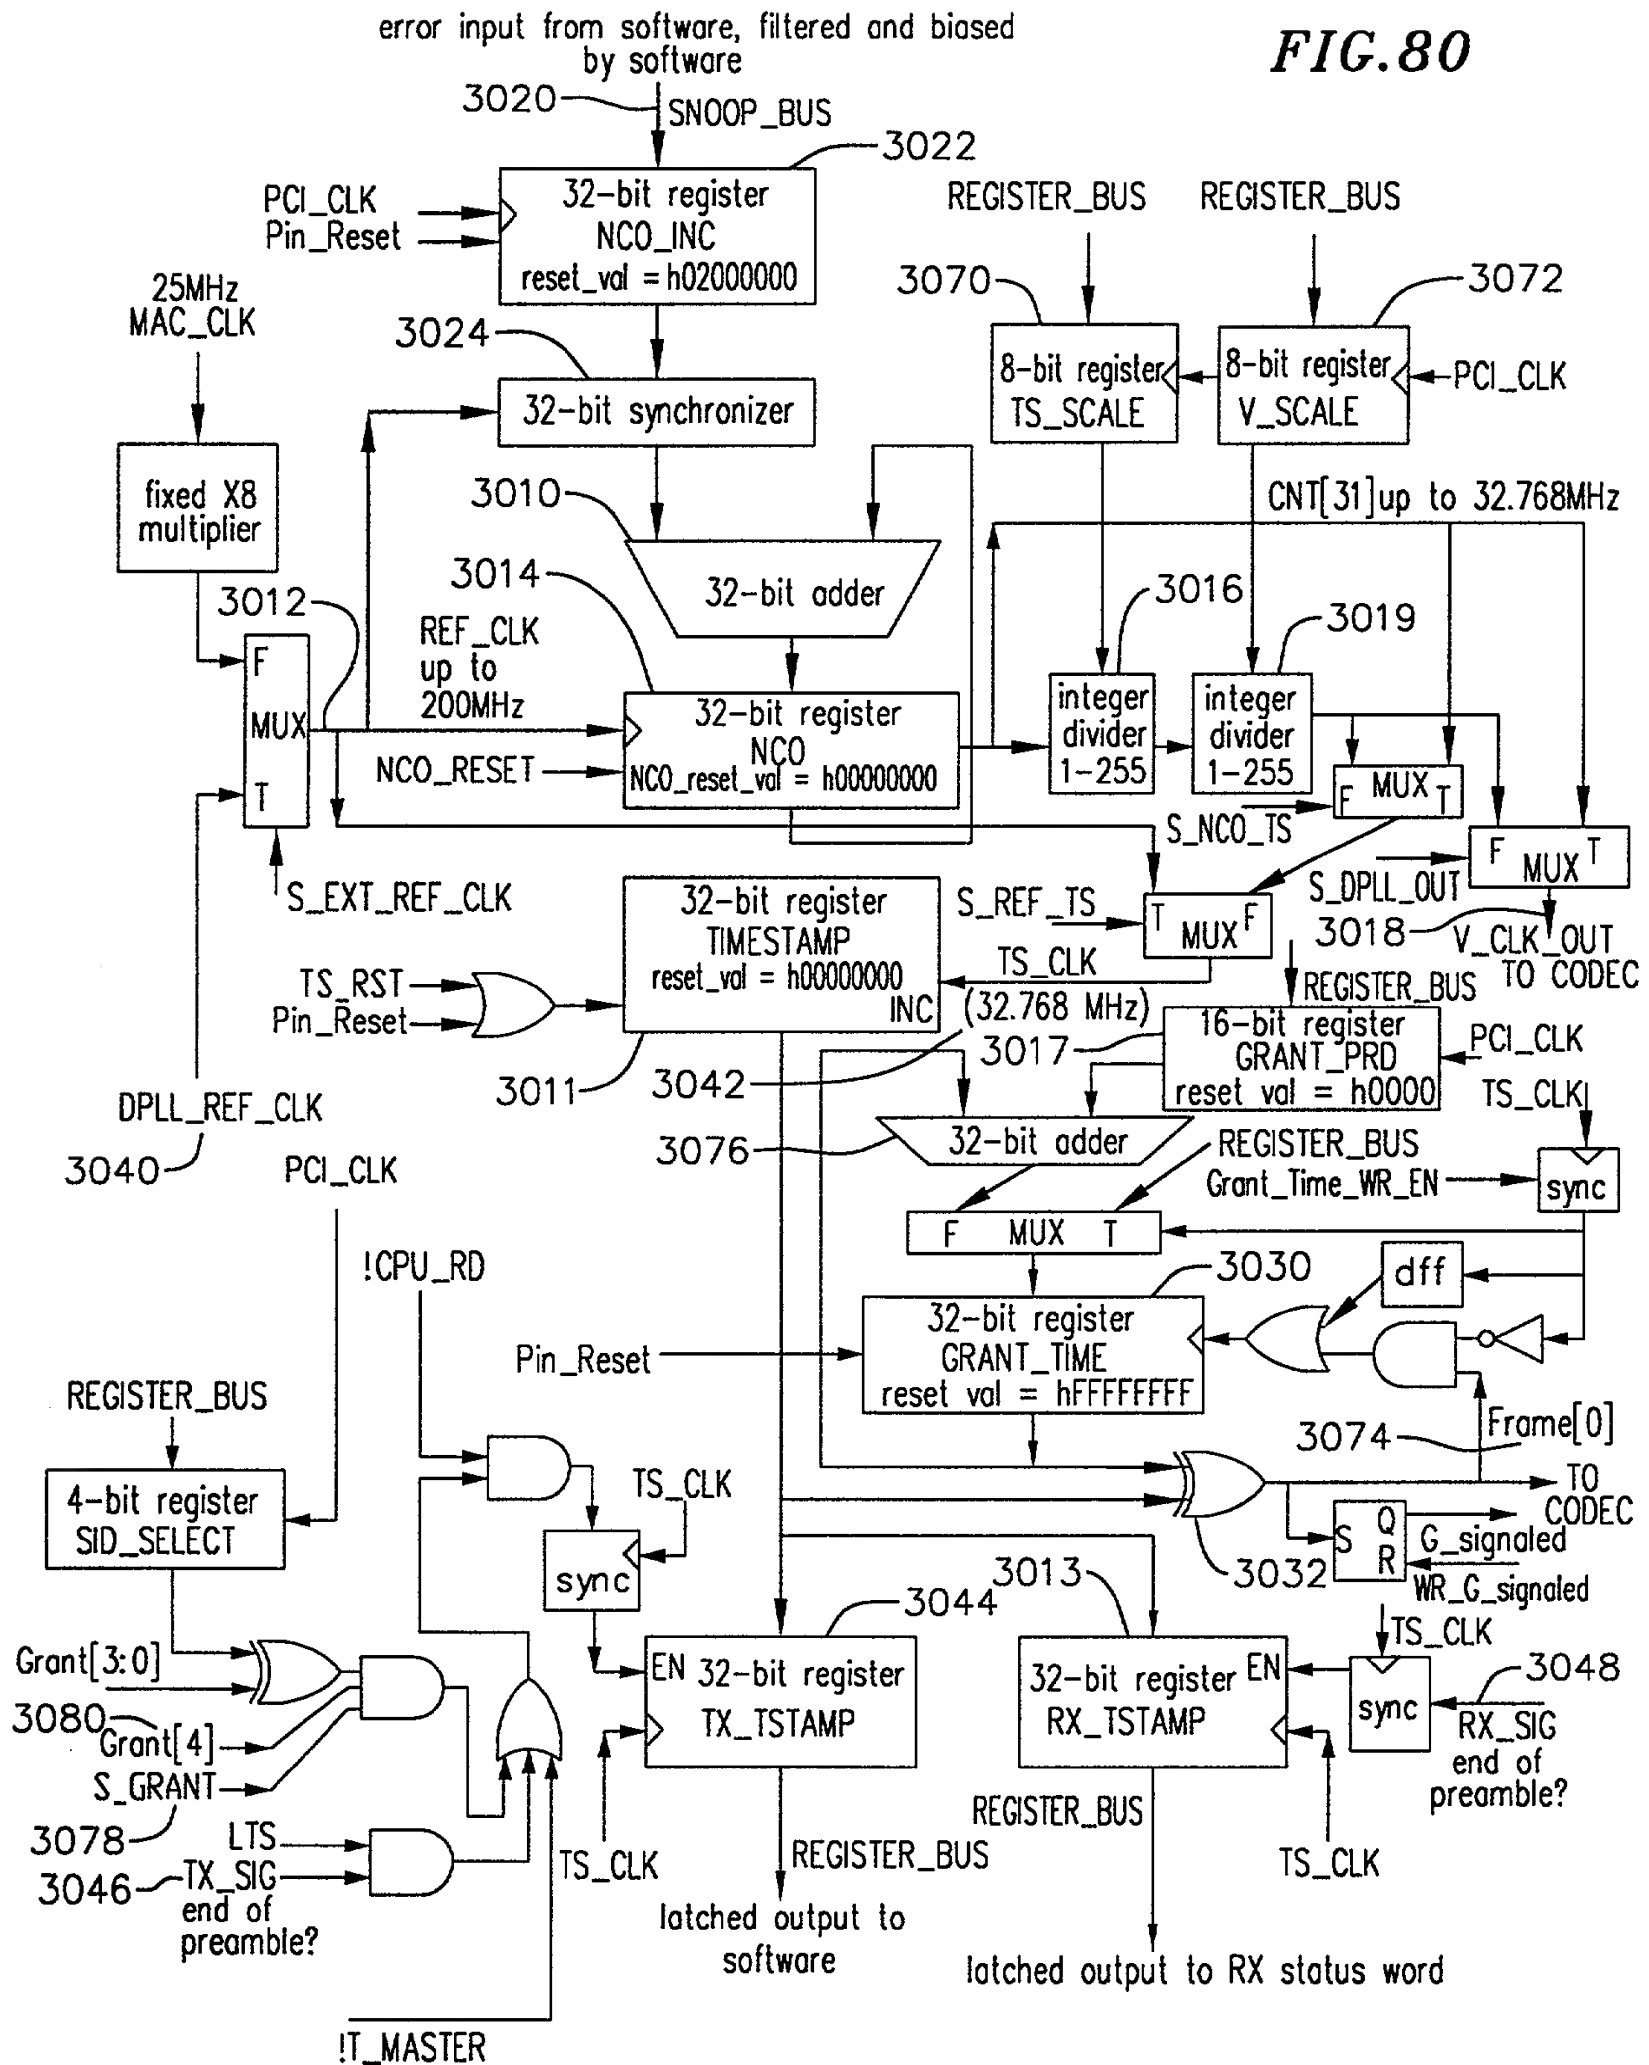
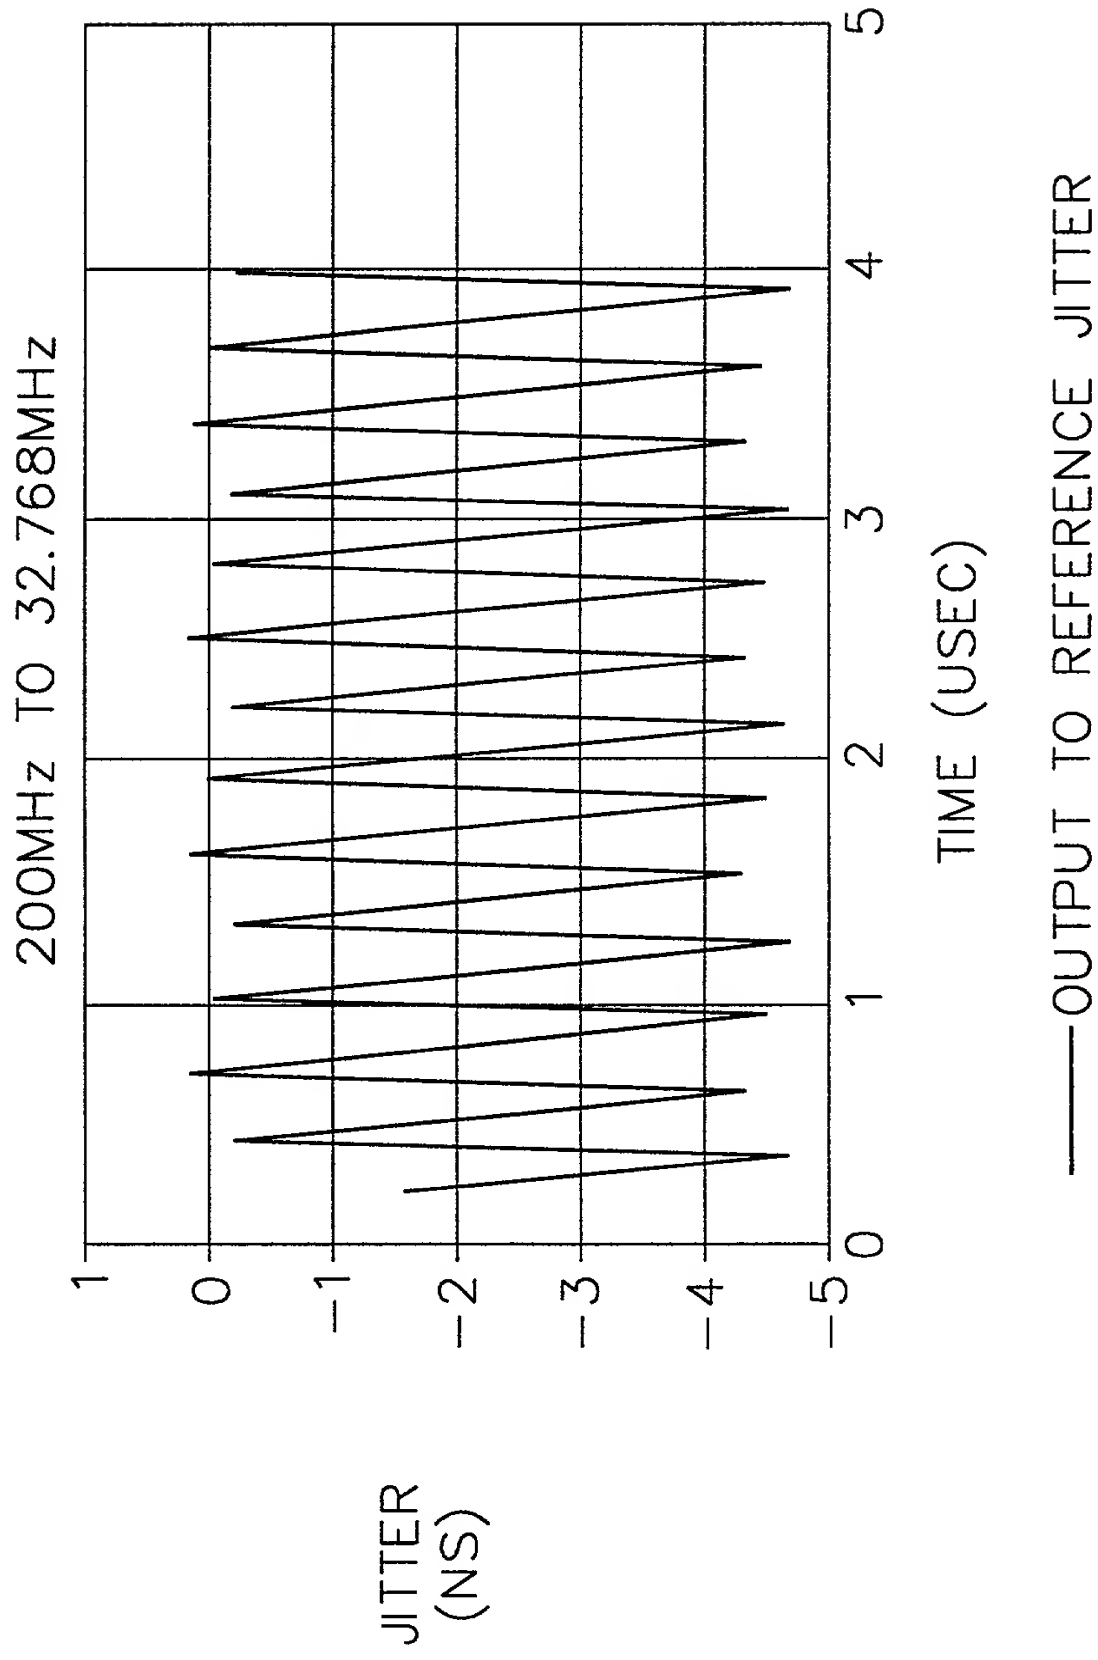


FIG. 81



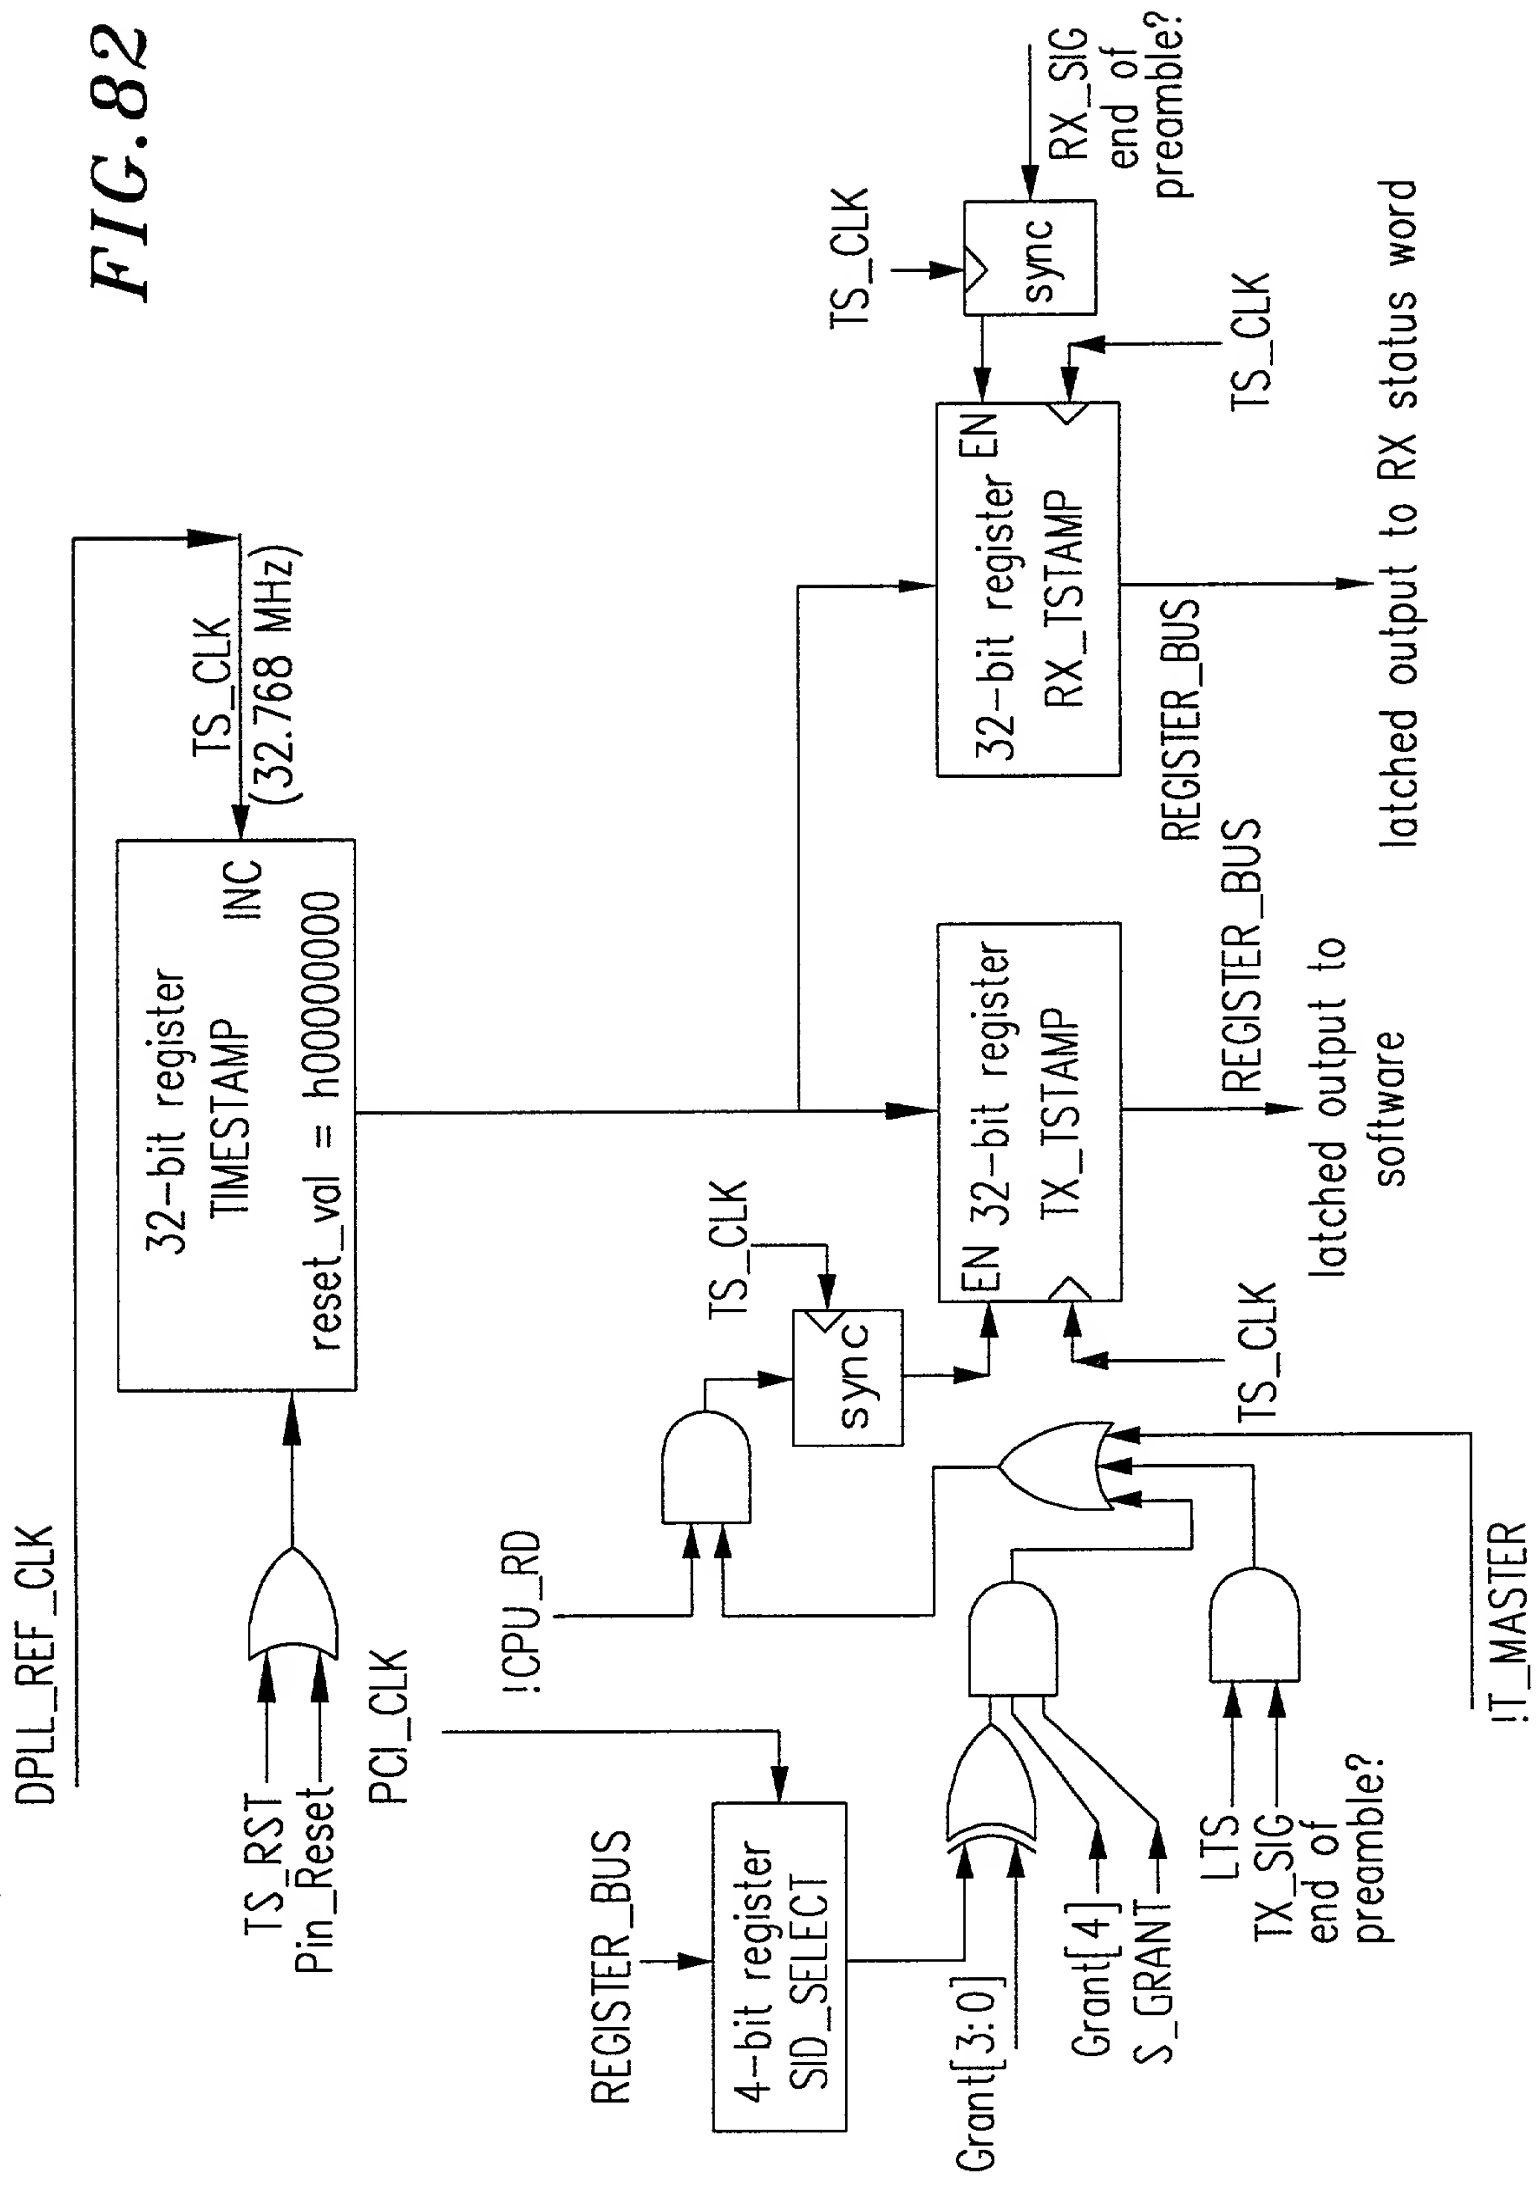


Fig. 83a

PIN NAME	CM-side Function (HPNA timing master)		Handset Function (HPNA timing slave)	
DPLL_REF_CLK	Timestamp input clock	IN	Timestamp input clock	
Grant[4]	Grant Present Indication	IN	NA	
Grant[3]	Grant SID Value[3]	IN	NA	
Grant[2]	Grant SID Value[2]	IN	NA	
Grant[1]	Grant SID Value[1]	IN	NA	
Grant[0]	Grant SID Value[0]	IN	NA	

Fig.83b

Bit locations	Field name	Description
7-3	Reserved	
2	TsReset	When set to 1, forces timestamp register to value of 0x00000000. When set to 0, allows timestamp register to increment by one for each detected DPLL_REF_CLK rising edge.
1	SGrant	When set to 1, causes timestamp to be latched into txTimeStampHigh and txTimeStampLow registers whenever the value of tscSID matches the value of input pins Grant[3:0] and Grant[4] is asserted. When set to 0, disables txTimeStampHigh and txTimeStampLow latching under the stated conditions.
0	TMaster	When set to 1, enables txTimeStampHigh and txTimeStampLow registers to be latched with timestamp values at times determined by frame transmissions (through the LTS descriptor bit) or grant events (through the sGrant descriptor bit). When set to 0, enables txTimeStampHigh and txTimeStampLow registers to be latched with timestamp values at times determined by txTimeStampHigh and txTimeStampLow register read accesses.

Default value of this register is 0x05

Bit locations	Field name	Description
7-4	Reserved	
3-0	SID	SID value that is to be matched by Grant[3:0] pins in order to cause a grant timestamp value to be latched. When the Grant[3:0] pins match the SID value and the Grant[4] input is 1 and the sGrant register bit is 1, then the current timestamp value will be latched into the txTimeStampHigh and txTimeStampLow registers.

Default value of this register is 0x00

Fig.83c

Country	Year	Population (millions)	Urban population (millions)	Urban population (%)	Population density (per sq km)	Urban population density (per sq km)	Population growth rate (%)	Urban population growth rate (%)	Population growth rate (%)	Urban population growth rate (%)	Population growth rate (%)	Urban population growth rate (%)
Algeria	1980	12.5	4.5	36	100	100	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	1985	13.5	5.5	41	110	110	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	1990	14.5	6.5	45	120	120	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	1995	15.5	7.5	48	130	130	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2000	16.5	8.5	51	140	140	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2005	17.5	9.5	54	150	150	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2010	18.5	10.5	57	160	160	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2015	19.5	11.5	59	170	170	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2020	20.5	12.5	61	180	180	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2025	21.5	13.5	63	190	190	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2030	22.5	14.5	64	200	200	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2035	23.5	15.5	66	210	210	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2040	24.5	16.5	67	220	220	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2045	25.5	17.5	69	230	230	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2050	26.5	18.5	70	240	240	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2055	27.5	19.5	71	250	250	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2060	28.5	20.5	72	260	260	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2065	29.5	21.5	73	270	270	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2070	30.5	22.5	74	280	280	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2075	31.5	23.5	75	290	290	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2080	32.5	24.5	76	300	300	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2085	33.5	25.5	76	310	310	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2090	34.5	26.5	77	320	320	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2095	35.5	27.5	78	330	330	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2100	36.5	28.5	78	340	340	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2105	37.5	29.5	79	350	350	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2110	38.5	30.5	79	360	360	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2115	39.5	31.5	80	370	370	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2120	40.5	32.5	80	380	380	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2125	41.5	33.5	81	390	390	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2130	42.5	34.5	81	400	400	1.5	1.5	1.5	1.5	1.5	1.5
Algeria	2135	43.5	35.5									

Default value of this register is undefined.

Fig. 83e

Default value of this register is undefined.

Fig. 83f

Default value of this register is undefined.

Fig 83g

Default value of this register is undefined.

FIG.84a

DPLL OUTPUT JITTER
TS=24.576MHz, TRM=1.0SEC, LG=0.9, IG=0.1, TGOOD=0.95,
M_J_DEV=1PPM


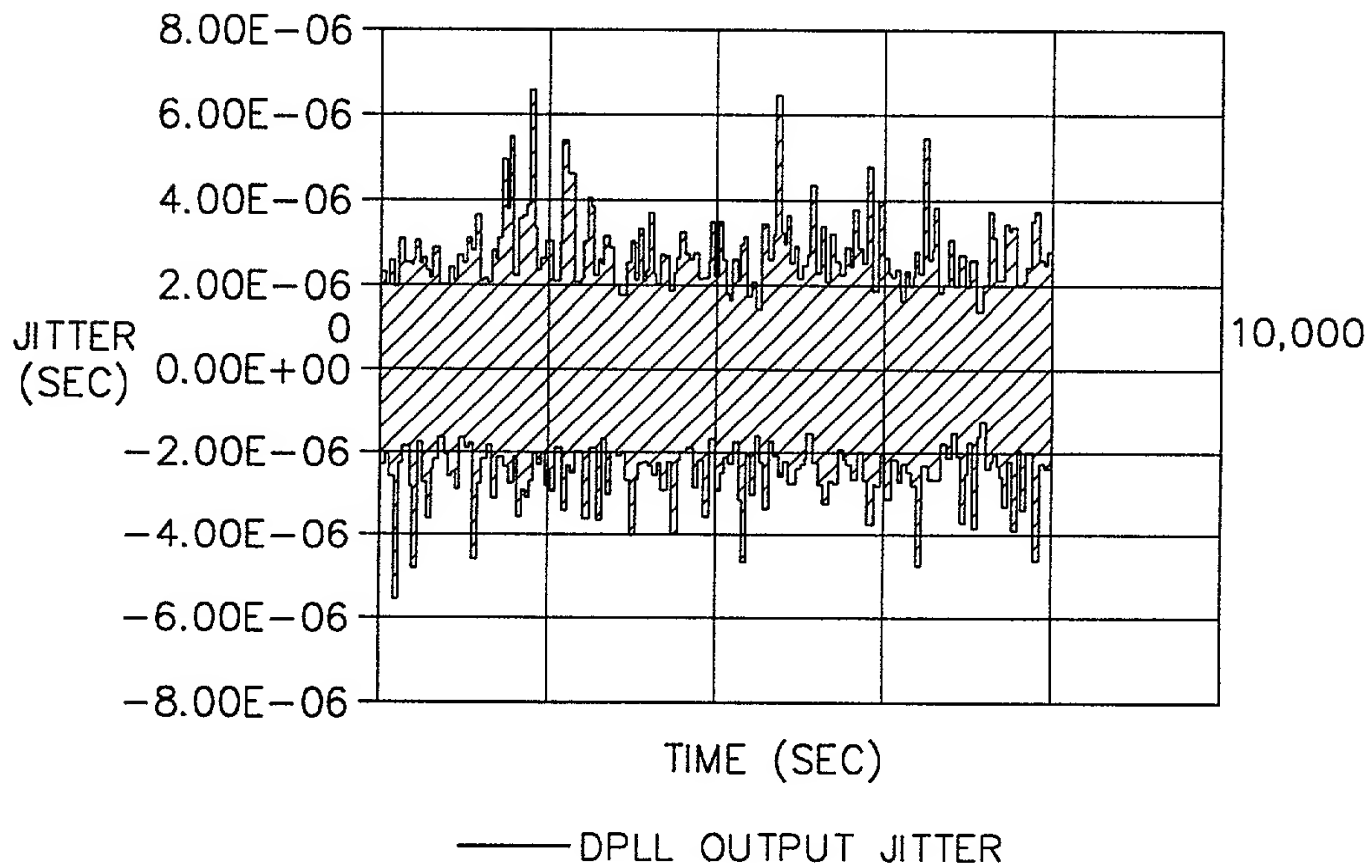


FIG.84b

DPLL OUTPUT JITTER
TS=24.576MHz, TRM=1.0SEC, LG=0.9, IG=0.1, TGOOD=0.95,
M_J_DEV=0PPM

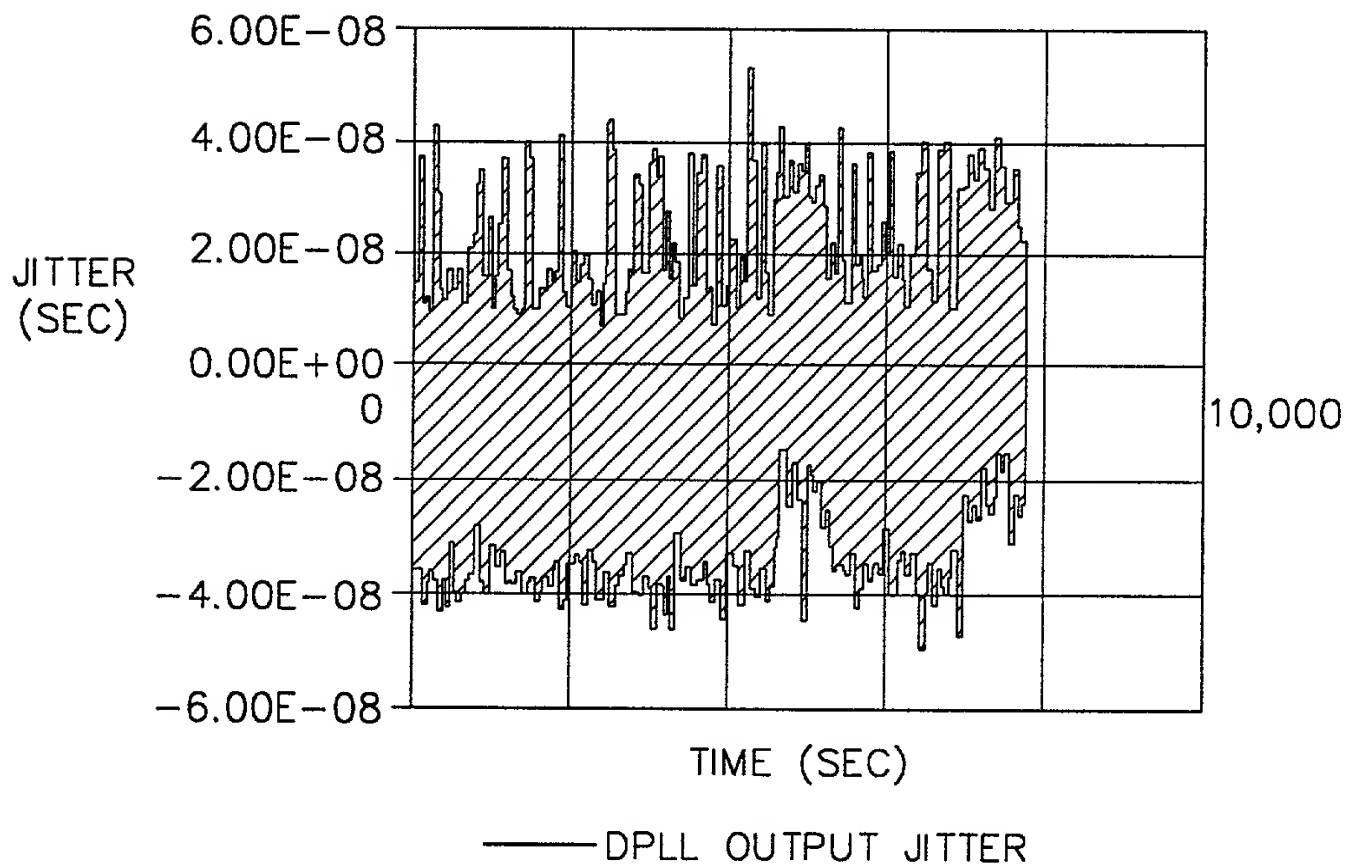

<u>Field</u>	<u>Length</u>	<u>Meaning</u>
DA	6 octets	Destination Address (FF.FF.FF.FF.FF.FF)
SA	6 octets	Source Address
Ethertype	2 octets	0x886c (HPNA Link Control Frame)
SSType	1 octet	= TBD
SSLength	1 octet	Number of additional octets in the control header, starting with the SSVersion field and ending with the second (last) octet of the Next Ethertype field. Minimum is 16.
SSVersion	1 octet	= 0
TRM_type	1 octet	Value of x00 means that this is a TRM containing a valid timestamp. Value of x01 means that the master does not have a valid clock and slaves should give local indication that they are no longer locked to a master reference. Value of x80 means that this is a TQM. Value of x81 means that this is a TSM. All other values are reserved.
TRMSeqNum	2 octets	Timestamp Report Message Sequence Number for this message. Sequence number of x0000 indicates an initial TRM, implying that Timestamp and PrevTRMSeqNum are both invalid.
PrevTRMSeqNum	2 octets	Sequence number of TRM to which the Timestamp in this message is applicable. The value of PrevTRMSeqNum is not necessarily equal to TRMSeqNum minus one. PrevTRMSeqNum is set to x0000 for the first TRM of a TRM pair.

Fig. 85(3)

<u>Field</u>	<u>Length</u>	<u>Meaning</u>
STimestamp	4 octets	Slot Timestamp corresponding to the immediately preceding Channel_ID. This is the time at which the TRM sender wishes to receive a future constant bit rate service flow packet in order to minimize overall latency of delivery to a synchronous network. Additional packets for the identified service flow are expected to arrive at periodic intervals measured from this time. The LSBit of the STimestamp corresponds to a time of $0.030517578125\mu\text{sec}$ = one clock tick at 32.768 MHz.
...		[additional instances of MACAddr, Channel_ID and Gtimestamp fields, until the number of Gtimestamp fields equals NumGrants]
Next Ethertype	2 octets	= 0
Pad	max (0, 44- SSLengt h octets	Any value octet
FCS	4 octets	

Fig. 86

<u>Field</u>	<u>Length</u>	<u>Meaning</u>
DA	6 octets	Destination Address (FF.FF.FF.FF.FF.FF)
SA	6 octets	Source Address
Ethertype	2 octets	0x886c (HPNA Link Control Frame)
SSType	1 octet	= 6
SSLength	1 octet	Number of additional octets in the control header, starting with the SSVersion field and ending with the second (last) octet of the Next Ethertype field. Minimum is 4.
SSVersion	1 octet	= 0
TRM_type	1 octet	Value of x80 means that this is a TQM.
Next Ethertype	2 octets	= 0
Pad	MIN(0, 4 0- SSLengt h) octets	Any value octet
FCS	4 octets	

Fig. 87

<u>Field</u>	<u>Length</u>	<u>Meaning</u>
DA	6 octets	Destination Address (FF.FF.FF.FF.FF.FF)
SA	6 octets	Source Address
Ethertype	2 octets	0x886c (HPNA Link Control Frame)
SSType	1 octet	= 6
SSLength	1 octet	Number of additional octets in the control header, starting with the SSVersion field and ending with the second (last) octet of the Next Ethertype field. Minimum is 4.
SSVersion	1 octet	= 0
TRM_type	1 octet	Value of x81 means that this is a TSM.
Next Ethertype	2 octets	= 0
Pad	MIN(0, 4 - SSLength) octets	Any value octet
FCS	4 octets	

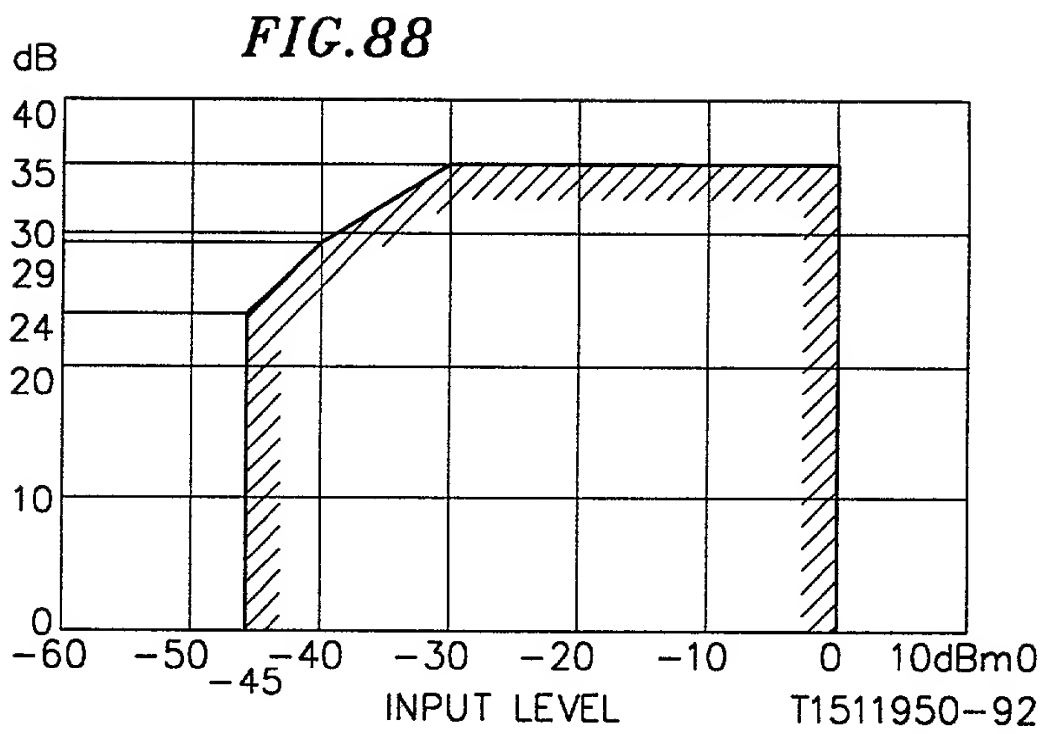


FIG.89a

INPUT LEVEL	UNIFORM QUANTIZER +COMPANDER SNR	THE REQUIRED SNR FOR ADC/DAC
0dBm	38.43dB	60dB
-30dBm	35.50dB	54dB
-40dBm	30.09dB	44dB

FIG.89b

INPUT LEVEL	G.712 SNR SPEC	THE TOTAL SNR WITH UNIFORM QUANTIZER+COMPANDER+JITTER CLOCK
0dBm	35dB	38.32dB (60dB ADC/DAC SNR IS USED)
-30dBm	35dB	35.42dB (54dB ADC/DAC SNR IS USED)
-40dBm	29dB	30.05dB (44dB ADC/DAC SNR IS USED)

FIG.89c

INPUT LEVEL	G.712 SNR SPEC	THE TOTAL SNR WITH UNIFORM QUANTIZER+COMPANDER+JITTER CLOCK
0dBm	35dB	38.38dB (60dB ADC/DAC SNR IS USED)
-30dBm	35dB	35.26dB (54dB ADC/DAC SNR IS USED)
-40dBm	29dB	30.03dB (44dB ADC/DAC SNR IS USED)

FIG.90

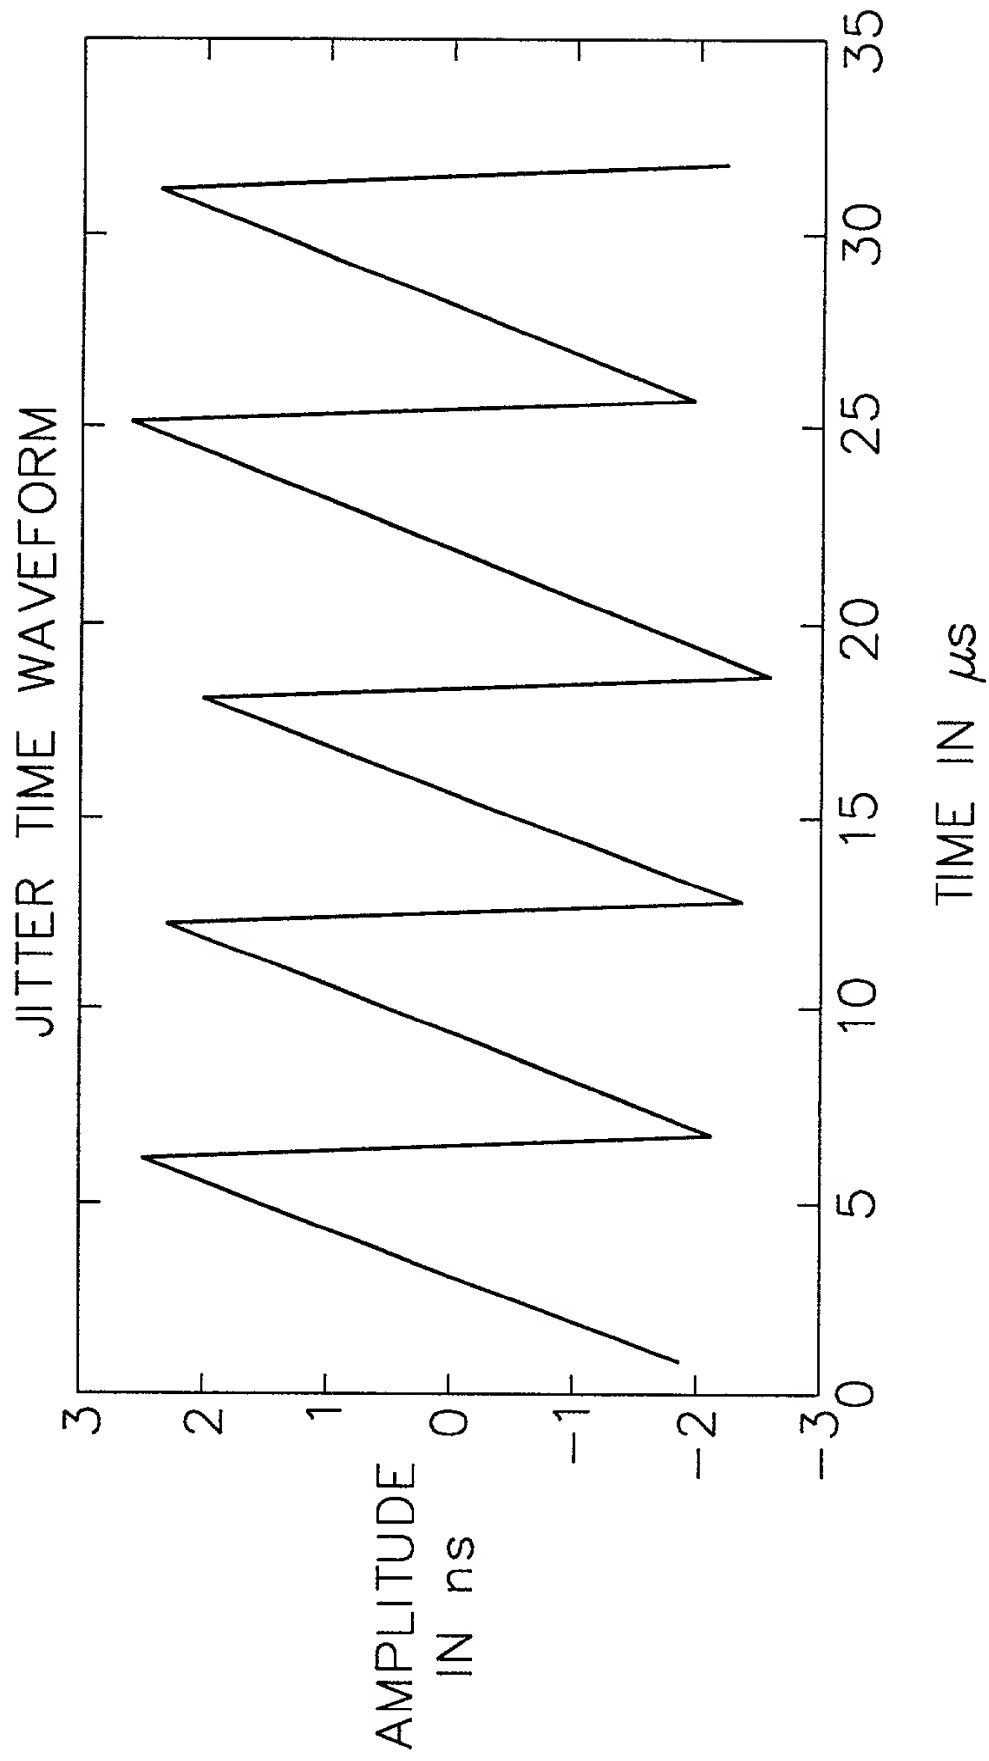


FIG. 91


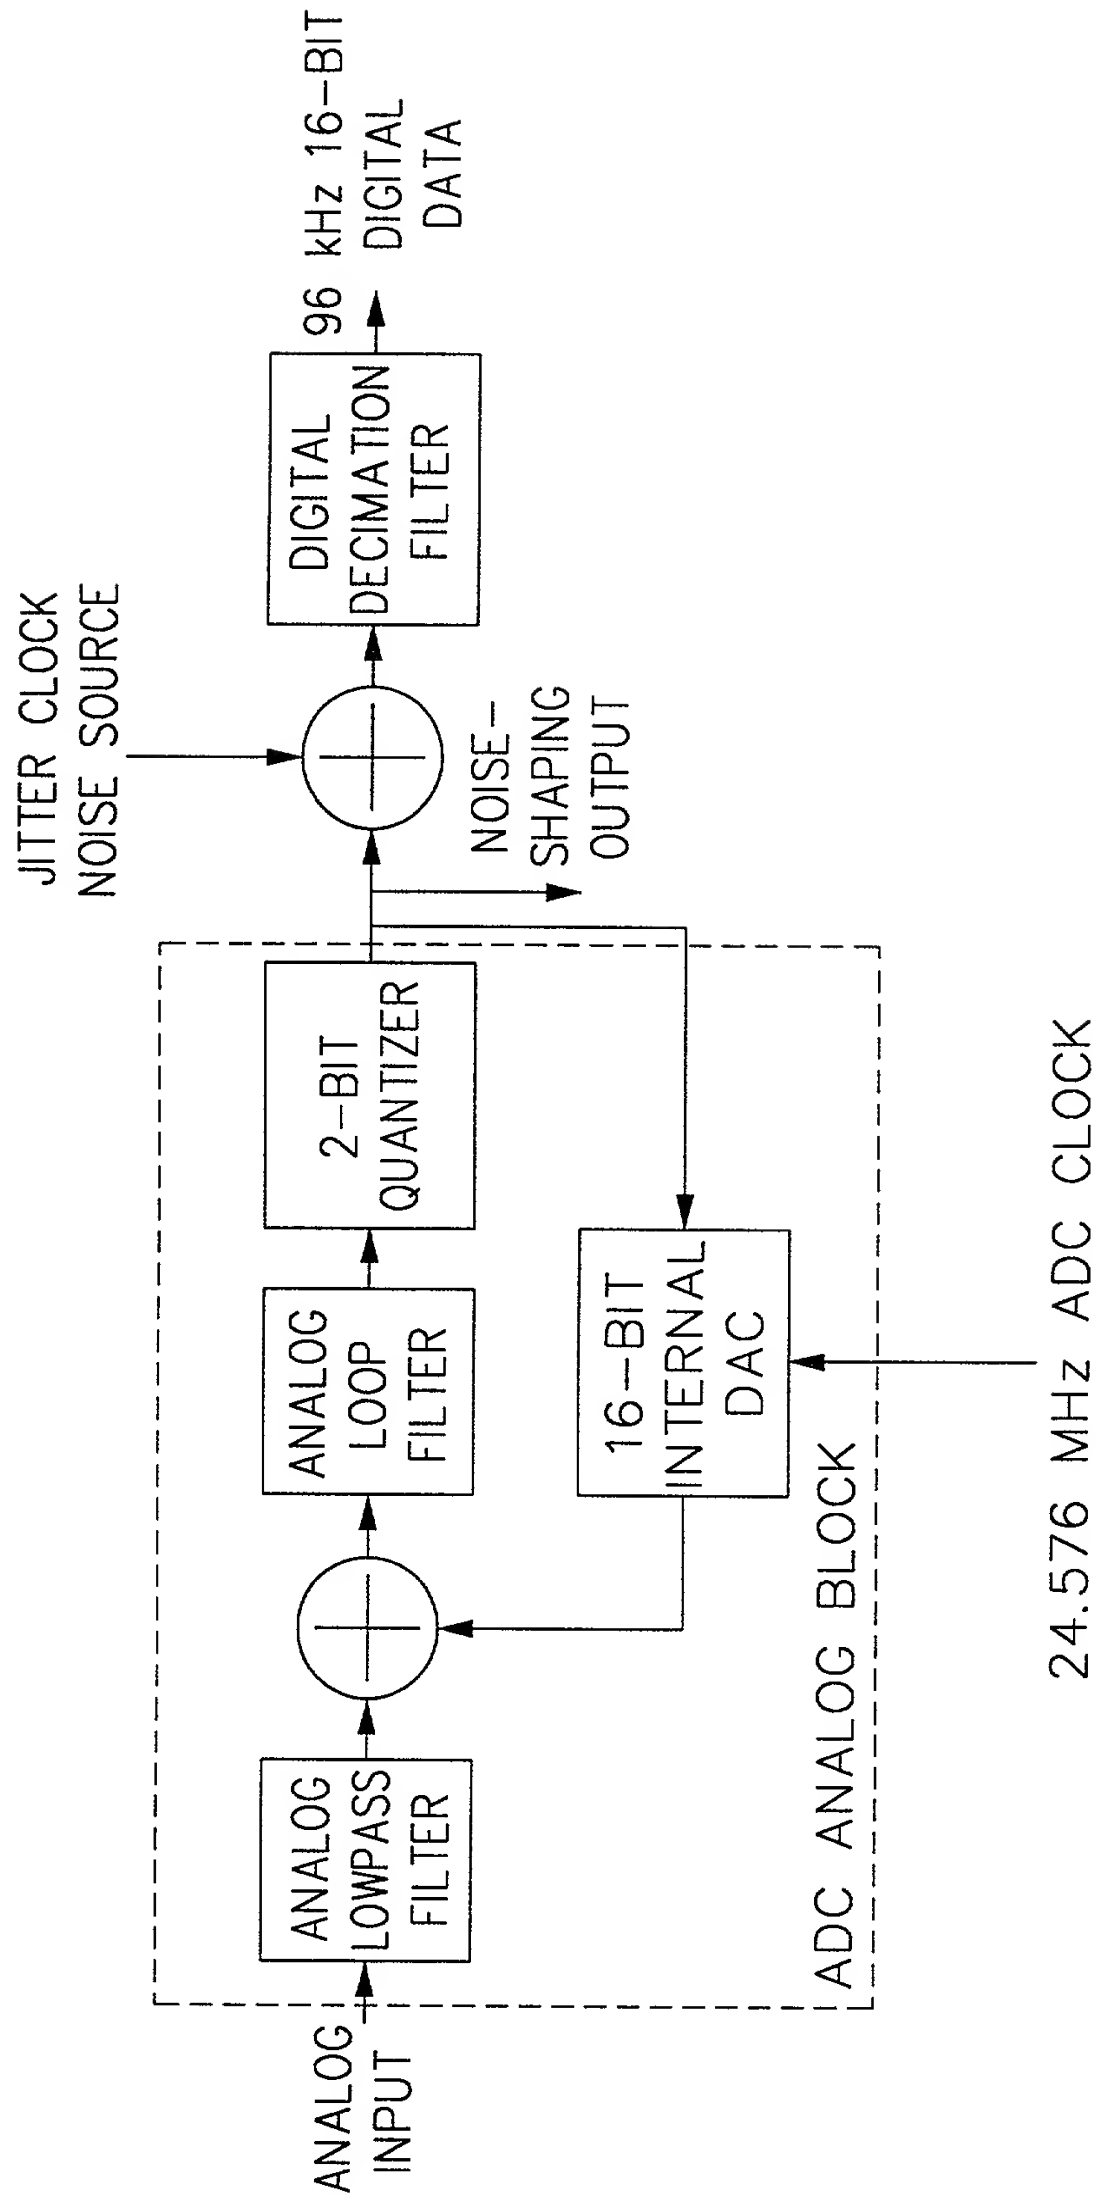


FIG. 92

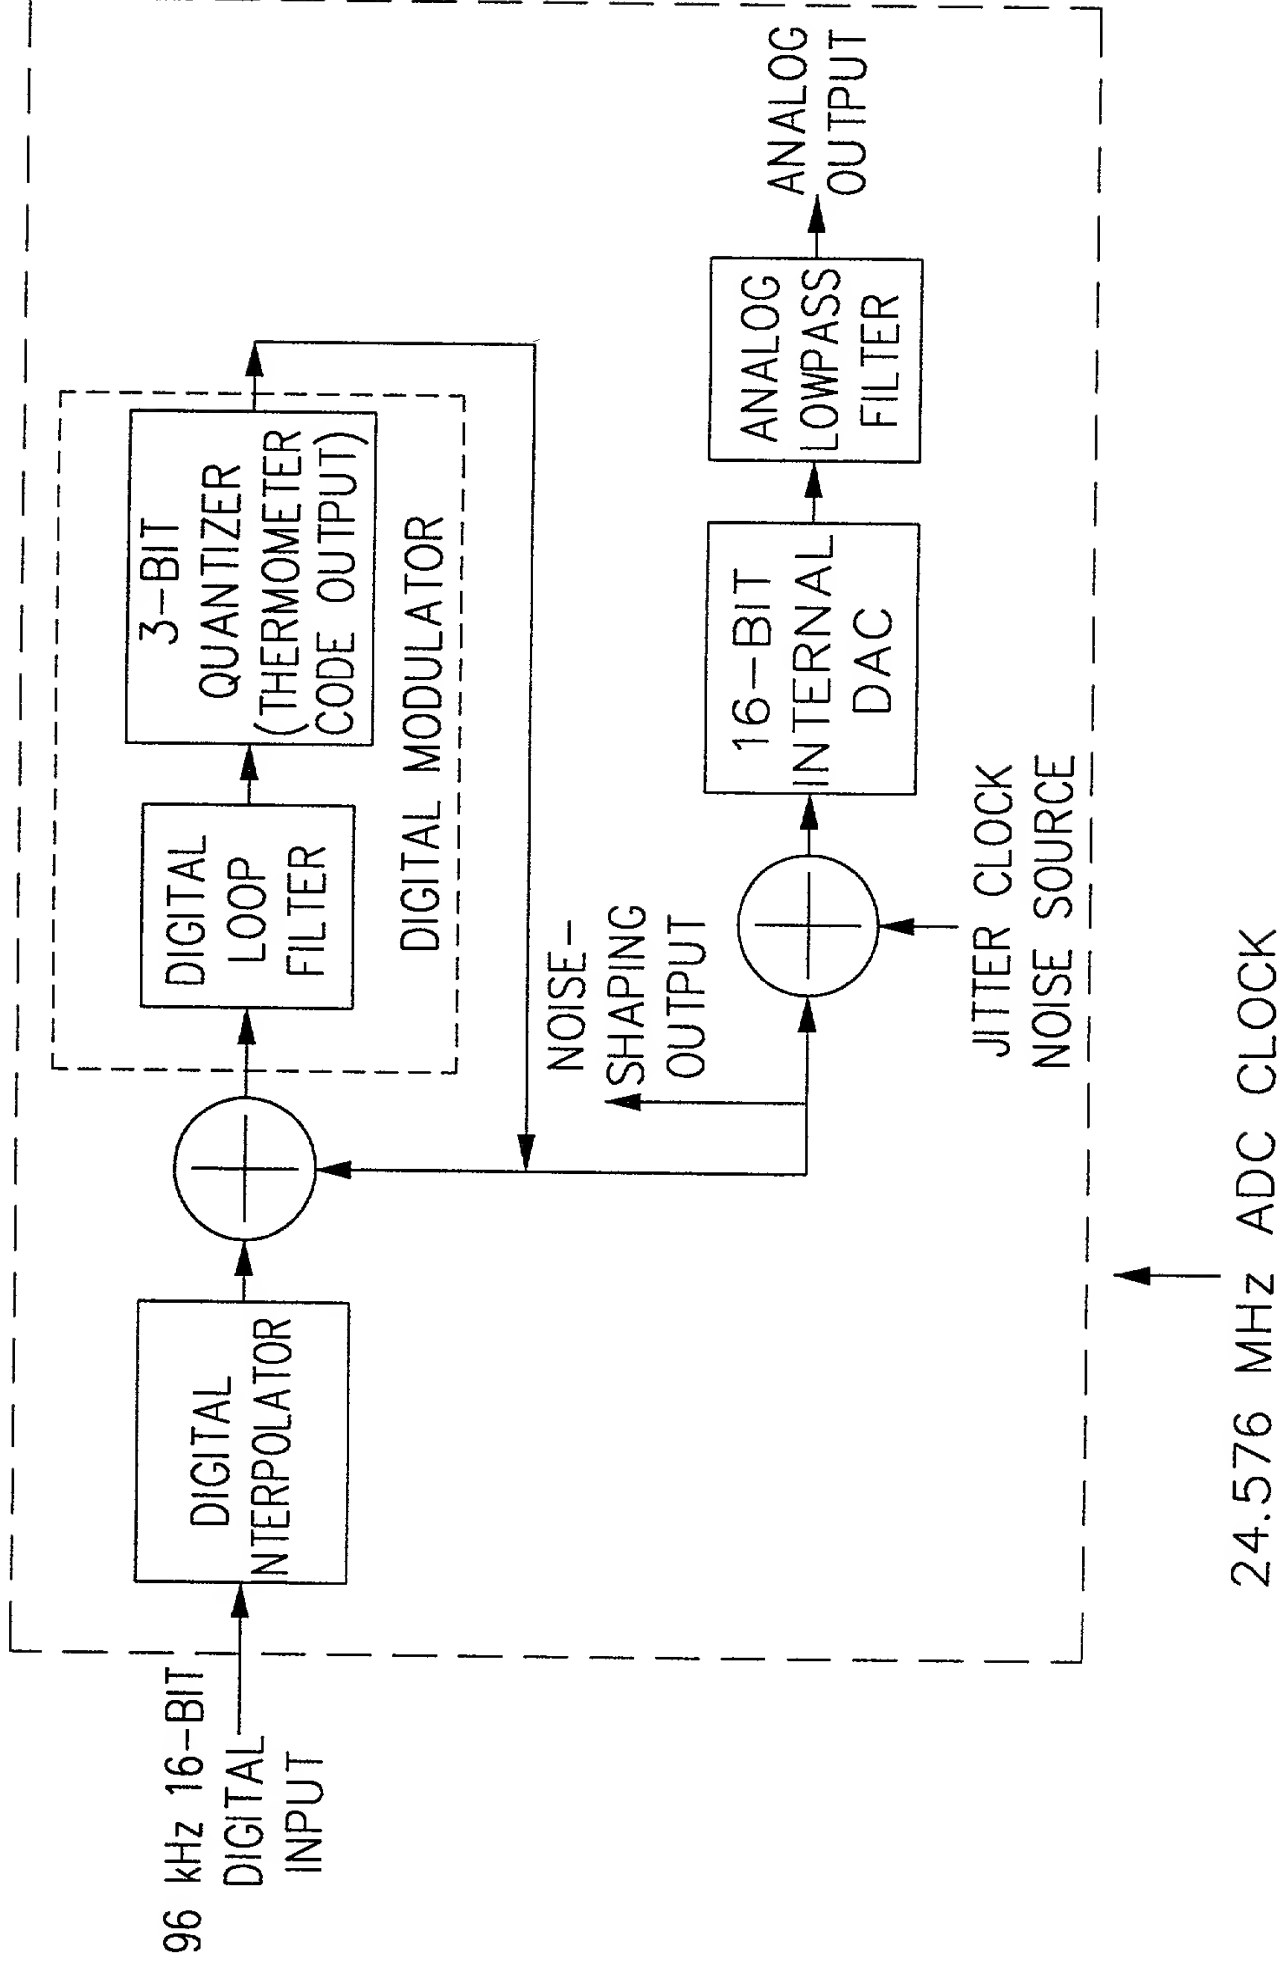

Variable	Mean	Standard Deviation	Minimum	Maximum
Age	34.5	10.2	22	55
Gender	0.5	0.5	0	1
Marital Status	0.6	0.5	0	1
Education	12.5	1.5	10	16
Income	3500	1500	1000	7000
Health	0.8	0.2	0	1
Stress	0.7	0.3	0	1
Exercise	0.4	0.5	0	1
Smoking	0.2	0.4	0	1
Alcohol	0.1	0.3	0	1
Depression	0.3	0.5	0	1
Loneliness	0.4	0.5	0	1
Life Satisfaction	0.6	0.4	0	1
Quality of Life	0.7	0.3	0	1
Overall Health	0.8	0.2	0	1
Physical Health	0.9	0.1	0	1
Mental Health	0.7	0.3	0	1
Social Health	0.6	0.4	0	1
Emotional Health	0.5	0.5	0	1
Behavioral Health	0.4	0.6	0	1
Environmental Health	0.3	0.7	0	1
Occupational Health	0.2	0.8	0	1
Financial Health	0.1	0.9	0	1
Family Health	0.0	1.0	0	1
Community Health	0.0	1.0	0	1
National Health	0.0	1.0	0	1
Global Health	0.0	1.0	0	1

Octet	Field	Length	Description
	ConfigV1	1	Force use of HPNA 1.x mode, highest precedence of config flags.
	Reserved	2	Shall be sent as 0 and ignored by 2.0 stations when received.
	Highest Version	3	This station's highest supported HPNA version: 0x000 -- Reserved 0x001 -- HPNA 1.0 0x010 -- HPNA 2.0 0x001-0x111 Reserved

Country	Year	Population (millions)	Urban population (millions)	Urban population (%)	Population density (per sq km)	Urban population density (per sq km)	Population growth rate (%)	Urban population growth rate (%)	Population growth rate (%)	Urban population growth rate (%)	Population growth rate (%)	Urban population growth rate (%)
Algeria	1980	10.0	4.0	40.0	100	250	1.5	2.5	1.5	2.5	1.5	2.5
Algeria	1985	10.5	4.5	42.9	105	262.5	1.8	3.0	1.8	3.0	1.8	3.0
Algeria	1990	11.0	5.0	45.5	110	275	2.0	3.5	2.0	3.5	2.0	3.5
Algeria	1995	11.5	5.5	47.8	115	287.5	2.2	4.0	2.2	4.0	2.2	4.0
Algeria	2000	12.0	6.0	50.0	120	300	2.5	4.5	2.5	4.5	2.5	4.5
Algeria	2005	12.5	6.5	52.0	125	312.5	2.8	5.0	2.8	5.0	2.8	5.0
Algeria	2010	13.0	7.0	53.8	130	325	3.0	5.5	3.0	5.5	3.0	5.5
Algeria	2015	13.5	7.5	55.6	135	337.5	3.2	6.0	3.2	6.0	3.2	6.0
Algeria	2020	14.0	8.0	57.1	140	350	3.5	6.5	3.5	6.5	3.5	6.5
Algeria	2025	14.5	8.5	58.6	145	362.5	3.8	7.0	3.8	7.0	3.8	7.0
Algeria	2030	15.0	9.0	60.0	150	375	4.0	7.5	4.0	7.5	4.0	7.5
Algeria	2035	15.5	9.5	61.3	155	387.5	4.2	8.0	4.2	8.0	4.2	8.0
Algeria	2040	16.0	10.0	62.5	160	400	4.5	8.5	4.5	8.5	4.5	8.5
Algeria	2045	16.5	10.5	63.6	165	412.5	4.8	9.0	4.8	9.0	4.8	9.0
Algeria	2050	17.0	11.0	64.7	170	425	5.0	9.5	5.0	9.5	5.0	9.5
Algeria	2055	17.5	11.5	65.7	175	437.5	5.2	10.0	5.2	10.0	5.2	10.0
Algeria	2060	18.0	12.0	66.7	180	450	5.5	10.5	5.5	10.5	5.5	10.5
Algeria	2065	18.5	12.5	67.6	185	462.5	5.8	11.0	5.8	11.0	5.8	11.0
Algeria	2070	19.0	13.0	68.4	190	475	6.0	11.5	6.0	11.5	6.0	11.5
Algeria	2075	19.5	13.5	69.2	195	487.5	6.2	12.0	6.2	12.0	6.2	12.0
Algeria	2080	20.0	14.0	70.0	200	500	6.5	12.5	6.5	12.5	6.5	12.5
Algeria	2085	20.5	14.5	70.7	205	512.5	6.8	13.0	6.8	13.0	6.8	13.0
Algeria	2090	21.0	15.0	71.4	210	525	7.0	13.5	7.0	13.5	7.0	13.5
Algeria	2095	21.5	15.5	72.1	215	537.5	7.2	14.0	7.2	14.0	7.2	14.0
Algeria	2100	22.0	16.0	72.7	220	550	7.5	14.5	7.5	14.5	7.5	14.5
Algeria	2105	22.5	16.5	73.3	225	562.5	7.8	15.0	7.8	15.0	7.8	15.0
Algeria	2110	23.0	17.0	73.9	230	575	8.0	15.5	8.0	15.5	8.0	15.5
Algeria	2115	23.5	17.5	74.5	235	587.5	8.2	16.0	8.2	16.0	8.2	16.0
Algeria	2120	24.0	18.0	75.0	240	600	8.5	16.5	8.5	16.5	8.5	16.5
Algeria	2125	24.5	18.5	75.5	245	612.5	8.8	17.0	8.8	17.0	8.8	17.0
Algeria	2130	25.0	19.0									

<u>Field</u>	<u>Length</u>	<u>Meaning</u>
CSEType	1 octet	X00 = signifies a CSS Extension type
CSELength	1 octet	X08 = Number of additional octets in this CSEType. CSELength is always x08 for CSEType = x00 = CSS
CSS_MAC	6 octets	MAC address of client station
CSS_SEQ	2 octets	<p>CSS sequence, 8 two-bit values concatenated: 0-2 indicate a specific signaling slot, while 3 indicates the use of a randomly selected value chosen by the client at the time of the collision.</p> <p>X0000 - xBFFF = assigned CSS_SEQ value for the node possessing the MAC address specified in CSS_MAC</p> <p>XC000 - xFEFF = reserved</p> <p>XFF00 = indication by the client node specified by CSS_MAC that it is no longer an active sender of link layer priority 6 frames (equivalent to a "0 active channels" indication)</p> <p>XFF01 - xFFFE = request by the client node specified by CSS_MAC for a CSS Sequence from the master node. The 8 Least significant bits indicate the number of active channels which are sending link layer.</p> <p>priority 6 frames for this client.</p> <p>XFFFF - reserved</p>

Fig. 95

2-bit CSS register value (binary)	Signal slot integer (decimal)
00	0
01	1
10	2
11	Random in range [0,2]

TOP SECRET - CONFIDENTIAL

Bit Number	Value
7:0	Station Type: 0 – HomePNA 1.x station 1 – 10M8 station in V1M2 Mode 2 – 10M8 station in V1M2 Mode, that has detected a recent 1M8 transmission with PCOM Station Type = 0 Other values reserved
31:8	Reserved, must be 0 on transmission

Fig. 96

Precedence	Variable
1	ConfigV1
2	ConfigV1M2
3	ConfigV2
4	V1_DETECTED
4	V1_SINGALED

Fig. 97